


Plug-in timer

85.02 - 2 Pole 10 A

85.03 - 3 Pole 10 A

85.04 - 4 Pole 7 A

- Multifunctions
- Seven time scales, from 0.05 s to 100 h
- 94 series sockets for 35 mm rail (EN 60715) mount with push-in and screw terminal

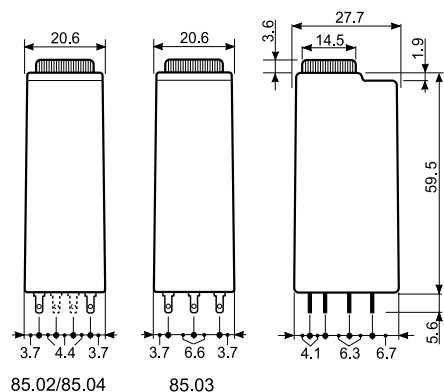

For UL RATINGS SEE:

"General technical information" page V

Contact specification

Contact configuration		2 CO (DPDT)	3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current	A	10/20	10/20	7/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/250
Rated load AC1	VA	2500	2500	1750
Rated load AC15 (230 V AC)	VA	500	500	350
Single phase motor rating (230 V AC)	kW	0.37	0.37	0.125
Breaking capacity DC1: 30/110/220 V	A	10/0.25/0.12	10/0.25/0.12	7/0.25/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi	AgNi

Supply specification

Nominal voltage (U_N)	V AC (50/60 Hz)	230...240	230...240	230...240
	V AC/DC	12 - 24 - 48 - 110...125 (non polarized)		
Rated power AC/DC	VA (50 Hz)/W	2/2	2/2	2/2
Operating range	AC	$(0.85...1.1)U_N$	$(0.85...1.1)U_N$	$(0.85...1.1)U_N$
	DC	$(0.85...1.1)U_N$	$(0.85...1.1)U_N$	$(0.85...1.1)U_N$

Technical data

Specified time range		(0.05...1)s, (0.5...10)s, (5...100)s, (0.5...10)min, (5...100)min, (0.5...10)h, (5...100)h		
Repeatability	%	± 2	± 2	± 2
Recovery time	ms	≤ 20	≤ 20	≤ 20
Minimum control impulse	ms	—	—	—
Setting accuracy-full range	%	± 5	± 5	± 5
Electrical life at rated load in AC1	cycles	$200 \cdot 10^3$	$200 \cdot 10^3$	$150 \cdot 10^3$
Ambient temperature range	°C	-20...+60	-20...+60	-20...+60
Protection category		IP 40	IP 40	IP 40

Approvals (according to type)



Ordering information

Example: 85 series timer, 4 CO (4PDT), 24 V AC/DC supply voltage, AI, DI, GI, SW functions.

Series ——— Type ——— 0 = Multifunction (AI, DI, GI, SW)* * AI = On-delay DI = Interval GI = Pulse delayed SW = Symmetrical flasher (starting pulse on) No. of poles ——— 2 = 2 pole - 10 A 3 = 3 pole - 10 A 4 = 4 pole - 7 A	8 5 . 0 4 . 0 . 0 2 4 . 0 0 0 0	Supply voltage 012 = 12 V AC/DC 024 = 24 V AC/DC 048 = 48 V AC/DC 125 = (110...125)V AC/DC 240 = (230...240)V AC Supply version 0 = AC (50/60 Hz)/DC 8 = AC (50/60 Hz) for 240 V only
---	---	--

Technical data

Insulation						
Dielectric strength			85.02, 85.03		85.04	
			between input and output circuit	V AC	2000	2000
			between open contacts	V AC	1000	1000
			between adjacent contacts	V AC	2000	1550
Insulation (1.2/50 μs) between input and output			kV	6	4	
EMC specifications						
Type of test			Reference standard			
Electrostatic discharge	contact discharge		EN 61000-4-2		n.a.	
	air discharge		EN 61000-4-2		8 kV	
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)			EN 61000-4-3		15 V/m	
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals			EN 61000-4-4		4 kV	
Surges (1.2/50 μs) on Supply terminals	common mode		EN 61000-4-5		4 kV	
	differential mode		EN 61000-4-5		2 kV	
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals			EN 61000-4-6		10 V	
Power-frequency (50 Hz)			EN 61000-4-8		30 A/m	
Radiated and conducted emission			EN 55022		class B	
Other data						
Power lost to the environment	without contact current		W	1.6		
	with rated current		W	3.7 (85.02)	4.7 (85.03)	3.6 (85.04)

Times scales

(0.05...1)s	(0.5...10)s	(5...100)s	(0.5...10)min	(5...100)min	(0.5...10)h	(5...100)h
1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3

NOTE: time scales and functions must be set before energising the timer.


Functions

U = Supply voltage
— = Output contact


LED	Supply voltage	NO (SPDT-NO) output contact	Contacts	
			Open	Closed
	OFF	Open	x1 - x4	x1 - x2
	ON	Open	x1 - x4	x1 - x2
	ON	Open (Timing in Progress)	x1 - x4	x1 - x2
	ON	Closed	x1 - x2	x1 - x4

Wiring diagram


Type: 85.02, 85.03, 85.04




85.02



85.03




85.04



(AI) On-delay.

Apply power to timer.
Output contacts transfer after preset time has elapsed.
Reset occurs when power is removed.




(DI) Interval.

Apply power to timer.
Output contacts transfer immediately.
After the preset time has elapsed, contacts reset.



(GI) Pulse delayed.


Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs after a fixed time of 0.5 s.



(SW) Symmetrical flasher (starting pulse on).


Apply power to timer.
Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied.
The ratio is 1:1 (time on = time off).

U = Supply voltage
S = Signal switch
U_c = Supply voltage to the timer
11-14 = Self-holding contact
— = Output contact

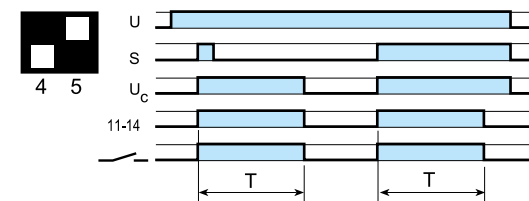


Signal ON Pulse


On momentary closure of Signal Switch (S) > 50 ms, the output contacts transfer and remain so (with self-holding on contact 11-14) for the duration of the preset delay, after which they reset.




85.02



85.03



85.04




94.P4

Approvals
(according to type):



060.72



060.48

Push-in terminal socket panel or 35 mm
(EN 60715) rail mount

For timer type

94.P3
Blue

85.03

94.P4
Blue

85.02, 85.04

Accessories

Metal retaining clip

094.81

6-way jumper link

094.56

Identification tag

094.00.4

2-way jumper link

094.52

2-way jumper link

097.52

Marker tag holder

097.00

Sheet of marker tags for marker tag holder 097.00, 48 tags,
6 x 12 mm for CEMBRE's thermal transfer printers

060.48

Sheet of marker tags for marker tag holder 097.00, 72 tags,
6 x 12 mm

060.72

Technical data

Rated values

10 A - 250 V

Dielectric strength

2 kV AC

Protection category

IP 20

Ambient temperature

°C -40...+70

Wire strip length

mm 8

Min. wire size for 94.P3 and 94.P4 sockets

solid wire

stranded wire

mm² 0.5

0.5

AWG 21

21

Max. wire size for 94.P3 and 94.P4 sockets

solid wire


stranded wire

mm² 2 x 1.5 / 1 x 2.5

2 x 1.5 / 1 x 2.5

AWG 2 x 18 / 1 x 14

2 x 18 / 1 x 14


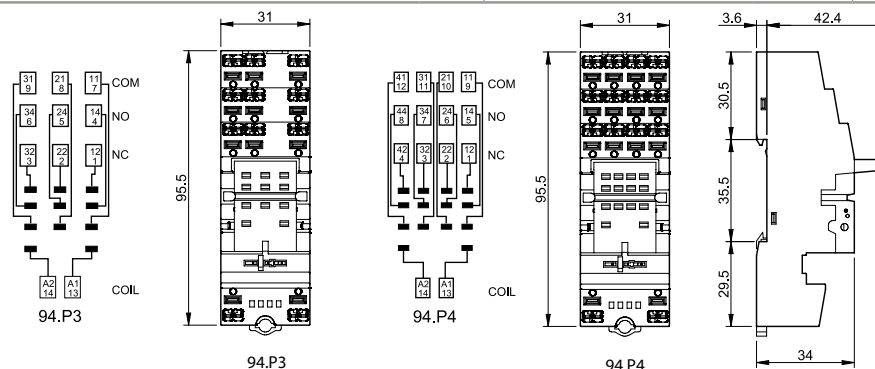


6-way jumper link for 94.P3 and 94.P4 sockets

094.56 (blue)

Rated values

10 A - 250 V




094.56

2-way jumper link for 94.P3 and 94.P4 sockets

094.52

Rated values

10 A - 250 V




094.52

2-way jumper link for 94.P3 and 94.P4 sockets

097.52

Rated values


10 A - 250 V



097.52

Marker tag holder for 94.P3 and 94.P4 sockets

097.00




097.00

94.04

Approvals
(according to type):



060.72



060.48

Screw terminal (Box clamp) socket panel or 35 mm
(EN 60715) rail mount
For timer type






94.02 Blue	94.02.0 Black	94.03 Blue	94.03.0 Black	94.04 Blue	94.04.0 Black
85.02		85.03		85.04	

Accessories

Metal retaining clip	094.81				
6-way jumper link	094.06	094.06.0	094.06	094.06.0	094.06.0
Identification tag	094.00.4				
Marker tag holder	097.00				
Sheet of marker tags marker tag holder 097.00, 48 tags, 6 x 12 mm for CEMBRE's thermal transfer printers	060.48				
Sheet of marker tags for marker tag holder 097.00, 72 tags, 6 x 12 mm	060.72				

Technical data

Rated values	10 A - 250 V				
Dielectric strength	2 kV AC				
Protection category	IP 20				
Ambient temperature	°C	-40...+70			
Screw torque	Nm	0.5			
Wire strip length	mm	8			
Max. wire size for 94.02/03/04 sockets		solid wire		stranded wire	
	mm ²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	




094.06

6-way jumper link for 94.02, 94.03 and 94.04 sockets

094.06 (blue)	094.06.0 (black)
10 A - 250 V	

Rated values






94.84.2


Approvals
(according to type):




Screw terminal (Box clamp) socket panel or 35 mm (EN 60715) rail mount	94.84.2	94.84.20
	Blue	Black
For timer type	85.02, 85.04	
Accessories		
Metal retaining clip (supplied with socket - packaging code SMA)	094.81	
6-way jumper link	094.06	094.06.0
Identification tag	094.80.3	
Technical data		
Rated values	10 A - 250 V	
Dielectric strength	2 kV AC	
Protection category	IP 20	
Ambient temperature	°C -40...+70	
 Screw torque	Nm	0.5
Wire strip length	mm	7
Max. wire size for 94.84.2 socket	solid wire	stranded wire
	mm²	1 x 6 / 2 x 2.5
	AWG	1 x 10 / 2 x 14

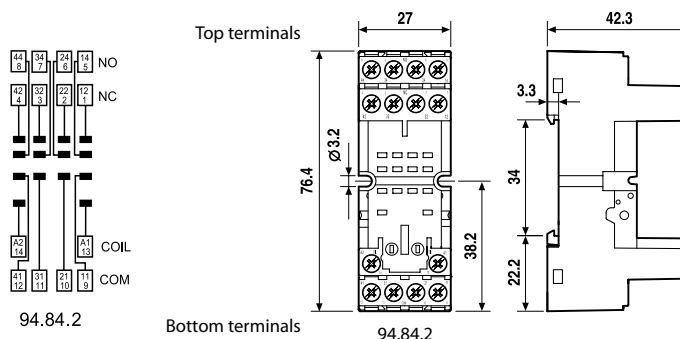

6-way jumper link for 94.84.2 socket	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	



094.06







94.94.3

Approvals
(according to type):




Screw terminal (Box clamp) socket panel or 35 mm rail mount	94.92.3 (blue)	94.92.30 (black)	94.94.3 (blue)	94.94.30 (black)
For timer type	85.02		85.04	
Accessories				
Metal retaining clip	094.81			
6-way jumper link	094.06	094.06.0	094.06	094.06.0
Identification tag	094.80.3			
Technical data				
Rated values	10 A - 250 V			
Dielectric strength	2 kV AC			
Protection category	IP 20			
Ambient temperature	°C	−25...+70		
 Screw torque	Nm	0.5		
Wire strip length	mm	8		
Max. wire size for 94.92.3 and 94.94.3 sockets		solid wire		stranded wire
	mm²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14

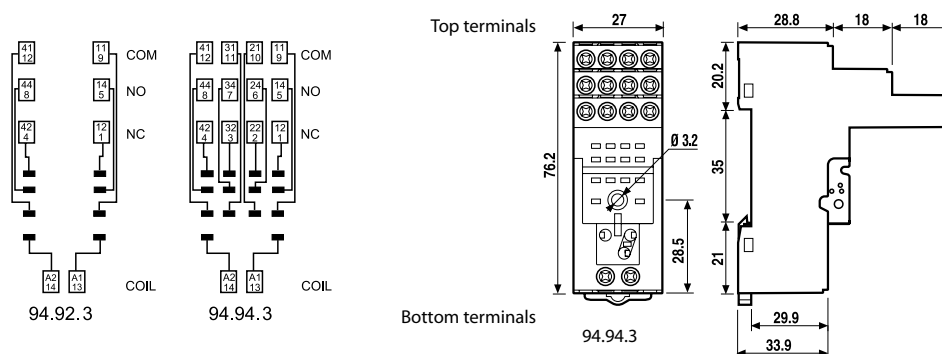

094.06



6-way jumper link for 94.92.3 and 94.94.3 sockets	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	





94.74

Approvals
(according to type):



94.82

Approvals
(according to type):



Screw terminal (Plate clamp) socket panel or 35 mm rail (EN 60715) mount	94.72 Blue	94.72.0 Black	94.73 Blue	94.73.0 Black	94.74 Blue	94.74.0 Black
For timer type	85.02		85.03		85.02, 85.04	
Accessories						
Metal retaining clip (supplied with timer)	094.81					
Screw terminal socket panel or 35 mm rail (EN 60715) mount	94.82 Blue			94.82.0 Black		
For timer type	85.02			85.02		
Accessories						
Metal retaining clip (supplied with timer)	094.81					
Technical data						
Rated values	10 A - 250 V					
Dielectric strength	2 kV AC					
Protection category	IP 20					
Ambient temperature	°C	-40...+70				
 Screw torque	Nm	0.5				
Wire strip length	mm	8 (94.72, 94.73, 94.74)			9 (94.82)	
Max. wire size for 94.72, 94.73, 94.74 and 94.82 sockets		solid wire			stranded wire	
	mm²	1 x 2.5 / 2 x 1.5			1 x 2.5 / 2 x 1.5	
	AWG	1 x 14 / 2 x 16			1 x 14 / 2 x 16	

