


Ground terminal blocks electrically connected to the mounting rail


Compression clamp

1 2 DIN 1 - 3

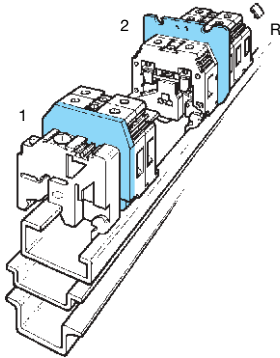

M 4/6.4A.P

Spacing 6 mm + 0,05 .238"



Type Part number

Green-yellow - UL 94 V0

M 4/6.4A.P.V0 0195 638.23

Terminal block for ground wire, same size as M 4/6.4A terminal block.

IEC	UL	CSA
NFC-DIN		
Wire size	0,2-4 mm ²	22-10 AWG
Short circuit current	480A/1s	12 AWG max.
Rated wire size / Gauge	4 mm ² /A4	10 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4,4-7 lb.in	

Approvals

Accessories

1 End section yellow


2 Separator end section yellow

On rail : Recomm.screwdriver/Recomm.torque

R See markers marking method

D 4/6.P.T1

Spacing 6 mm + 0,05 .238"



Type Part number

Green-yellow - UL 94 V0

D 4/6.P.T1 0199 220.00

DIN 3 only

Terminal block for ground wire, same size as D 4/6.T... terminal block.

IEC	UL	CSA
NFC-DIN		
Wire size	0,2-4 mm ²	24-10 AWG
Short circuit current	480A/1s	10 AWG
Rated wire size / Gauge	4 mm ² /A4	10 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4,4-7 lb.in	IP 20 NEMA 1

Approvals


Accessories

closed block

RC65 (5)

M 6/8.P

Spacing 8 mm - 0,05 .315"



Type Part number

Green-yellow

M 6/8.P 0165 114.17

M 6/8.P.V0 0195 114.06

Terminal block for ground wire, same size as M 6/8 terminal block.

IEC	UL	CSA
NFC-DIN		
Wire size	0,5-10 mm ²	24-8 AWG
Short circuit current	720A/1s	24-8 AWG
Rated wire size / Gauge	6 mm ² /A5	8 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	12 mm .47"	4-5 mm .16" - .20"	0,8-1 Nm 7,1-8,9 lb.in	

Approvals

Accessories

FEM6 th. 2,8 mm 0103 062.21

FEM6 V0 th. 2,8 mm 0199 305.02


SCF6 th. 3 mm 0118 707.03

4 mm .16" / 0,8 Nm 7.0 lb.in

Ground terminal blocks electrically connected to the mounting rail


Compression clamp

1 2 DIN 1 - 3

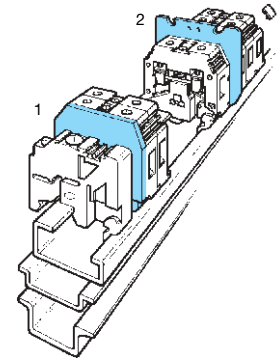

M 10/10.P

Spacing 10 mm - 0,05 .394"



Type Part number

Green-yellow

M 10/10.P 0165 115.10

M 10/10.P.V0 0195 115.07

Terminal block for ground wire, same size as M 10/10 terminal block.

IEC	UL	CSA
NFC-DIN		
Wire size	0,5-16 mm ²	22-6 AWG
Short circuit current	1200A/1s	22-6 AWG
Rated wire size / Gauge	10 mm ² /B6	6 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	12 mm .47"	5,5-6 mm .22" - .24"	1,2-1,4 Nm 10,6-12,3 lb.in	

Approvals

Accessories

1 End section yellow


2 Separator end section grey

On rail : Recomm.screwdriver/Recomm.torque

R See markers marking method

M 16/12.P

Spacing 12 mm - 0.1 .473"



Type Part number

Green-yellow

M 16/12.P 0165 130.23

M 16/12.P.V0 0195 130.12

Terminal block for ground wire, same size as M 16/12 terminal block.

IEC	UL	CSA
NFC-DIN		
Wire size	4-25 mm ²	18-4 AWG
Short circuit current	1920A/1s	18-4 AWG
Rated wire size / Gauge	16 mm ² /B7	4 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	14 mm .55"	5,5 mm .22"	1,2-1,4 Nm 10,6-12,3 lb.in	

Approvals

Accessories

closed block


SCFM6 th. 3 mm 0114 825.05

5,5 mm .22" / 1,0 Nm 9.0 lb.in

(12) (17) (26)

M 35/16.P

Spacing 16 mm - 0.1 .630"



Type Part number

Green-yellow

M 35/16.P 0165 111.14

M 35/16.P.V0 0195 111.03

Terminal block for ground wire, same size as M 35/16 terminal block

IEC	UL	CSA
NFC-DIN		
Wire size	4-50 mm ²	10-0 AWG
Short circuit current	4200A/1s	10-0 AWG
Rated wire size / Gauge	35 mm ² /B9	0 AWG

Other characteristics	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
	17 mm .67"	8 mm .32"	2,8-3 Nm 24,3-26,1 lb.in	

Approvals

Accessories

closed block

SCFM6 th. 3 mm 0114 825.05

5,5 mm .22" / 1,0 Nm 9.0 lb.in

(13) (17) (26)