


M 300/42.FF

Spacing 42 mm (1.65")

END OF SERIES

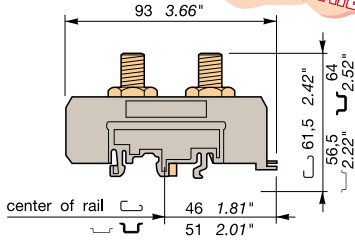


2 studs M10 linked by
1 removable bar 31,5 x 5 mm

M 35/26.AF

Spacing 26 mm (1.02")

END OF SERIES




1 stud M6
1 wire-clamp with HM6 screw

M 70/31.AF

Spacing 31 mm (1.22")

END OF SERIES



1 stud M8
1 wire-clamp with HM8 screw



Color	Type	Part numbers
Grey	M 300/42.FF	1SNA 115 149 R2000
Beige V0	M 300/42.FF.V0	1SNA 195 149 R2100

FEC: 4278215

Characteristics

Wire size	Wire size			
	DIN	NFC	UL	CSA
Lug	6-150 mm ²	50-150 mm ²	1/0-500 MCM	500 MCM max.
Bar	32 x 8 mm		1.26" x .32"	
Wire-clamp				
Voltage	Voltage		Voltage	
	IEC	IEC		
V~ Without partition	1000	1000	600	600
V~ With partition	1000	1000	600	600
Pulse	12 kV	12 kV		
Pollution degree	3	3		
Current	Current		Current	
	DIN	NFC		
Rated	265 A	269 A	230 A	550 A
Wire-size	Wire-size			
	Rated	95 mm ²	120 mm ²	500 MCM
Lug	Lug		Lug	
	Central bolt	Wire-clamp	Wire stripping length	
H 16 mm				
10 Nm 87 lb.in				

Type	Part numbers	
BAEH	th. 12 mm	1SNA 116 934 R0400
BADH	th. 12 mm	1SNA 116 900 R2700
BAMH	th. 9,1 mm	1SNA 114 836 R0000
ECP42		1SNA 113 692 R1700
CPP421	1 block	1SNA 168 208 R2100
CPP422	2 blocks	1SNA 168 207 R1000
CPP423	3 blocks	1SNA 163 424 R1400
CPU42		1SNA 116 515 R0000

⑮ for ECP ⑥ for CPU

Characteristics

Wire size	Wire size			
	DIN	NFC	UL	CSA
Lug	2,5-50 mm ²	4-35 mm ²	10-2 AWG	4 AWG max.
Bar	16 x 4 mm		.63" x .16"	
Wire-clamp	6-50 mm ²	6-50 mm ²	14-2 AWG	10-4 AWG
Voltage	Voltage		Voltage	
	IEC	IEC		
V~ Without partition	1000-1200	1000	600	600
V~ With partition	1000-1200	1000	600	600
Pulse	8 kV	8 kV		
Pollution degree	3	3		
Current	Current		Current	
	DIN	NFC		
Rated	115 A	101 A	115 A	125 A
Wire-size	Wire-size			
	Rated	25 mm ²	25 mm ²	2 AWG
Lug	Lug		Lug	
	Central bolt	Wire-clamp	Wire stripping length	
H 10 mm		H 10 mm	19 mm .75"	
4,5 Nm 39 lb.in		4,5 Nm 39 lb.in		

Type	Part numbers	
BAEH	th. 12 mm	1SNA 116 934 R0400
BADH	th. 12 mm	1SNA 116 900 R2700
BAMH	th. 9,1 mm	1SNA 114 836 R0000
ECP26		1SNA 113 689 R2400
CPP261	1 block	1SNA 168 202 R1300
CPP262	2 blocks	1SNA 168 201 R1200
CPP263	3 blocks	1SNA 163 403 R2000
CPU26		1SNA 114 882 R0700

⑮ for ECP and wire-clamp ⑥ for CPU

Characteristics

Wire size	Wire size			
	DIN	NFC	UL	CSA
Lug	2,5-70 mm ²	6-70 mm ²	8-0 AWG	6-0 AWG
Bar	20 x 5 mm		.78" x .20"	
Wire-clamp	6-70 mm ²	6-70 mm ²	8-0 AWG	6-0 AWG
Voltage	Voltage		Voltage	
	IEC	IEC		
V~ Without partition	1000-1200	1000	600	600
V~ With partition	1000-1200	1000	600	600
Pulse	8 kV	8 kV		
Pollution degree	3	3		
Current	Current		Current	
	DIN	NFC		
Rated	178 A	150 A	150 A	200 A
Wire-size	Wire-size			
	Rated	50 mm ²	50 mm ²	1/0 AWG
Lug	Lug		Lug	
	Central bolt	Wire-clamp	Wire stripping length	
H 13 mm		H 13 mm	22 mm .87"	
6 Nm 52 lb.in		6 Nm 52 lb.in		

Type	Part numbers	
BAEH	th. 12 mm	1SNA 116 934 R0400
BADH	th. 12 mm	1SNA 116 900 R2700
BAMH	th. 9,1 mm	1SNA 114 836 R0000
ECP31		1SNA 113 690 R2100
CPP311	1 block	1SNA 168 204 R1500
CPP312	2 blocks	1SNA 168 203 R1400
CPP313	3 blocks	1SNA 163 409 R0600
CPU31		1SNA 114 996 R0100

⑮ for ECP and wire-clamp ⑥ for CPU