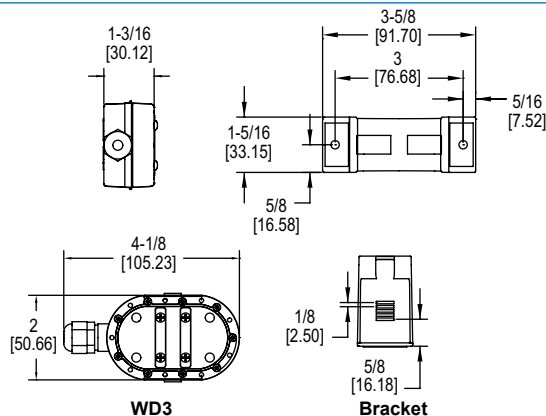


**Dwyer****SERIES WD3**

# WATER LEAK DETECTORS

Battery or External Powered, SPST or DPDT Relays

**WD3-BP****WD3-LP****Bracket****WD3****Bracket**

The **Series WD3 Water Leak Detectors** protect equipment from water damage by detecting the presence of water. Model WD3-BP-D1-A is battery powered, all others require AC or DC supply voltages.

**BENEFITS/FEATURES**

- Audible and visual alerts provide local indication of the alarm condition and internal switch will give remote indication or control to prevent further buildup of water
- Sensing height can be adjusted as low as 1/32" (0.79 mm) using the included adjustable mounting bracket
- Mounting bracket can attach to any flat surface by either using the attached adhesive strips or mounting screws for easy installation

**APPLICATIONS**

- AHU drip pans
- Radiant floors
- Data centers
- Sump pumps
- Drains

**MODEL CHART**

| Model              | Output      | Power                      | Audible Alarm |
|--------------------|-------------|----------------------------|---------------|
| <b>WD3-BP-D1-A</b> | SPST NO SSR | Battery                    | Yes           |
| <b>WD3-LP-D2</b>   | DPDT relay  | 24 VAC (±10%) or 11-27 VDC | No            |
| <b>WD3-LP-D2-A</b> | DPDT relay  | 24 VAC (±10%) or 11-27 VDC | Yes           |

**ACCESSORIES**

| Model            | Description                  |
|------------------|------------------------------|
| <b>A-WD3-BRK</b> | Replacement mounting bracket |

**SPECIFICATIONS**

**Service:** Water or conductive fluids.

**Minimum Sensing Gap:** 1/32".

**Switch Type:** Battery powered model: SPST NO SSR; External powered models: DPDT relay.

**Electrical Ratings:** Battery powered model: Pilot duty rating 250 mA @ 24 VDC; External powered models: 1 A @ 24 VAC/DC.

**Audible Alarm:** At least 85 dB @ 1" distance (depends on model).

**Visual Alarm:** Red LED for water level; Yellow LED for low battery (battery powered model only); Green LED for power condition (external powered models only).

**Temperature Limits:** 32 to 122°F (0 to 50°C).

**Power Requirements:** Battery powered model: 3V CR2450 lithium metal battery, installed functional, user replaceable; External powered models: 24 VAC (±10%) or 11-27 VDC.

**Power Consumption:** Battery powered model: 0.9 mA steady state / 3.0 mA during alarm condition; External powered models: 30 mA steady state / 85 mA during alarm condition.

**Battery Life:** 5 years steady state / 48 hours during alarm condition.

**Electrical Connections:** 4.9' (1.5 m), 22 AWG, PVC, UL plenum rated cable.

**Enclosure Material:** ABS and polycarbonate with flammability classification UL 94 V-0.

**Enclosure Rating:** Audible alarm models: Watertight up to 3/4 of the body height; Non-audible alarm models: NEMA 6P (IP 68) submersible.

**Weight:** 4.85 oz (137.5 g).

**Compliance:** CE.

