


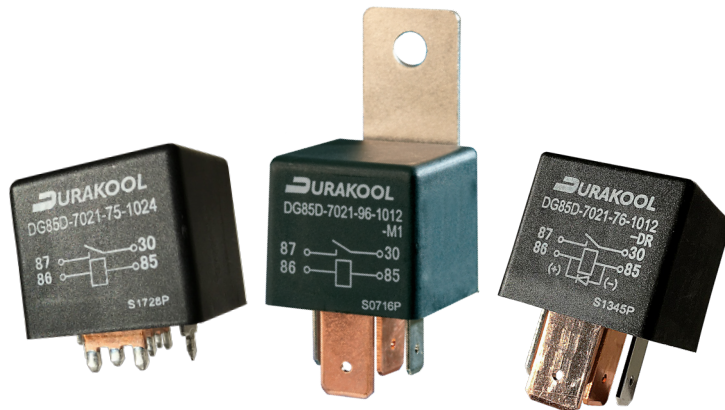

- High continuous DC current capacity - 100A
- General purpose automotive or industrial relays
- High inrush capabilities
- PCB Mounting option
- Ideal for DC Motor Control
- Industry standard size and footprint

RoHS
Compliant ✓

Contacts

Contact arrangement	SPST-NO (1 Form A)
Contact material	AgSnOInO
Max. switching voltage	DC 30VDC (current dependent - see fig.3)
Max. continuous current	100A
Max. switching current ³	make 240A
Max. switching current	break 100A
Min. switching current	0.1A 12VDC
Contact gap	>0.5mm
Initial resistance	<100mΩ, max. at 0.1A/6VDC

Coil

Nominal voltage	DC 6...24V
Must release voltage	≥0.1Un
Operating range of supply voltage	See table 1
Rated power consumption	DC 1.6W; 1.81W with resistor

Insulation

Insulation resistance	100MΩ at 500VDC, 50%RH
Dielectric strength	coil to contact 500Vrms, 1min
	open contacts 500Vrms, 1min

General Data

Operating time	typ. 7ms
Release time	typ. 2ms
Electrical life ²	ops. 1 x 10 ⁵
Mechanical life	ops. 1 x 10 ⁷

Environmental

Ambient temperature	operating	-40 to 125°C (Above 85°C - consult factory)
	storage	-40 to +155°C
Shock resistance	functional	20g, 11ms
	destructive	100g
Vibration resistance		DA1.27mm 10-40Hz / 40-70Hz: 5g
		DA0.5mm 100-500Hz: 10g
Dimensions	L x W x H	28.3 x 28.3 x 25.0 mm (excluding terminals)
Weight	approx.	40g depending on mounting

Ordering Code

D G 8 5 D - 7 0 2 1 - 9 6 - 1 0 1 2 - M 1 D R

Series

Contact material

70: AgSnOInO

Contact arrangement

21: SPST-NO (1 N/O, 1 Form A)

Environmental protection

3: In cover, sealed (IP67)

7: In cover, dust cover (IP54)

9: Cover with mounting bracket. (integral plastic, unless optional metal bracket selected), (IP54)

Connection mode

5: for PCB

6: Flat blades

Mounting & terminations

Blank: No options

M1: Metal bracket

M2: Bent metal bracket

S1: Skirted cover & metal bracket

S2: Skirted cover & bent metal bracket

Parallel component options

Blank: No option

R: Integral resistor

D: Integral diode +85/-86

DR: Integral diode reversed -85/+86 - standard

Order code examples

DG85D-7021-75-1012 = unsealed, pcb, no bracket

DG85D-7021-76-1012 = unsealed, no bracket (standard)

DG85D-7021-36-1012 = sealed, no bracket

DG85D-7021-36-1012-M1 = sealed, metal bracket

DG85D-7021-96-1012 = unsealed, plastic bracket

DG85D-7021-96-1012-M1 = unsealed, metal bracket

Coil Data



Table 1

Coil code	Nominal voltage (VDC)	Coil resistance Ω $\pm 10\%$	Must operate voltage max. (VDC)	Max. allowable voltage (VDC)*	Must release voltage min. (VDC)
1006	6	22	3.6	10.1	0.6
1012	12	90	7.2	20.5	1.2
1024	24	330	14.4	39.1	2.4

* At ambient temperature of 85°C and above, up to maximum ambient temperature of 125°C, maximum allowable voltage should be reduced by 28%.



Dimensions mm

Fig. 1

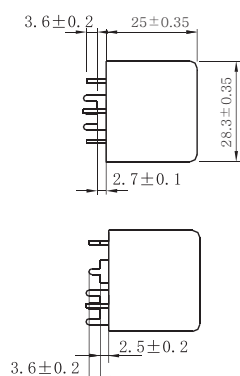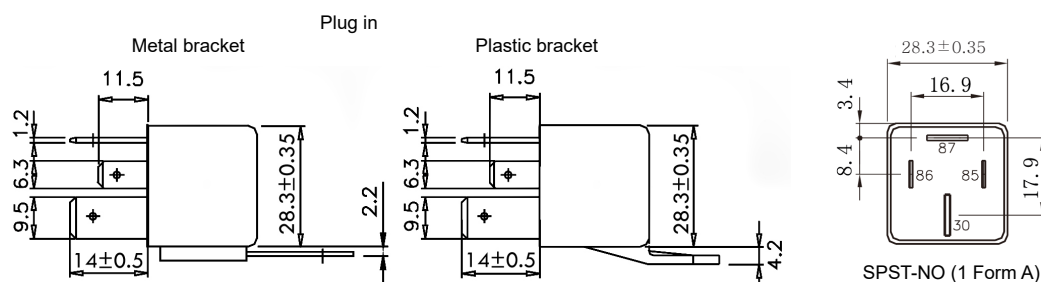


PCB mount including suggested hole dimensions

Bottom view




Plug in with optional brackets and skirts

9 - Molded Bracket

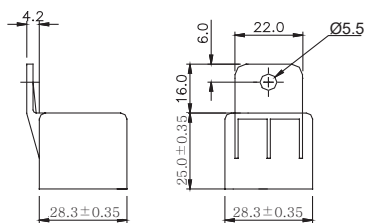


9S1 - Skirted Cover + Metal Bracket
9S2 - Skirted Cover + Bent Metal Bracket

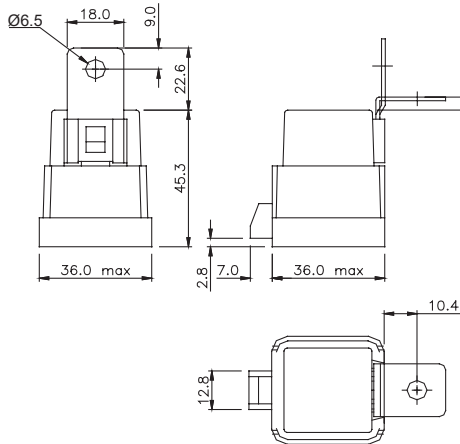

9M1 - Metal Bracket


9M2 - Bent Metal Bracket

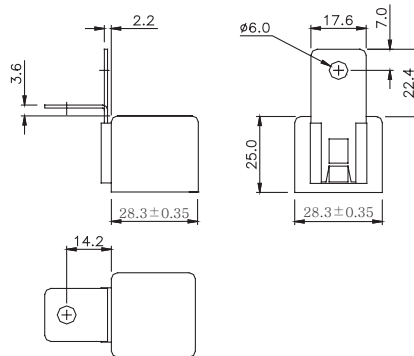

Tolerance for bracket dimensions = $\pm 0.2\text{mm}$


Wiring Diagrams

Fig. 2

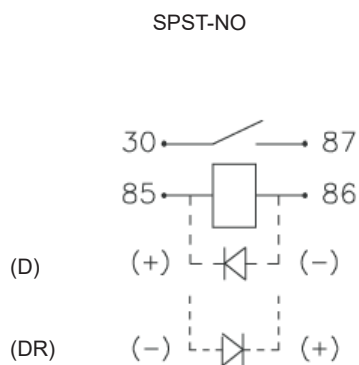

Max. DC resistive load breaking capacity

Fig. 3

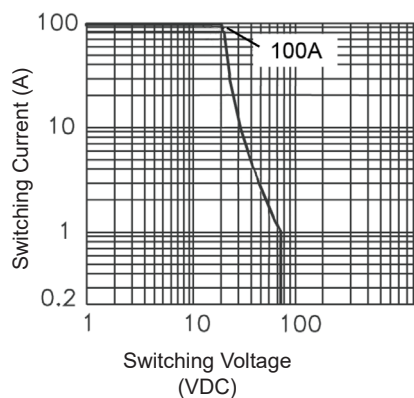

Notes:

- 1: All parameters, unless otherwise specified, are measured at ambient temperature of 23°C.
- 2: Electrical life obtained at resistive or inductive load at 100A, 15VDC with suitable arc suppression circuit attached and with operating frequency of 1 op/sec.
- 3: Maximum make current refers to lamp load inrush current.