


NAC/NAM/NAH/NAP series (40,50,60A)

NAC -50 -472 -

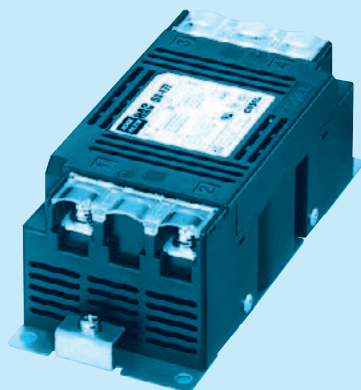

- ① **Series Name**
 ② **Rated Current**
 ③ **Line to ground capacitor code: Refer to table 1.1 and table 1.2.**
 ④ **Option**
F: High input voltage (500VAC/600VDC)

table1.1 Line to ground capacitor code (Standard)

Code	N A C	N A M	N A H	N A P	Leakage Current (Input 125/250V 60Hz)	Line to ground capacitor (nominal value)
000		●	●	●	5 μ A/ 10 μ A max	Not Provided
471		●	●	●	50 μ A/ 100 μ A max	470pF
222	●		●	●	0.25 mA/ 0.5 mA max	2,200pF
472	●		●	●	0.5 mA/ 1.0 mA max	4,700pF
223	●		●	●	1.25 mA/ 2.5 mA max	0.022 μ F
683	●		●	●	1.75 mA/ 3.5 mA max	0.068 μ F
224	●			●	6.0 mA/ 12.0 mA max	0.22 μ F
155	●			●	27.5 mA/ 55.0 mA max	1.5 μ F

table1.2 Line to ground capacitor code (Option: F)

Code	N A C	N A M	N A H	N A P	Leakage Current (Input 250/500V 60Hz)	Line to ground capacitor (nominal value)
103	●	●	●	●	0.5 mA/ 1.0 mA max	0.01μF
223	●	●	●	●	1.0 mA/ 2.0 mA max	0.022μF
683	●	●	●	●	2.5 mA/ 5.0 mA max	0.068μF

* When the line to ground capacitor code is different, the attenuation characteristic is different.

Features of NAC/NAM/NAH/NAP series

- **Single Phase 277VAC/300VDC (1-stage filter)**
This product is available 277VAC equipment in factory switchboards and building equipment
- **Withstand voltage 4,000 VAC (Line to ground capacitor code -000 to -472)**

■ **NAC : High-attenuation type from 150kHz to 1MHz**

■ NAM : Low leakage current type

■ **NAH** : Ultra high-attenuation type from 9kHz to 1MHz

■ **NAP : Outside impulse high-attenuation type**

Specifications

No.	Items		NAC-40-472	NAC-50-472	NAC-60-472
			NAM-40-000	NAM-50-000	NAM-60-000
			NAH-40-472	NAH-50-472	NAH-60-472
			NAP-40-472	NAP-50-472	NAP-60-472
1	Rated Voltage	[VAC]	277 (voltage range : 305 max) 1 ϕ 50/60Hz [Option : F 500 (voltage range : 528 max) 1 ϕ 50/60Hz]		
		[VDC]	300 (voltage range:400 max) [Option : F 600]		
2	Rated Current[A]		40	50	60
3	Test Voltage (Terminal-Mounting Plate)		4,000 VAC (Cutoff Current = 25mA), 1minute at room temperature and humidity *1 *2		
4	Isolation Resistance (Terminal-Mounting Plate)		500 VDC 100M Ω min at room temperature and humidity *3		
5	Leakage current		Refer to table 1.1 and table 1.2		
6	DC resistance		10m Ω max	6.0m Ω max	4.5m Ω max
7	Safety agency approval temperatures		-25 to +85°C (Refer to Derating Curve)		
8	Operating temperature		-40 to +85°C (Refer to Derating Curve)		
9	Operating humidity		20 to 95%RH (Non condensing)		
10	Storage temperature/humidity		-40 to +85°C/20 to 95%RH (Non condensing)		
11	Vibration		10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis		
12	Impact		196.1m/s ² (20G), 11ms Once each X, Y and Z axis		
13	Safety agency approvals		UL60939 [Overvoltage Category : III Altitude:3000m], CSA C22.2 No.8 (C-UL) EN60939 (DEMKO) [Overvoltage Category: III Altitude:3000m] , IEC		
14	Case size (without projection) /Weight		65x54x153mm [2.56x2.13x6.02 inches] (WxHxD) / 750g max		


*1 "NA□-□□-□□□-F" : 2,500 VAC (Cutoff Current = 100mA) , 1 minute at room temperature and humidity.

*2 Capacitor code “223”, “683”, “224” and “155” of “NA□-□□-□□□□”: 2,800VDC (Cutoff Current = 10mA) , 1 minute at room temperature and humidity.


*3 Capacitor code “224” and “155”: isolation resistance specification is deleted.

Circuit Diagram


(1) Line to ground capacitor code :000,471,222,472,223

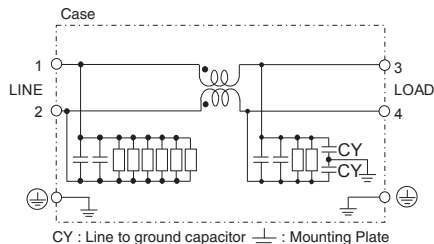


(2) Line to ground capacitor code :683

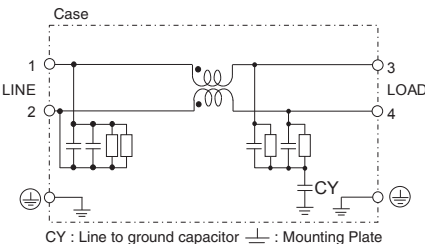


(3) Line to ground capacitor code :224,155

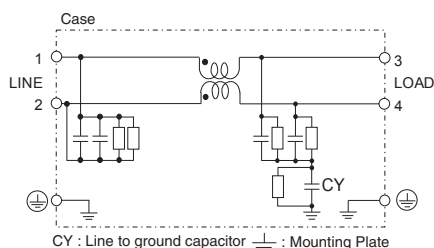


(4) Line to ground capacitor code :103,223,683
Option : F

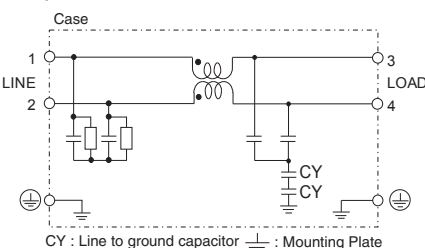

Derating Curve

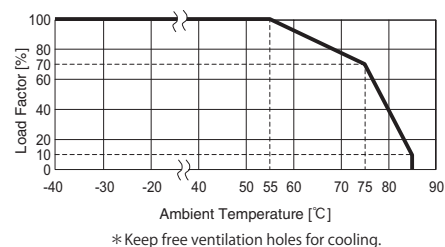

External view

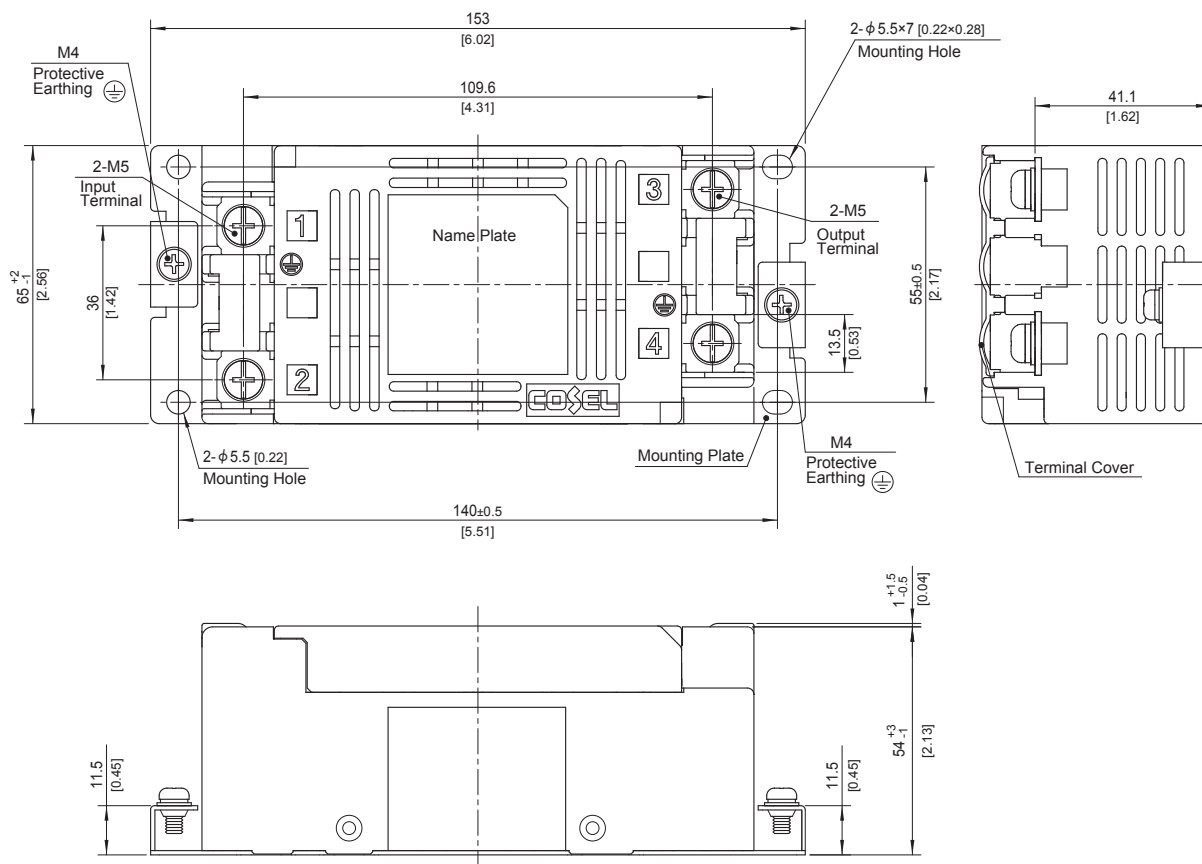

- ※ Dimensions in mm, []=inches
- ※ Tolerance: ± 1 [± 0.04]
- ※ Weight: 750g max
- ※ Mounting Plate: Hot-dip Galvanized Steel board t=1.0 [0.04]
- ※ Case Material: PBT
- ※ Terminal block screw tightening torque M5: 3.0N·m max
- ※ Protective Earthing (PE) screw tightening torque M4: 1.6N·m max
- ※ Can not be mounted upside-down. (mounted the top surface)
- ※ Keep free ventilation holes for cooling.
- ※ Can be mounted using the 2 corner mounting holes.