

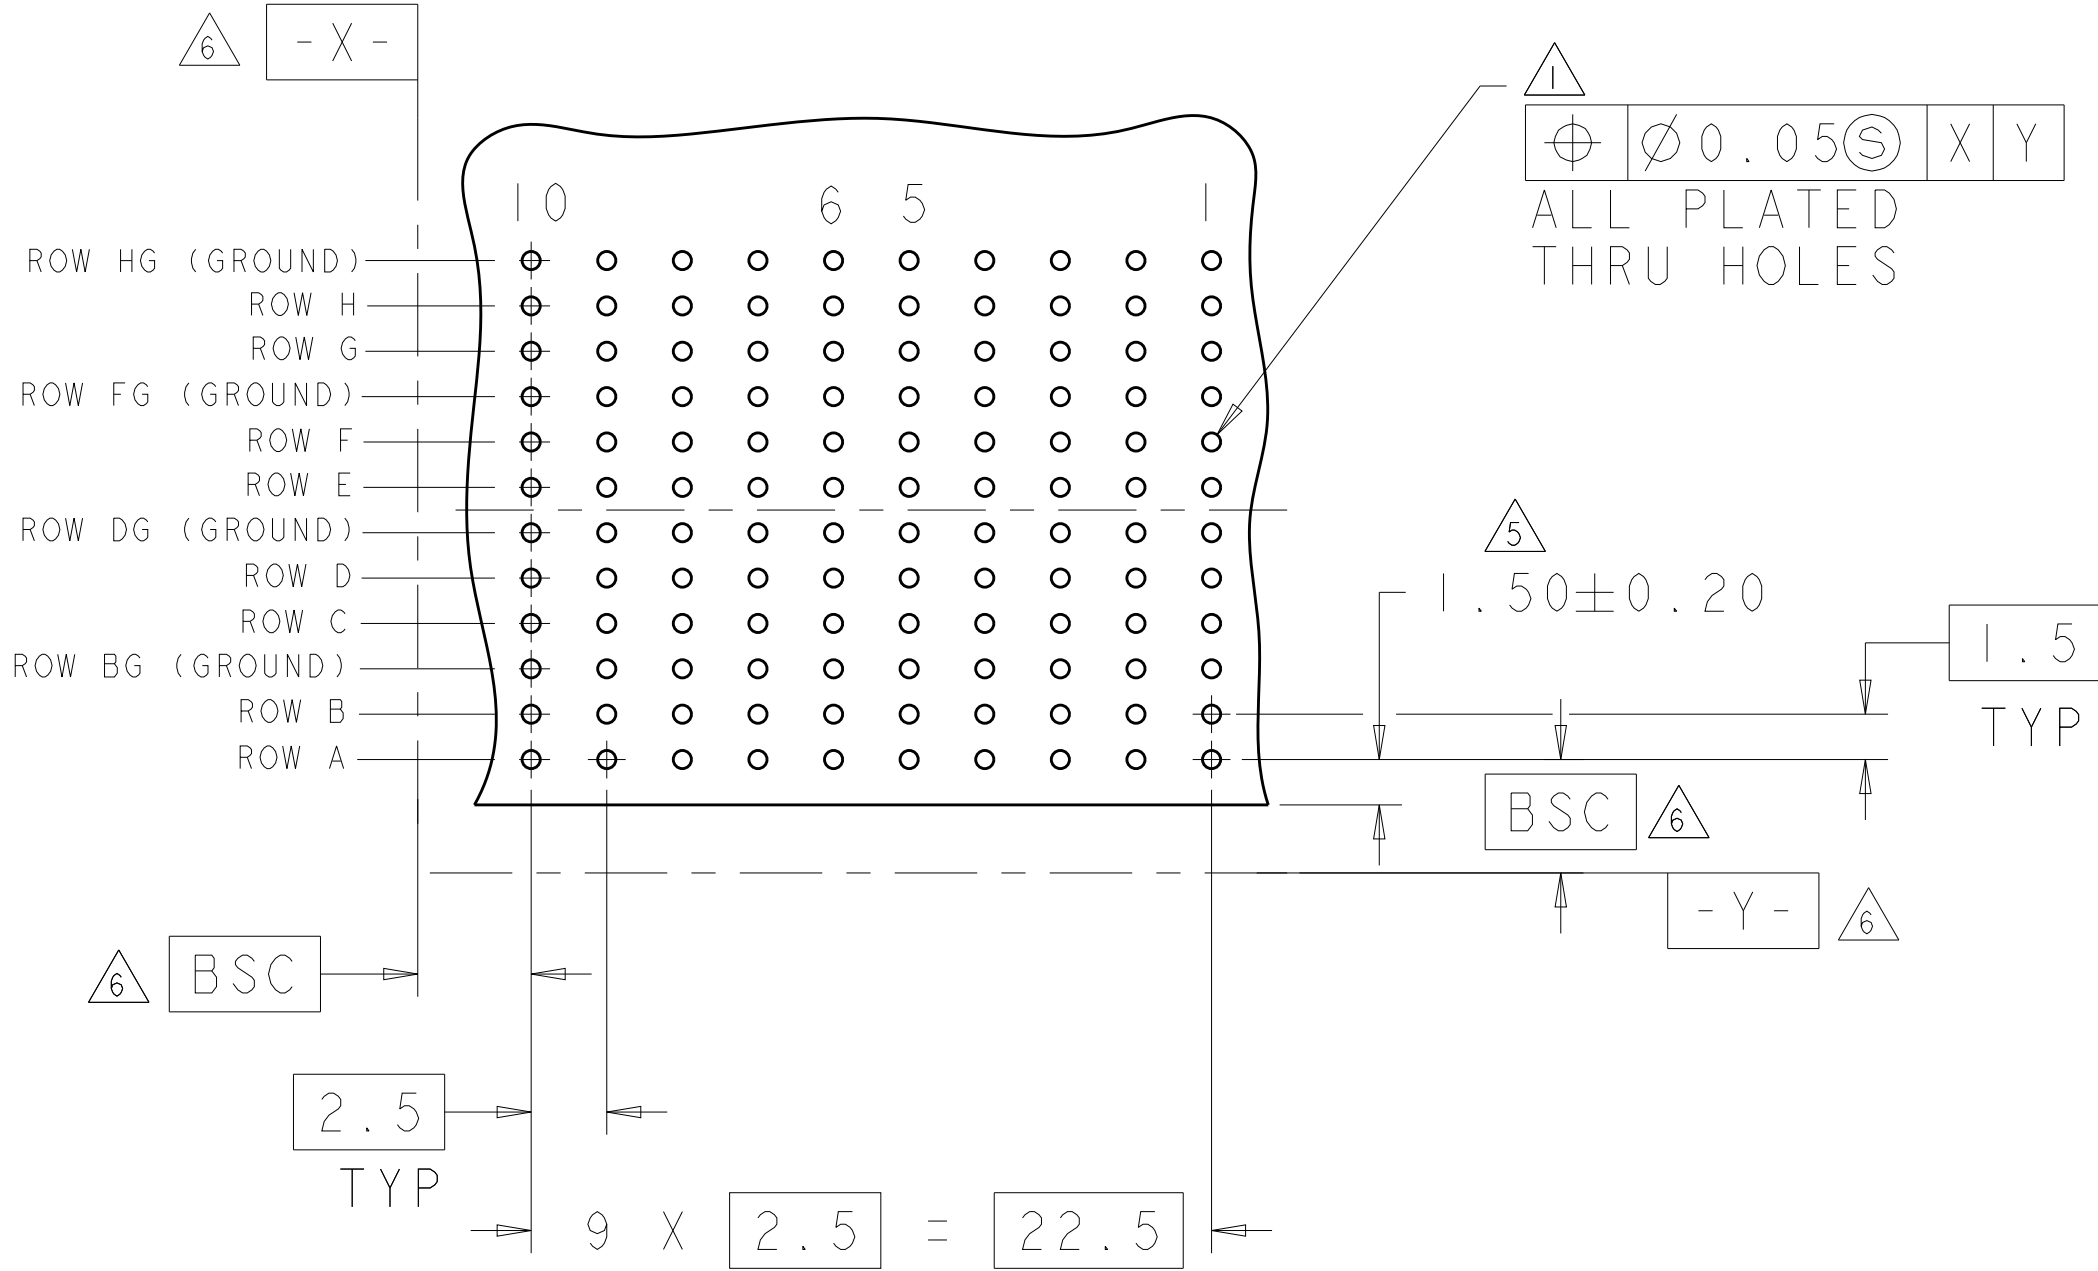
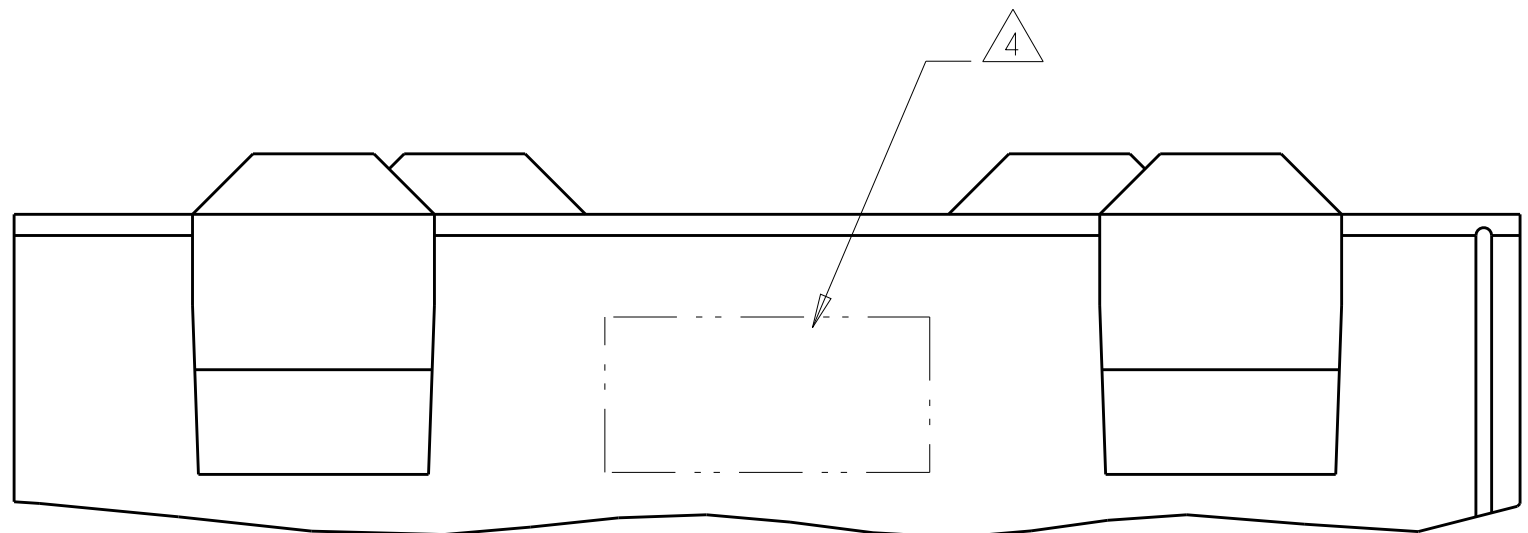


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
F		REVISED PER ECO-17-013036	13SEP2017	AP	RP
G		REVISED PER ECO-18-002354	03MAR2018	AP	RP
H		REVISED PER ECO-18-006922	08MAY2018	AP	RP

1. REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
2. MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-O RATED.
3. FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING
4. CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
5. DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
6. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

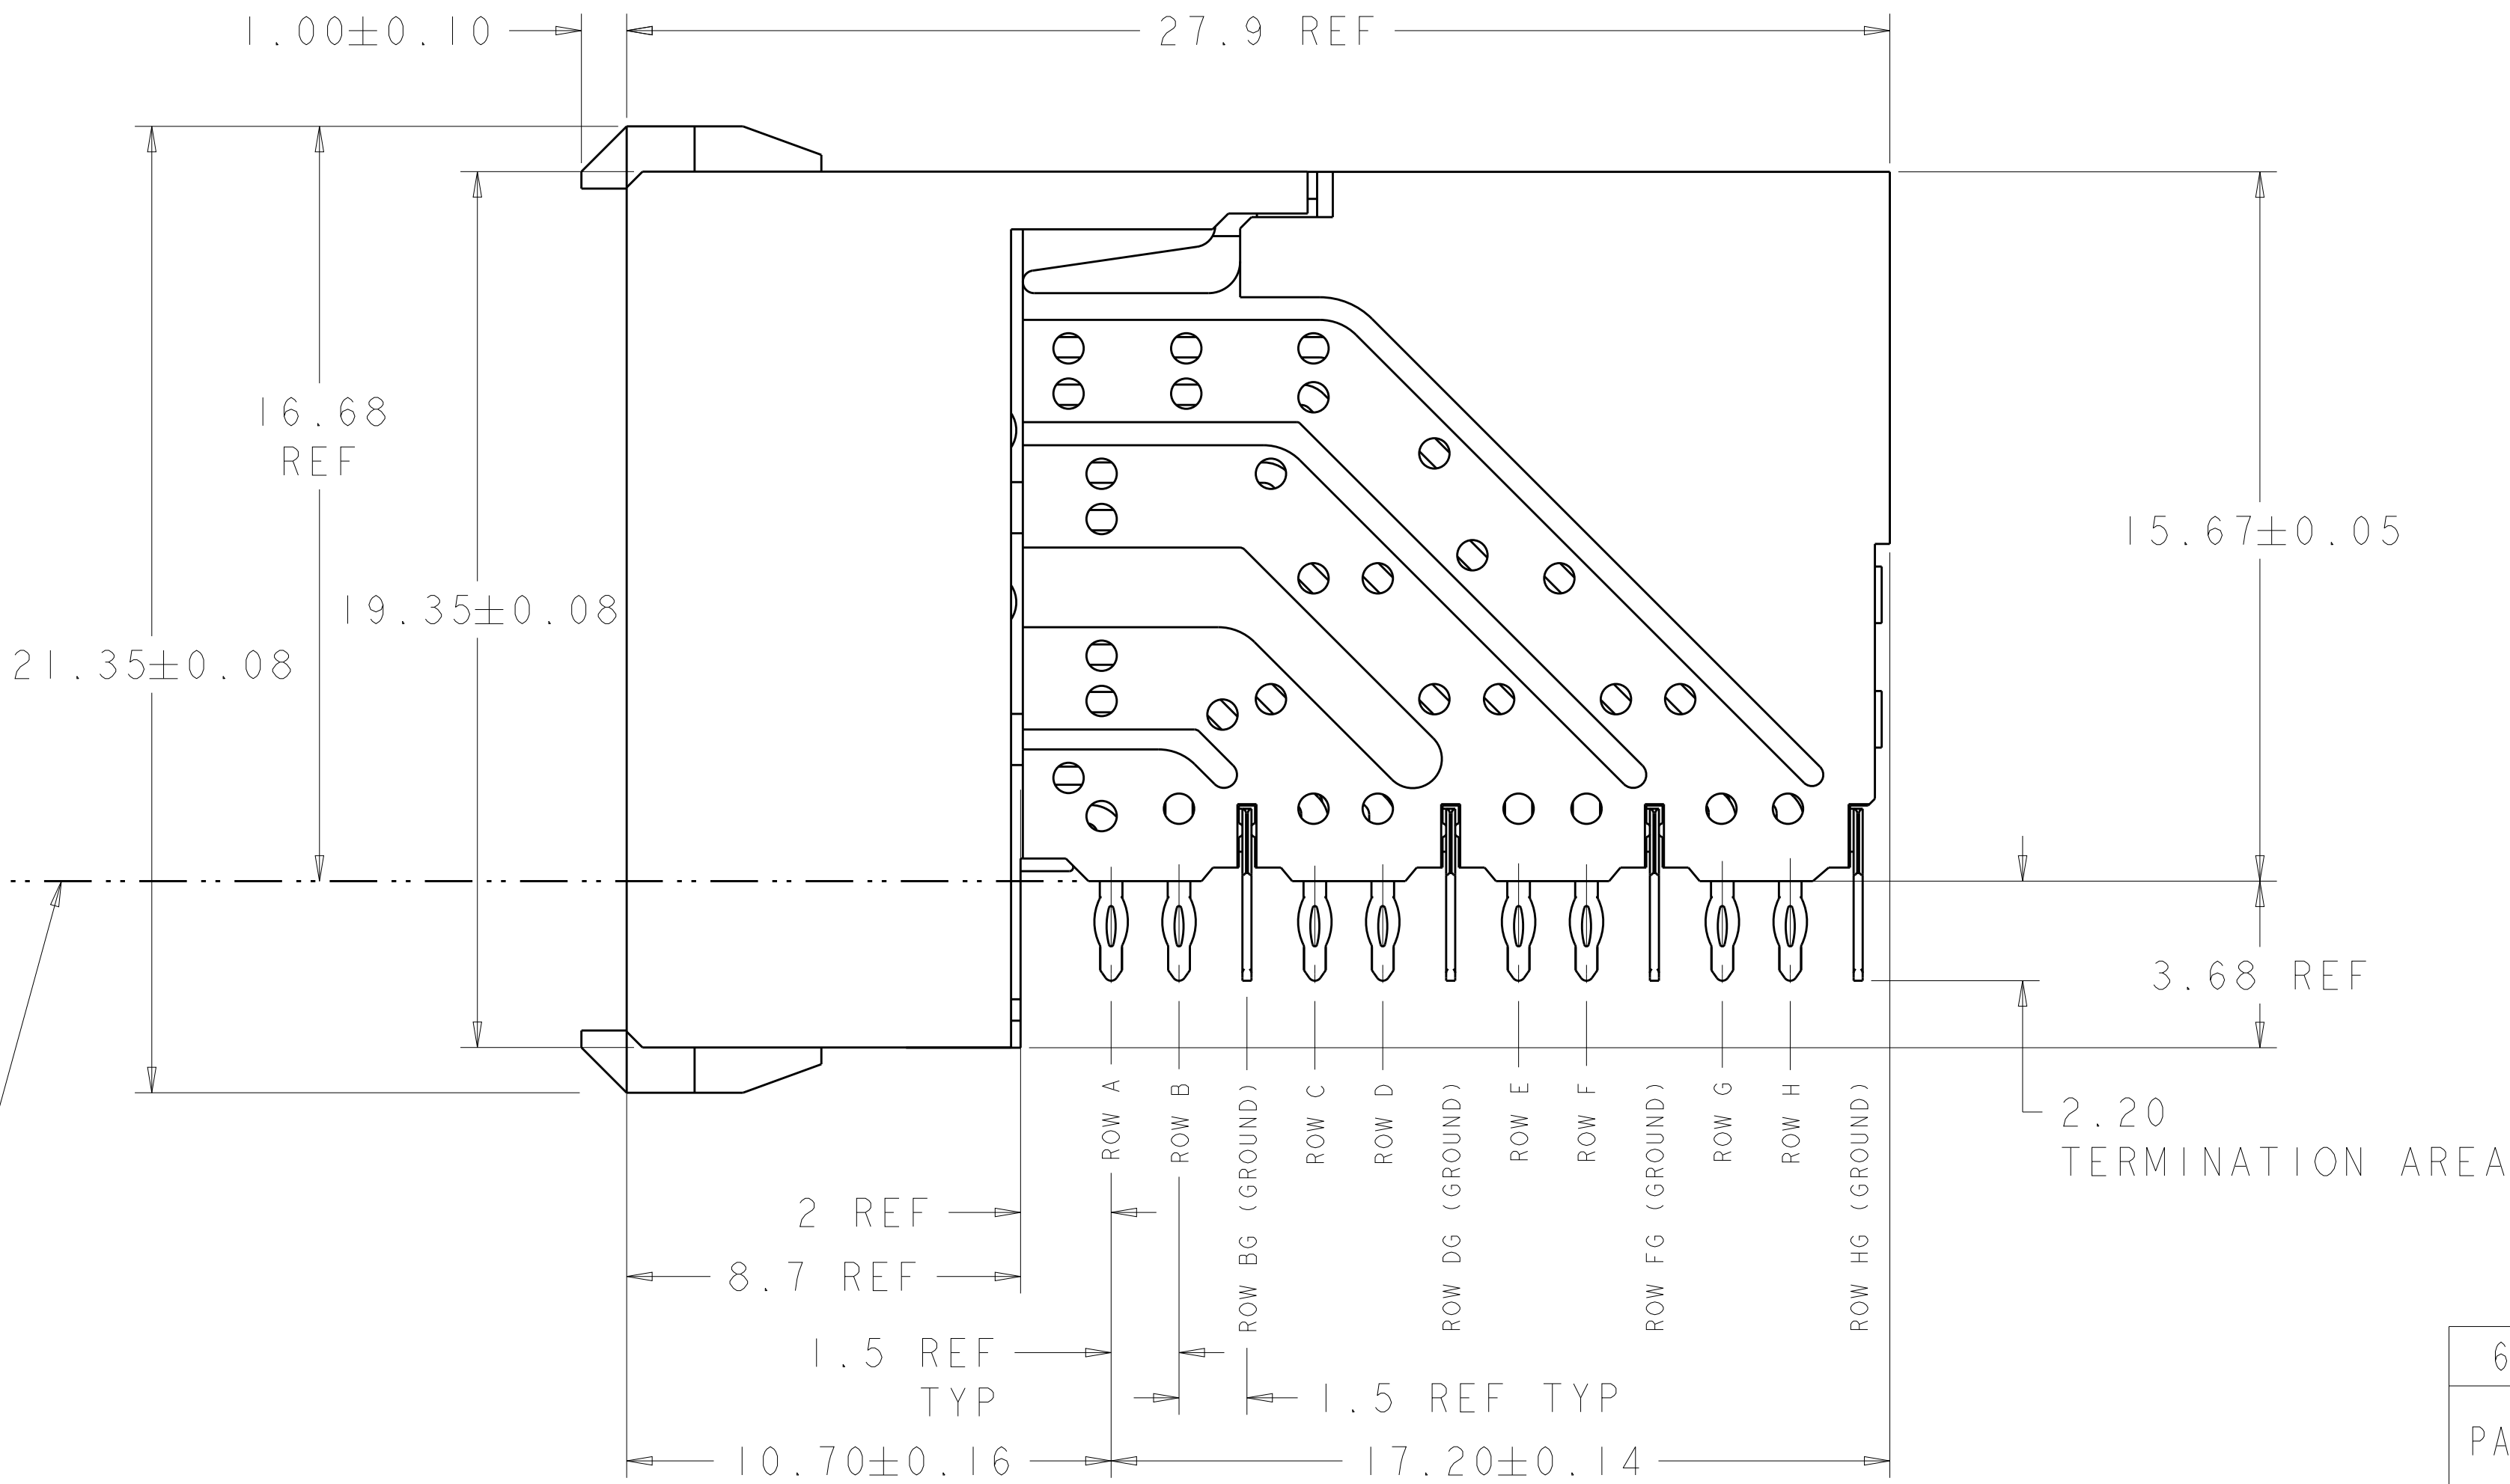

RECOMMENDED PC BOARD LAYOUT,
DAUGHTER BOARD,
COMPONENT SIDE SHOWN
SCALE 4:1

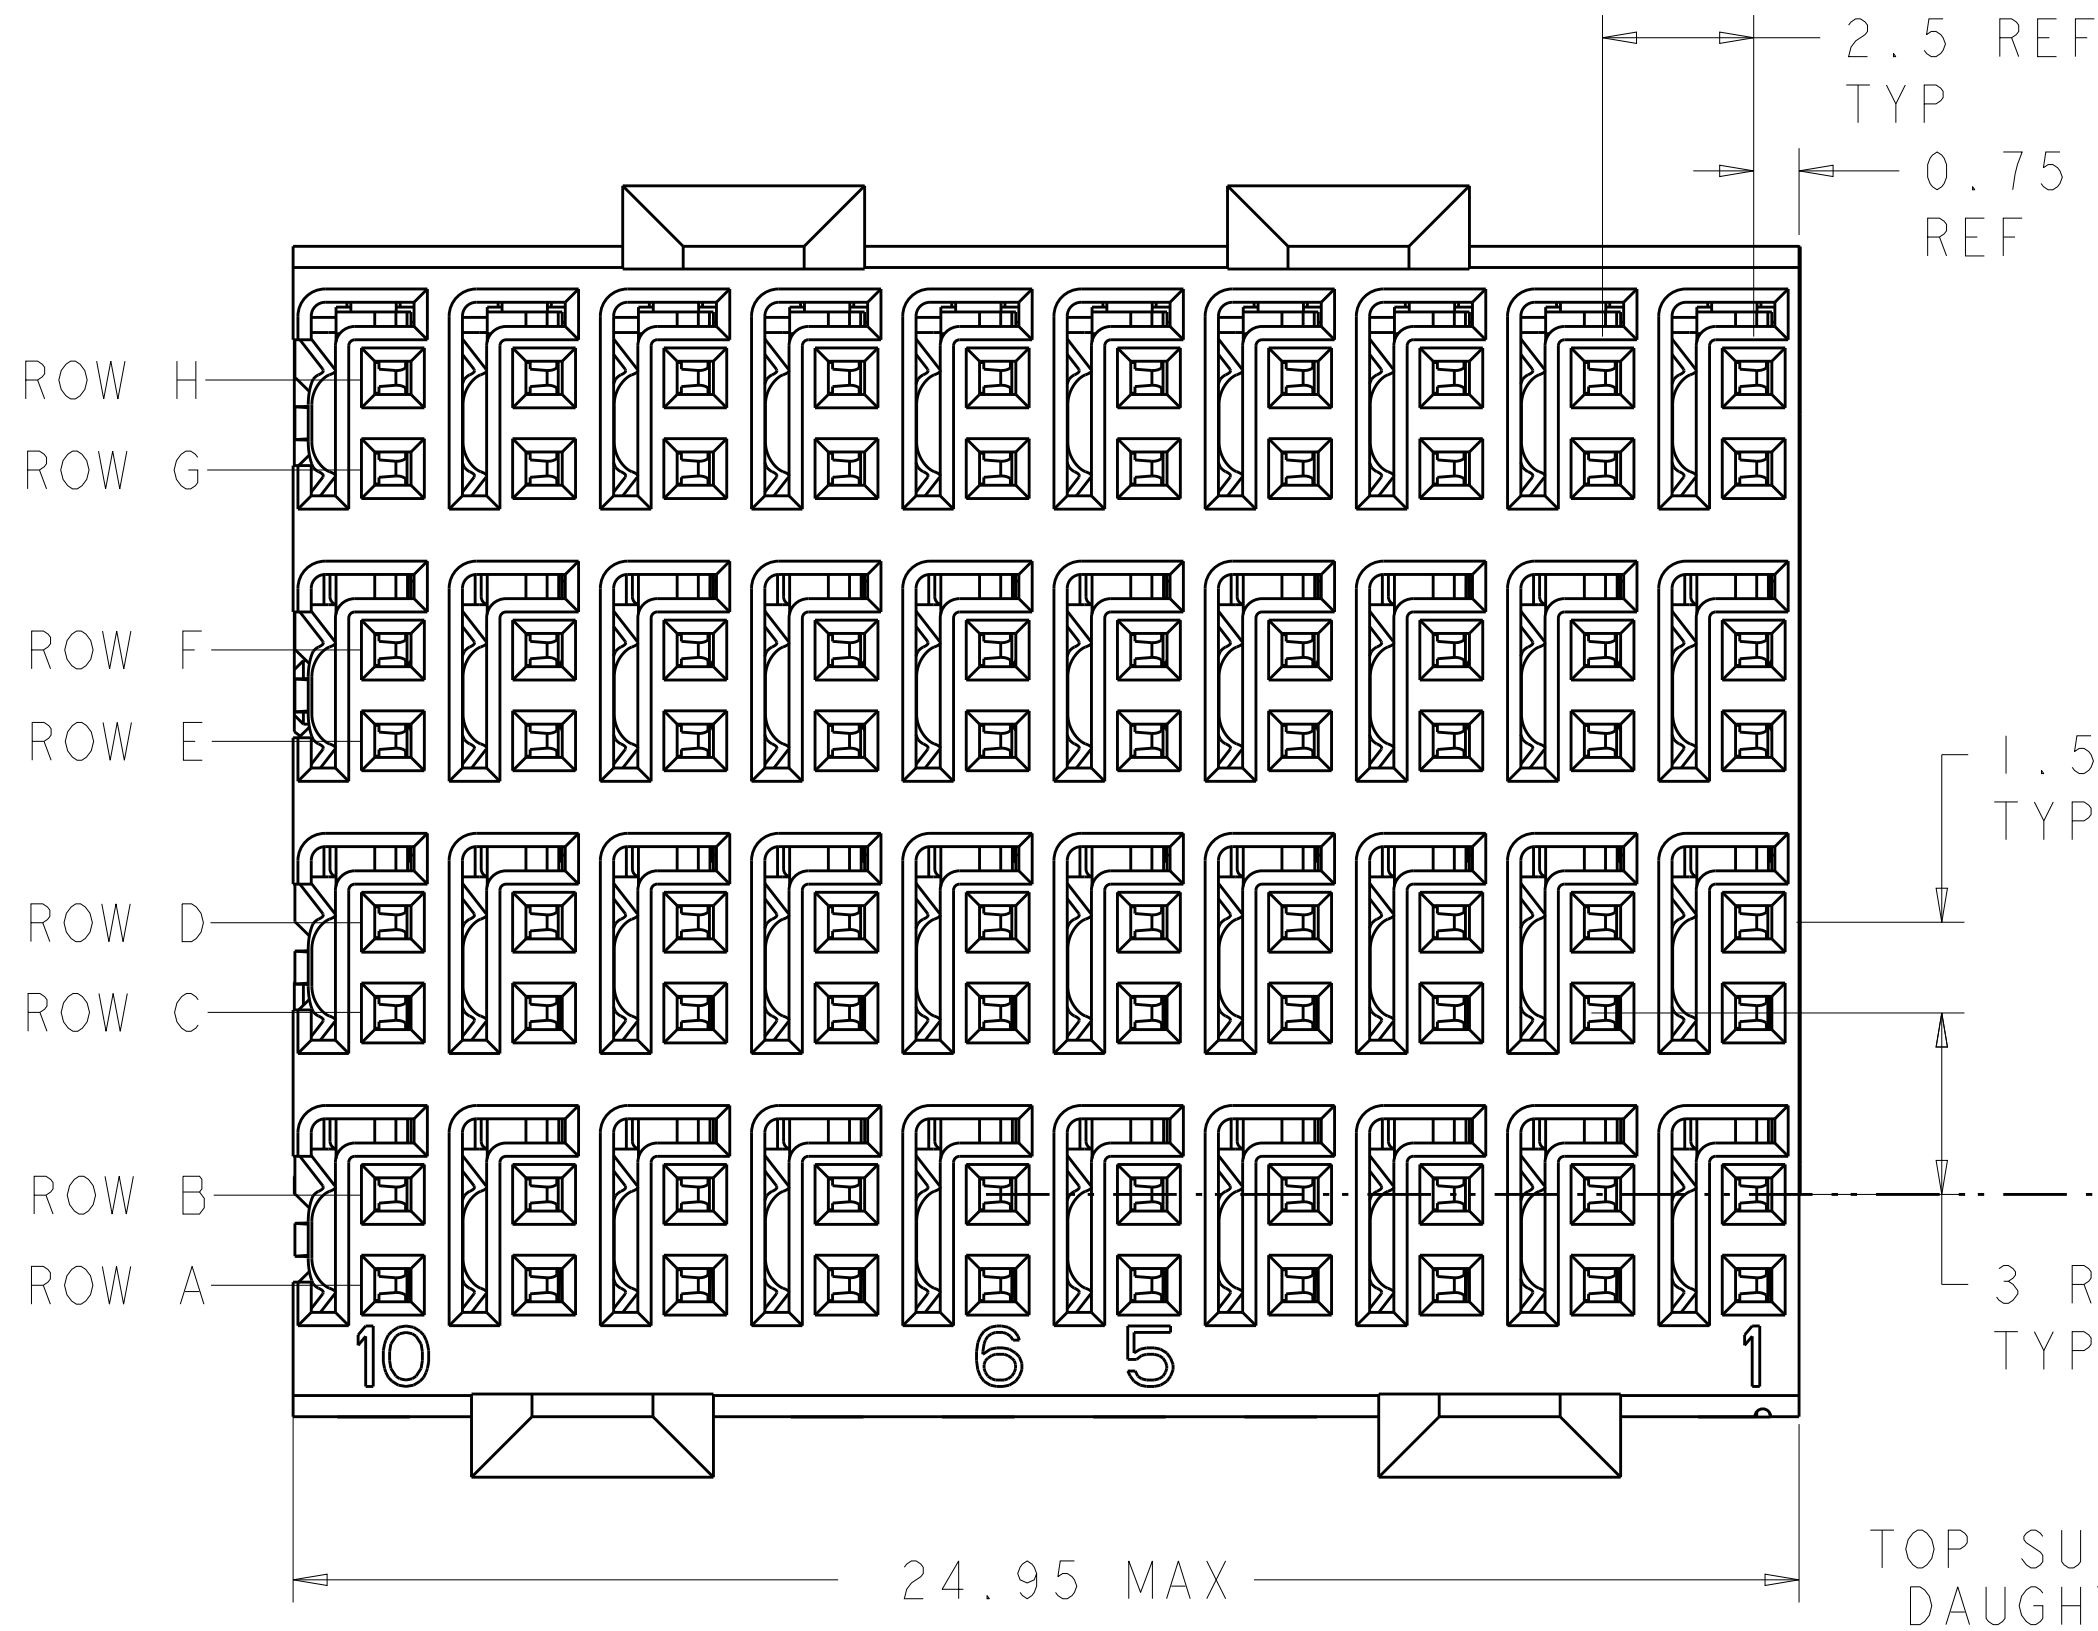

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 26APR2004	TE Connectivity	
DIMENSIONS:		CHK R. A. PATTERSON 26APR2004		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. A. PATTERSON 26APR2004	NAME	
	0 PLC ±	PRODUCT SPEC	RECEPTACLE ASSEMBLY, 4 PAIR, HMZd	
	1 PLC ±	APPLICATION SPEC		
	2 PLC ±		SIZE CAGE CODE DRAWING NO	
	3 PLC ±			
	4 PLC ±		A100779C=6469001	
	ANGLES ±			
MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING	
			SCALE 8:1	SHEET 1 OF 1
			REV H	