


RoHS
Compliant



Internal Connection Diagram

Specification

Technical data

Current rating range	: 0.8A to 15A
Input voltage rating	: 125/250V AC; 12/24V DC
Interrupting Capacity	: 125/250V AC × 200A
Interrupting capacity Icn	: 0.8A. 1.0A 6x In; AC max 6A 1.1A... 1.5A 6x In; AC max 9A 1.6A... 15A Bx In, AC max 45A
Reset time	: 200% of rating current within 50 seconds 150% of rating current wrthin 5 minutes
Dielectric Strength	: >1,500V AC/min
Insulation Resistance	: >100MΩ (DC 500V)
Degree of protection	: Terminal area IP00; operating area IP30
Typical life	: 1,000 operations at 200% overload.

Mechanical/Environmental Data

Operating Ambient Temperature	: -10°C to +60°C
Termination	: 110"(2.8mm) quick connects or solder terminals

Typical applications

Transformers, Motors, Battery chargers, Power supplies, appliances, extra low voltage systems, machinery

Calibration (at 25°C)


Rated: 6-15A

100% of Rated Current	: Hold, No Trip
135% of Rated Current	: Trip Within 1 Hour.
200% of Rated Current	: 3.0-50 sec Trip
300% of Rated Current	: 0.85-5 sec Trip


Thermal Circuit Breaker

multicompPRO

Diagram

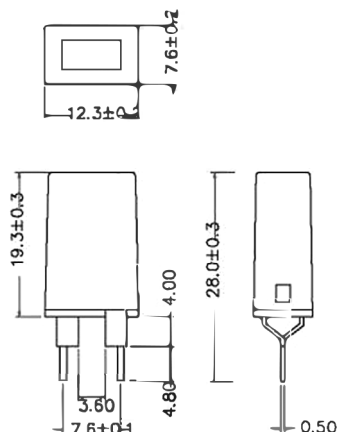

Trip Time Curves

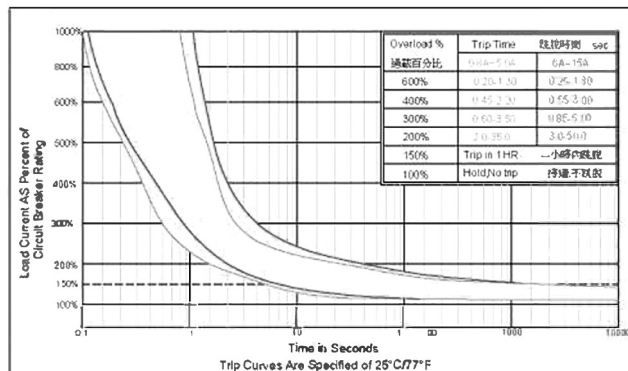

Ambient Temperature Correction Factor

Ambient temperature	0.10°C	0°C	10°C	25°C	35°C	40°C	50°C	60°C
Division factor	1.3	1.2	1.1	1	0.94	0.85	0.73	0.68

The time/current characteristic curve depends on the ambient temperature prevailing, in order eliminate nuisance tripping. Please divide the circuit breaker current ratings by the derating factor shown below.

Example:

Normal Continuous Current : 10A
 Ambient Temperature : 40°C
 Division Factor : 0.85
 Recommended Rating : 10A/0.85=11.8A
 Select the Nearest Rating : 12A

Max. Internal Resistance

Max resistance V.S Current rating at 25°C	
Amp rating	Max resistance
0.8-1.5 Amp	<0.65Ω
1.6-2 Amp	<0.15Ω
2.1-2.9 Amp	<0.1Ω
3-4 Amp	<0.075Ω
4.1-6 Amp	<0.06Ω
6.1-8 Amp	<0.05Ω
8.1-10 Amp	<0.045Ω
11-150 Amp	<0.04Ω

Part Number Table

Description	Part Number
Thermal Circuit Breaker, Auto reset, 1 pole, 1A	MP013620

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicompPRO