

TA-Nr.
Für diese Zeichnung behalten wir uns
das Urheberrecht gemäß DIN 34 vor

Technical Data

Application and basic function

Controlled switch-ON/OFF of the on-board power supply in commercial vehicles.
This device integrates the basic of a monostable two coil featuring for a strong pull in and an economical holding.
The electronic-unit takes over the relay-control, the evaluation for current monitoring, the main-contact-control and other control-functions.

Operational Characteristics

OVERCURRENT THRESHOLD 1.....±350 AMP ± 5%
BLANKING 1 (T1).....10 sec ±100 MSEC
OVERCURRENT THRESHOLD 2.....±1500 AMP ± 5%
BLANKING 2 (T2).....APPROX. 150 MSEC

OPERATION TIME
OPERATE OVER SUPPLY VOLTAGE.....MAX. 150 MSEC
OPERATE OVER INIT.....MAX. 100 MSEC

CONTROL INPUT (INIT)
CONTROL SIGNAL.....ACTIVE LOW
CONTROL THRESHOLD.....1 VDC ±0,5 VDC
FUNCTION.....RELAY ON / OFF

ANALOGUE-OUTPUT:
LINEAR VOLTAGE-OUTPUT (0,1-4,9 VDC)
-300A = 0,0 VDC
0A = 2,5 VDC
+300A = 5,0 VDC
TOLERANCE: ±2% ±5A

General Data

Temperature range.....-40°C to +85°C
Storage temperature.....-46°C to +95°C(95°C for 2h)

Interior protection.....IP67(0,2bar-1min)and IP6K9K
.....after IEC529 and DIN 40 050 T9
Terminal protection.....IP00/ IEC529 and DIN 40 050 T9

Vibration.....4 g/50-2000Hz
Shock.....6 g/11msec
after ISO 16750 for road vehicles

Resistance.....against most oils, hydraulic fluids,
fuels, alcohol, fire-extinguishing agents,
battery acid, salt spray, injurious gas,
cleaning agents, humidity, alternating temperature

Mounting position.....optional
Weight.....approx. 890 gr

Electrical Data

Nominal Voltage.....24VDC
Voltage range.....16-32VDC
Spikes.....70VDC FOR 2 MSEC
Min. operational Voltage.....16VDC
Overvoltage.....36VDC bei 40°C/ 1h

Min. Insulation Resistance.....100MOhm
After live or environmental.....50MOhm
Dielectric withstanding voltage.....1050VAC/1min



Relay Data

Duty rating.....300A continuous
Overload.....3000A for 1sec, 750A for 20sec

Contact life, 300A resistive load200 000 cycles
Mechanical life.....300 000 cycles

Contact drop (at 300A duty rating).....150mVDC
Contact drop after life test.....175mVDC

Resistance Pull in coil.....approx 5,2 Ohms ±10%
Pull in current max.....4A for 20 Msec.
Resistance Holding coil.....approx 101 Ohms ±10%
Holding current max.....max. 0,3A

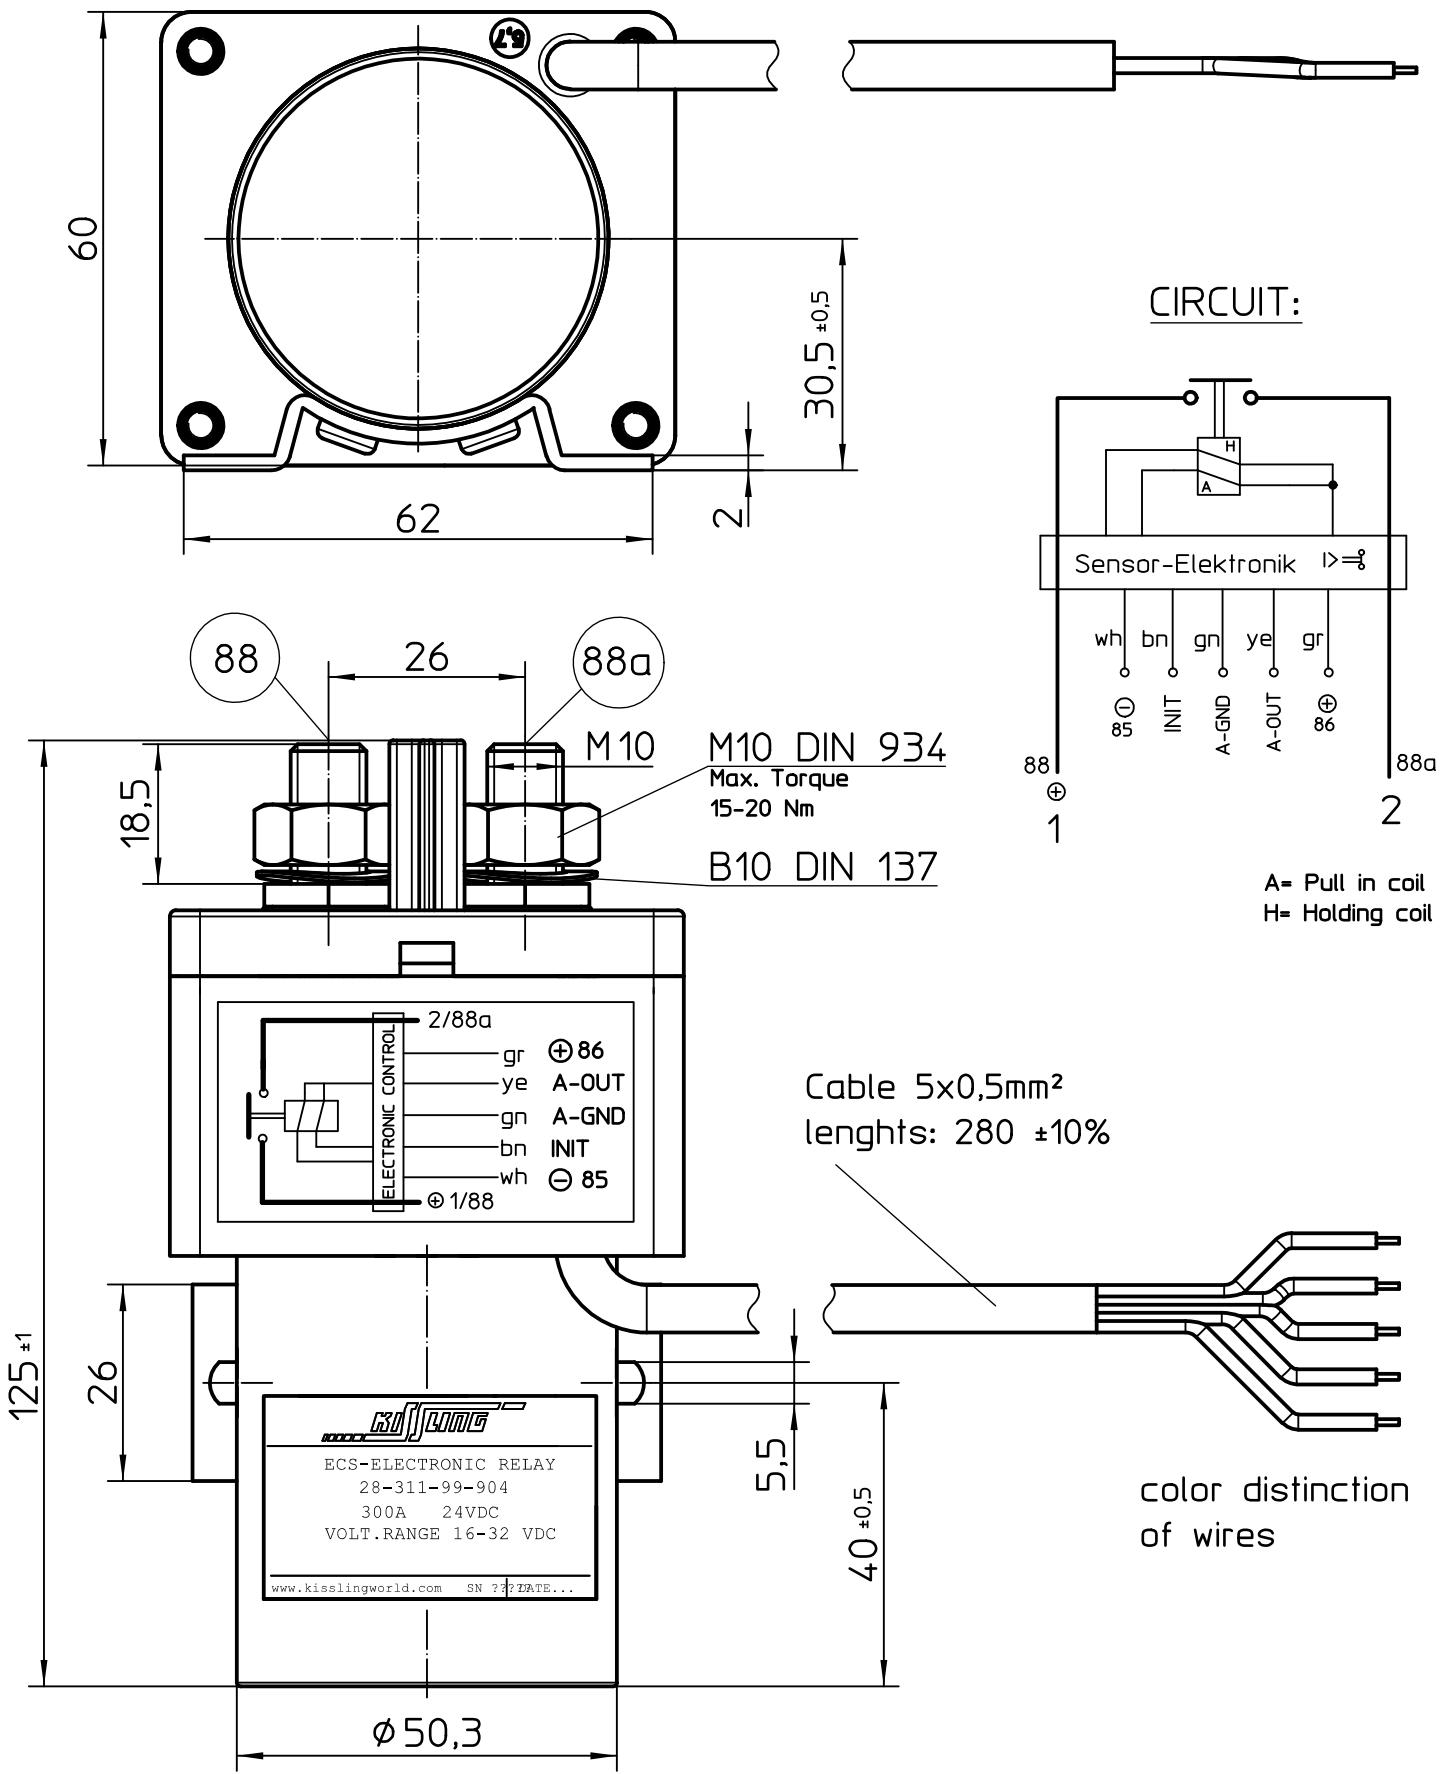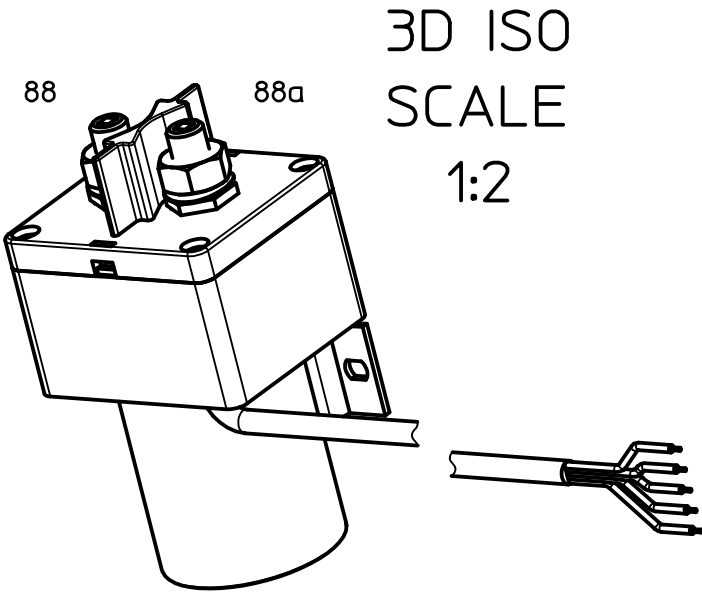

ECS-Power Relay 300AMP (24VDC)					Bl. 1 v. 1	
	Datum	Name	Freimaßtoleranz	Maßstab		Zeichnungsnummer
Bearb.	17.06.2014	Kaise	DIN ISO 2768 cL	1:1		28-311-99-904
Gepr.	21.07.2015	Kaise	Bl. 1 v. 1			Kunden-Znr.: