

RoHS
Compliant



Features

- Microminiature automotive relay
- Dimensions: 15.6mm × 12.2mm × 13.7mm
- Double make contact
- Applications: Car alarm, reverse sensor, etc

Specification

Contact Data		
Contact Form		Double N.O. Contact
Contact Material		Ag Alloy
Contact Rating		12V: 2 × 6A 13.5V DC Resistive 24V: 2 × 5A 28V DC Resistive
Contact Resistance		Max. 100mΩ (6V DC 1A)
Load	Max.Continuous current	2×10A (23°C, 1h)
	Max.Switching Voltage	2×10A
	Min. Switching Load	6V DC 1A
Life	Electrical	100,000 operations
	Mechanical	10,000,000 operations
Coil Data		
Nominal Coil Power		1W
General Data		
Insulation Resistance		Min.100MΩ 500V DC
Dielectric Strength	Between open contacts	550V AC, 1min
	Between coil and contacts	
Operate Time		Max. 10ms
Release Time		Max. 5ms
Operating Temperature		-40°C to +85°C
Humidity		35-95%RH, 40°C
Shock Resistanc	Endurance	1,000m/s ²
	Misoperation	100m/s ²
Vibration Resistance	Endurance	10-55Hz, 1.5mm double amplitud
	Misoperation	10-55Hz, 1.5mm double amplitude
Weight		Approximately 6g

Note:Data shown are of initial value


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

Coil Data

Ambient Temperature: 23°C

Model	Nominal Voltage V DC	Coil Resistance $\Omega \pm 10\%$	Operate Voltage $\leq V$ DC	Release Voltage $\geq V$ DC	Coil Power W
MPCMA55-S-DC12V-A	12	144	6.9	1.2	1


Outline, Wiring Diagram, Mounting Hole Layout

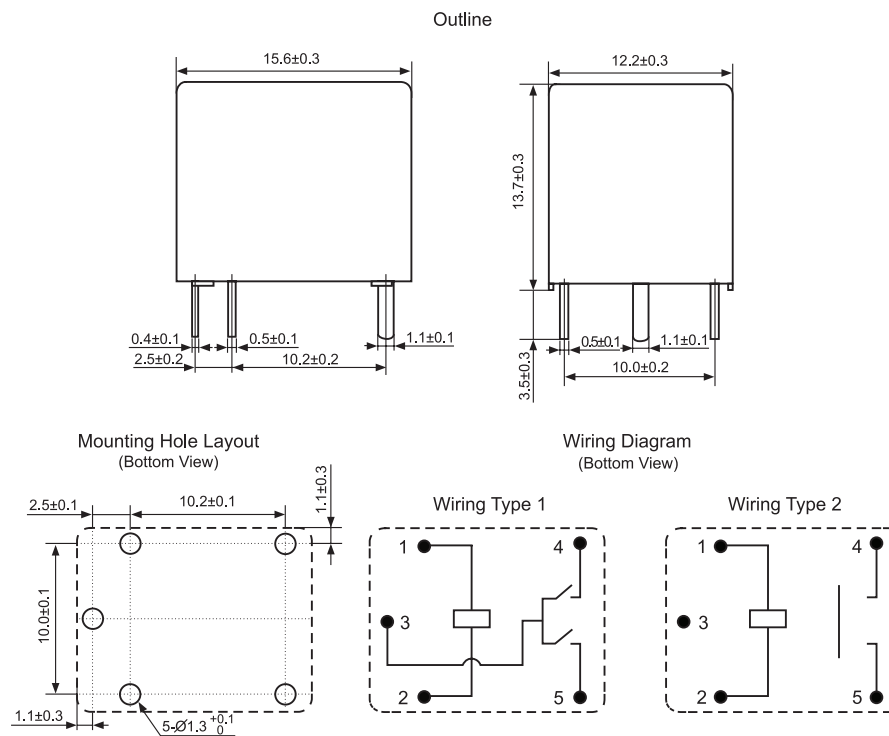


Dimensions : Millimetres

Reference Data

Coil Temperature Rise

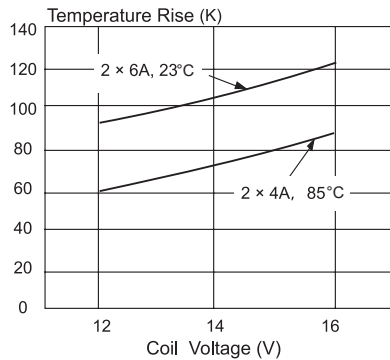

Operate, Release Voltage VS. Temperature (12VDC)

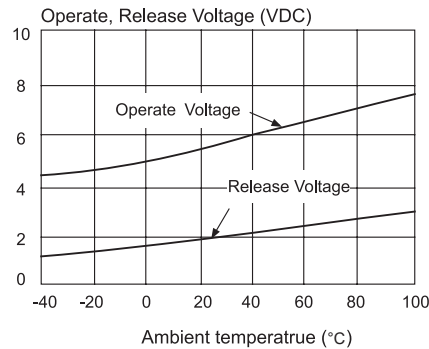

Part Number Table

Description	Part Number
Automotive Relay, PCB Type, NO, 1.0W, 2 x 6A	MPCMA55-S-DC12V-A

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.