

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples



Check Inventory



11.5 x 5.0 x 3.5 mm

RoHS/RoHS II Compliant

MSL Level = N/A



Features

- High reliability & Low Cost
- Tight stability & extended temperature
- Proven resistance welded metal package

Applications

- Home electronics
- Computers, modems, and communications
- High-precision TCXO and clock applications
- Microprocessors

Key Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	3.579545		70.00		
Operation mode	3.579545		24.00	MHz	Fundamental AT- cut (Standard)
	24.01		70.00		3rd OT AT-cut (Standard)
	24.01		50.00		Fundamental AT- cut or BT-cut (See options)
Operating Temperature	0		+70	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Tolerance	-50		+50	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-50		+50	ppm	See options
Equivalent series resistance (R1)	See Table 1 below			Ω	
Shunt capacitance (C0)			7	pF	
Load capacitance (CL)		18		pF	See options
Drive Level		100	1000	μW	
Aging @ 25°C per year			±5	ppm	
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V
Drive Level Dependency (DLD, Minimum 7 points tested: from 1μW to 500μW)			±10	ppm	Δfrequency (Max – Min)
			25% of Max ESR	Ω	ΔESR (Max – Min)
			Max ESR in Table 1	Ω	Max ESR over DLD range

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples



Check Inventory



11.5 x 5.0 x 3.5 mm

RoHS/RoHS II Compliant

MSL Level = N/A

TABLE 1

Frequency (MHz)	ESR(Ω) max.
3.579 - 4.999 (Fund.)	180
5.000 - 5.999 (Fund.)	120
6.000 - 7.999 (Fund.)	100
8.000 - 8.999 (Fund.)	80
9.000 - 9.999 (Fund.)	60
10.000 - 15.999 (Fund.)	50
16.000 - 50.000 (Fund.)	40
24.01 - 31.999 (3rd O/T)	100
32.000 – 70.00 (3rd O/T)	80

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples



Check Inventory



11.5 x 5.0 x 3.5 mm

RoHS/RoHS II Compliant

MSL Level = N/A



Options and Part Identification (left blank if standard)

ABL - MHz - - - - - -

Frequency in MHz

Please specify the frequency in xx.xxxxMHz.
e.g. 14.3181MHz

Load Capacitance (pF)

Please specify CL
(Minimum 10pF) in pF
or S for series

Custom ESR if other than standard

R□
□: Specify a value in Ω
(e.g.: R40)

Operating Temp.

A: -10°C ~ +60°C
B: -20°C ~ +70°C
C: -30°C ~ +70°C
N: -30°C ~ +85°C
D: -40°C ~ +85°C
J*: -40°C ~ +105°C
K*: -40°C ~ +125°C
L*: -55°C ~ +125°C

Freq. Tolerance

H5: ± 5 ppm
1: ± 10 ppm
7: ± 15 ppm
2: ± 20 ppm
3: ± 25 ppm
4: ± 30 ppm

Freq. Stability

U**: ± 10 ppm
G: ± 15 ppm
X: ± 20 ppm
W: ± 25 ppm
Y: ± 30 ppm
H: ± 35 ppm
Q: ± 100 ppm
R: ± 150 ppm

Packaging

Blank: Bulk
T: Tape & Reel
TRAY: Tray

Value Added

I	Insulator Tab
L2	Middle 3rd lead
QXX	Trimmed leads
Q15	for 0.15" length

Oscillation Mode

F: Fund. AT>24MHz
FB***: Fund. BT>24MHz

NOTES:

* Frequency stability ±50ppm, ±100ppm, ±150ppm only. Contact ABRACON for tighter frequency stability.

** Contact ABRACON for availability of ± 10 ppm with other Operating Temp. options.

*** Fundamental BT frequency stability ± 100ppm max at -10°C ~ +60°C only.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 03-31-23

ABRACON IS
ISO9001-2015
CERTIFIED

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples




Check Inventory



11.5 x 5.0 x 3.5 mm
RoHS/RoHS II Compliant
MSL Level = N/A



Mechanical Dimensions

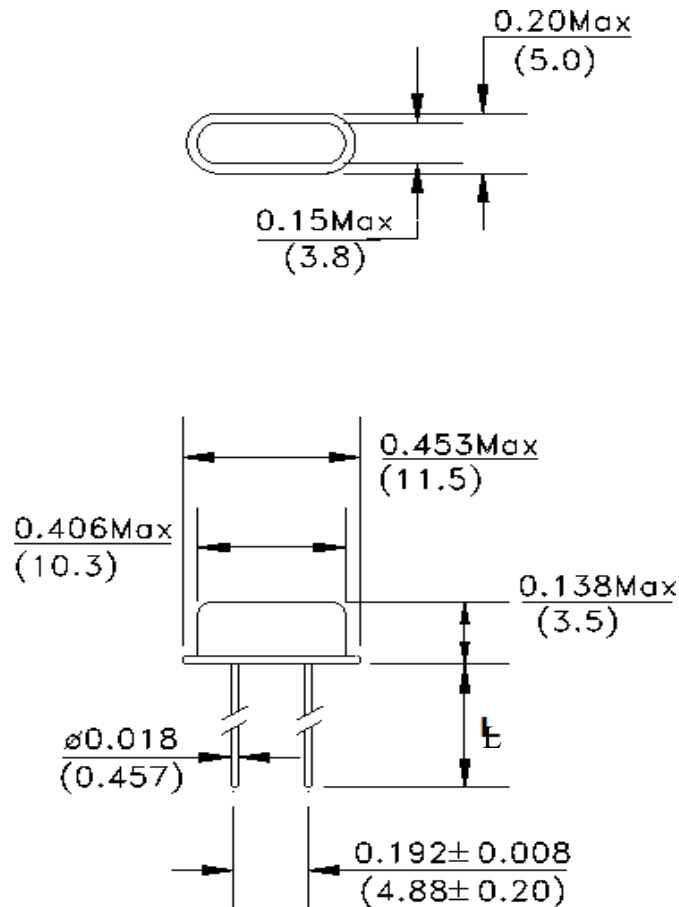

L	Packaging
5.5mm Min	Bulk
20.0 ± 0.5mm	Tape & Reel

Dimensions: inch (mm)



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 03-31-23

ABRACON IS
ISO9001-2015
CERTIFIED

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples



Check Inventory



11.5 x 5.0 x 3.5 mm

RoHS/RoHS II Compliant

MSL Level = N/A



Reflow Profile [JEDEC J-STD-020]

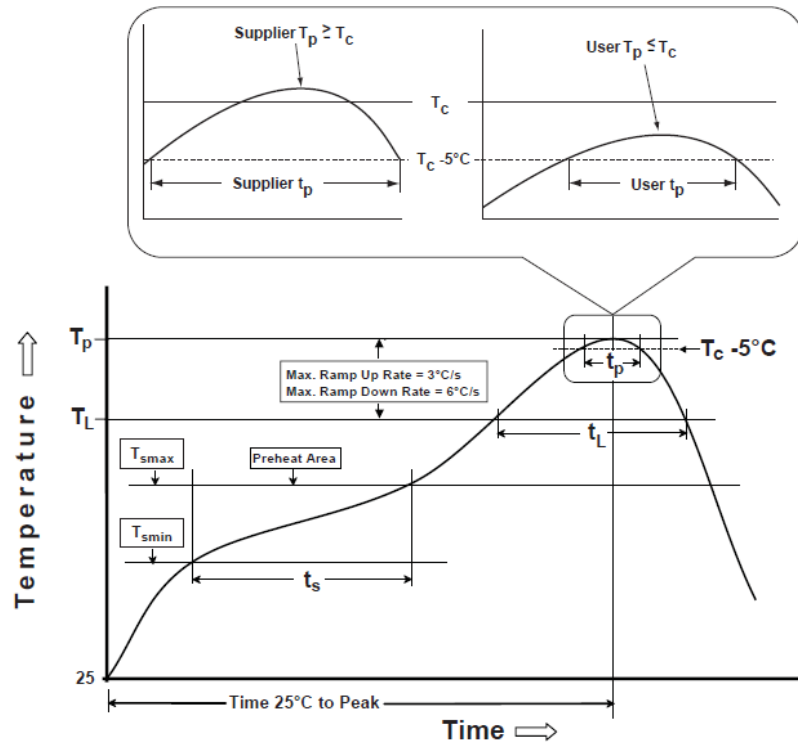


Table 1

SnPb Eutectic Process

Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process

Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

ABL SERIES HC49/US (AT49) MICROPROCESSOR CRYSTAL

ABL Series

Request Samples



Check Inventory




11.5 x 5.0 x 3.5 mm
RoHS/RoHS II Compliant
MSL Level = N/A



Packaging

T= Tape and reel (1,000pcs/reel)

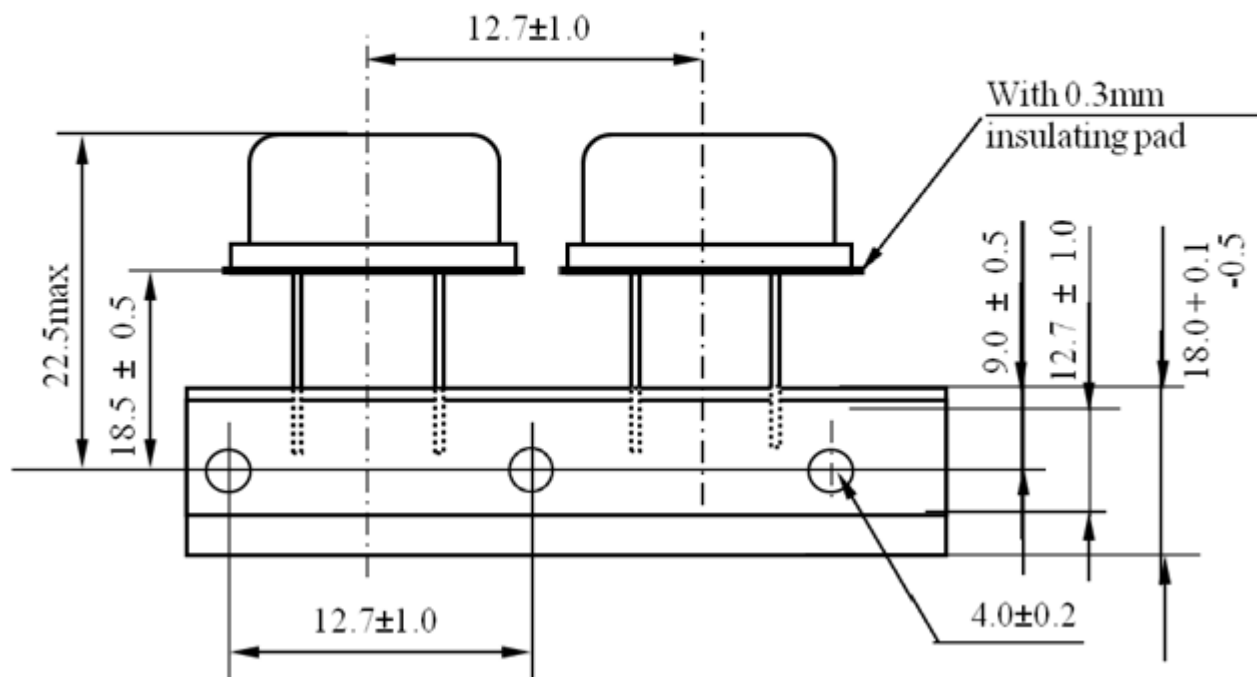

Dimensions: inch (mm)

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 03-31-23

ABRACON IS
ISO9001-2015
CERTIFIED