

Features

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges from -40°C to $+85^{\circ}\text{C}$
- Supply Voltages: 1.8V, 2.5V, 3.3V, 5.0V

1.8V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1.000 ~ 160 MHz
Temperature Range	
Storage (T_{STG})	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	$1.8\text{V} \pm 5\%$
Input Current (I_{DD})	
1.000 ~ 32.000MHz	5 mA
>32.000 ~ 70.000MHz	10 mA
>70.000 ~ 120.000MHz	15 mA
>120.000 ~ 160.000MHz	30 mA
Standby Current	10 μA
Output Symmetry (50% V_{DD})	40 % ~ 60 %
Rise/Fall Time (20%~80% V_{DD} Levels) (T_R/T_F)	
1.000 ~ 32.000MHz	5 nS
>32.000 ~ 120.000MHz	3.5 nS
>120.000 ~ 160.000MHz	3 nS
Output Voltage (V_{OL})	20 % V_{DD}
(V_{OH})	80 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	300 nS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.8V		
Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.000 ~ 160.000
±100PPM ²	-20 ~ +70	1.000 ~ 160.000
±100PPM ²	-40 ~ +85	1.000 ~ 160.000
±50PPM ²	-10 ~ +70	1.000 ~ 160.000
±50PPM ²	-20 ~ +70	1.000 ~ 160.000
±50PPM ²	-40 ~ +85	1.000 ~ 160.000
±25PPM ²	-10 ~ +70	1.000 ~ 160.000
±25PPM ²	-20 ~ +70	1.000 ~ 160.000
±25PPM ³	-40 ~ +85	1.000 ~ 160.000
±20PPM ³	-10 ~ +70	1.000 ~ 160.000
±20PPM ³	-20 ~ +70	1.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance and operating temperature range.

2.5V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1 ~ 160 MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	2.5V±5%
Input Current (I_{DD})	
1.000 ~ 32.000MHz	7 mA
>32.000 ~ 50.000MHz	12 mA
>50.000 ~ 125.000MHz	26 mA
>125.000 ~ 160.000MHz	35 mA
Standby Current (I_{ST})	10µA
Output Symmetry (50% V_{DD})	
1.000 ~ 50.000MHz	45 % ~ 55 %
> 50.000 ~ 160.000MHz	40 % ~ 60 %
Rise/Fall Time (10%~90% V_{DD} Levels) (T_R/T_F)	5 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 2.5V		
Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.000 ~ 160.000
±100PPM ²	-20 ~ +70	1.000 ~ 160.000
±100PPM ²	-40 ~ +85	1.000 ~ 160.000
±50PPM ²	-10 ~ +70	1.000 ~ 160.000
±50PPM ²	-20 ~ +70	1.000 ~ 160.000
±50PPM ²	-40 ~ +85	1.000 ~ 160.000
±25PPM ²	-10 ~ +70	1.000 ~ 160.000
±25PPM ²	-20 ~ +70	1.000 ~ 160.000
±25PPM ²	-40 ~ +85	1.000 ~ 160.000
±20PPM ³	-10 ~ +70	1.000 ~ 160.000
±20PPM ³	-20 ~ +70	1.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance and operating temperature range.

3.3V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1 ~ 170MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	3.3V±10%
Input Current (I_{DD})	
1.000 ~ 32.000MHz	15 mA
>32.000 ~ 50.000MHz	20 mA
>50.000 ~ 67.000MHz	25 mA
>67.000 ~ 170.000MHz	40 mA
Standby Current (I_{ST})	10µA
Output Symmetry (50% V_{DD})	
1.000 ~ 50.000MHz	45 % ~ 55 %
>50.000 ~ 170.000MHz	40 % ~ 60 %
Rise/Fall Time (10%~90% V_{DD} Levels) (T_R/T_F)	
1.000 ~ 80.000MHz	6 nS
>80.000 ~ 125.000MHz	4 nS
>125.000 ~ 170.000MHz	3 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 3.3V		
Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.000 ~ 170.000
±100PPM ²	-20 ~ +70	1.000 ~ 170.000
±100PPM ²	-40 ~ +85	1.000 ~ 170.000
±50PPM ²	-10 ~ +70	1.000 ~ 170.000
±50PPM ²	-20 ~ +70	1.000 ~ 170.000
±50PPM ²	-40 ~ +85	1.000 ~ 170.000
±25PPM ²	-10 ~ +70	1.000 ~ 170.000
±25PPM ²	-20 ~ +70	1.000 ~ 170.000
±25PPM ²	-40 ~ +85	1.000 ~ 170.000
±20PPM ³	-10 ~ +70	1.000 ~ 170.000
±20PPM ³	-20 ~ +70	1.000 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance and operating temperature range.


5.0V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F ₀)	1.544 ~ 50MHz
Temperature Range	
Storage (T _{STG})	-55 ~ +125°C
Supply Voltage (V _{DD})	5.0V ± 10%
Input Current (I _{DD})	35 mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise/Fall Time (10%~90%V _{DD} Levels) (T _R /T _F)	10 nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	10 mS
Output Disable Time ¹	100 nS
Output Enable Time ¹	100 nS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 5.0V		
Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.544 ~ 50.000
±100PPM ²	-40 ~ +85	1.544 ~ 50.000
±50PPM ²	-10 ~ +70	1.544 ~ 50.000
±50PPM ²	-40 ~ +85	1.544 ~ 50.000
±25PPM ²	-10 ~ +70	1.544 ~ 50.000
±25PPM ³	-40 ~ +85	1.544 ~ 50.000
±25PPM ³	-10 ~ +70	1.544 ~ 50.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Reflow, one-year aging, shock, and vibration.³ Inclusive of 25°C tolerance and operating temperature range.

DIMENSIONS / MECHANICAL SPECIFICATIONS

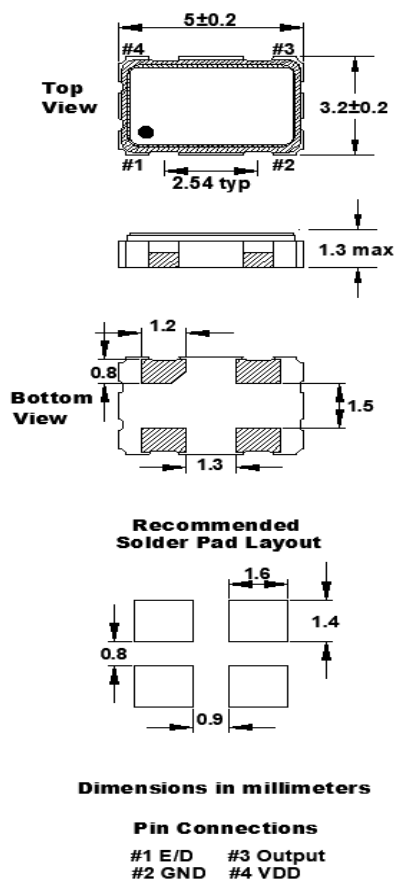

Note:

1, A 0.01μF capacitor should be placed between V_{DD} (Pin 4) and G_{ND} (Pin2) to minimize power supply line noise.

2, Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.

STANDARD SPECIFICATIONS

PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	N/A
Termination Finish	Au (0.3~1μm) over Ni (1.27~8.89μm)
Seal Method	Seam
Lead (Pb) Free	Yes
ROHS Compliant	Yes


FO5HS

(Former F510L, F540L, F530L, F550L)

5mm x 3.2mm
HCMOS SMD Oscillator



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.5	4.0	8.0	5.5	12.0	1.5	-T1 = 1,000	2.0	ø13	ø21	ø62	ø180	13.5	2.0

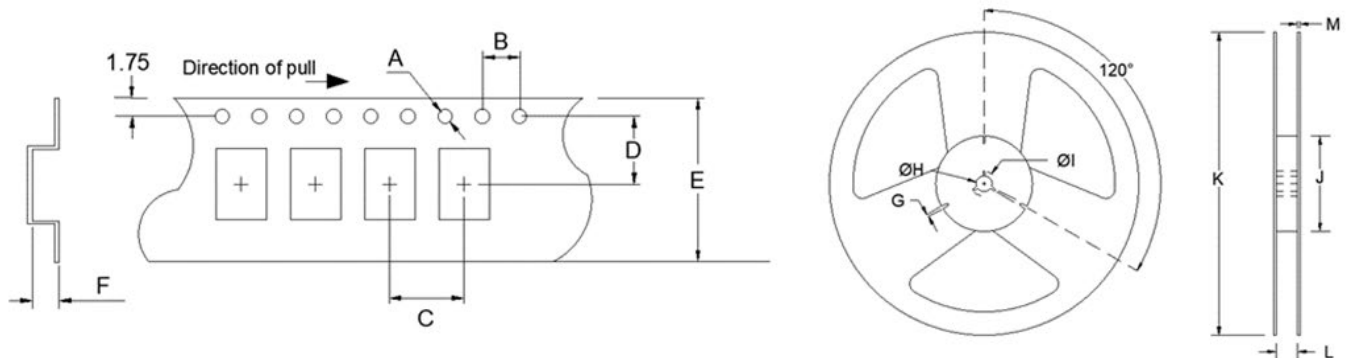

Available Options & Part Identification*

Sample PN: **FO5HSCBM25.0-T1**

F	O5HS	C	B	M	25.0	-T1
Fox	Model Number	Voltage K = 1.8V±5% H = 2.5V±5% C = 3.3V±10% A = 5.0V±10%	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C F = -20 to +70°C M = -40 to +85°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs

*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available
See stabilities and op temps for each V_{DD}.

Reliability Test Conditions

Please contact Abracon Quality Assurance department