

ELV10

10 x 25 mm EV fuse



Product features

- 10 x 25 mm fuse
- Current rating: 10 A to 100 A
- Up to 200 Vdc rating
- High breaking capacity for high energy applications
- Designed to JASO D622, ISO8820-8, GB/T31465
- Produced in a factory with ISO9001 & IATF16949 certification
- Minimum breaking capacity 300% I_n at rated DC voltage
- Bolt-down terminal and PCB terminal options

Applications

- Automotive and commercial vehicle on-board chargers
- Uninterruptible power supplies (UPS)
- 3-phase EVSE and charging infrastructure
- Motor protection
- Rectifiers and inverters
- Energy storage systems
- On-board electric vehicle powertrain and distribution

Agency information

cURus Recognition file number: E91958



Environmental compliance



Ordering part number

ELV10-30-SCT

Family code _____
Ampere rating (30 = 30 A) _____
Option code _____

Option code

2P = 2 pin PCB terminal
SCT= Bolt down single cap
FT = Bolt down flush

Electrical characteristics

Amps (A)	Minimum (seconds)	Maximum (seconds)
2.0 In	1.0	100
3.0 In	0.1	15
5.0 In	0.05	1.0

Product specifications

Part number	Rated voltage	Rated current (A)	Breaking capacity ²	Typical cold resistance (mΩ)	Typical voltage drop (mV)	Power loss @ 0.5 In (W)	cURus
ELV10-10	200 Vdc	10	200 Vdc/50 kA	9.15	130	0.26	
ELV10-15	200 Vdc	15	200 Vdc/50 kA	5.5	120	0.33	X
ELV10-20	200 Vdc	20	200 Vdc/50 kA	4.61	150	0.51	X
ELV10-25	200 Vdc	25	200 Vdc/50 kA	3.2	130	0.61	X
ELV10-30	200 Vdc	30	200 Vdc/50 kA	2.68	140	0.75	X
ELV10-40	200 Vdc	40	200 Vdc/50 kA	1.69	110	1.13	X
ELV10-50	200 Vdc	50	200 Vdc/50 kA	1.32	120	1.35	X
ELV10-63	200 Vdc	63	200 Vdc/50 kA	1.0	110	1.65	X
ELV10-80	200 Vdc	80	200 Vdc/50 kA	0.84	110	1.82	X
ELV10-100	100 Vdc	100	100 Vdc/33 kA	0.59	100	2.3	X

1. Cold resistance is measured at <10% In and +25 °C ambient temperature

2. cURus certified 100 Vdc/10 kA


Dimensions- mm

Tolerances unless otherwise specified

One place x.x = ± 0.3 mm


Two places x.xx = ± 0.13 mm

SCT: Bolt-down single cap

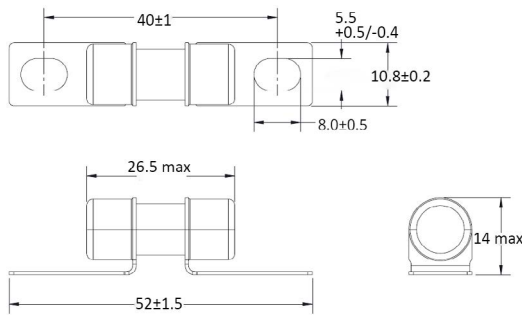

Note: recommended tightening torque is 4.5+/-1.0 Nm for M5 Screw

FT: Bolt-down flush

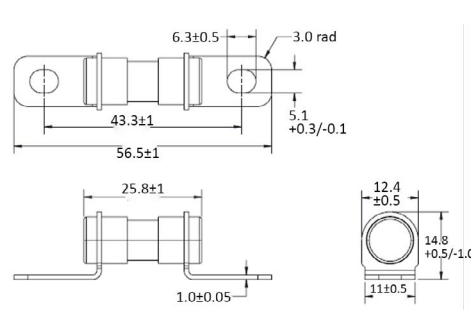


Note: recommended tightening torque is 4.5+/-1.0 Nm for M5 Screw


Part marking

BUSS	Trademark
ELV10	Family name
30A	Rated current
200Vdc	Rated voltage
	Certificate

2P: 2 pin PCB terminal

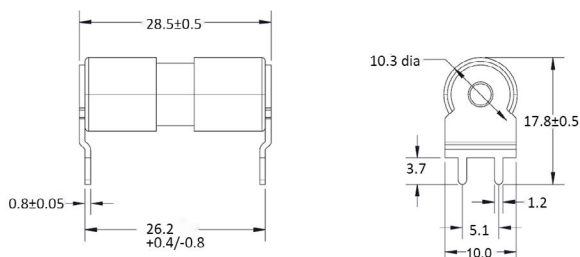

PCB layout 2P: 2 pin PCB terminal

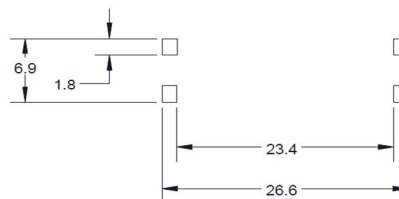

General specifications

Operating temperature: -40 °C to +125 °C with proper derating factor applied

Strength of terminals: JASO D622 6.3.9, mounting torque 4.5 +/-1 Nm, 3 times

Temperature humidity cycling: JASO D622 6.3.4.1,

a) maintain the samples at standard conditions for 4 hours

b) increase T to 55 +/-2 °C at 95% to 99% RH within 0.5 hours

c) maintain T at 55 +/-2 °C at 95% to 99% RH for 10 hours

d) decrease T to -40 +/-2 °C within 2.5 hours; the humidity is uncontrolled

e) maintain T at -40 +/-2 °C for 2 hours; the humidity is uncontrolled

f) increase T to 120 +/-2 °C within 1.5 hours from -40 +/-2 °C; the humidity is uncontrolled

g) maintain T at 120 +/-2 °C for 2 hours; the humidity is uncontrolled

h) allow to return to RT within 1.5 hours; the humidity is uncontrolled 10 cycles.

Thermal shock: ISO8820-8 GB/T31465.6, 48 cycles; -40 °C to 100 °C, each cycle 60 minutes

Vibration: JASO D622 6.3.3, 10-55 Hz, 3 directions, 2 hours each direction


Transient current cycling: JASO D622 6.3.2 (reference), The transient current start from 2.0 In for 0.25 seconds, then drop to 0.5 In and keep this current to 15 seconds to finish one cycle, total 50000 cycles

Lubricant & fuel oil resistance: GB/T31465.1-5.4, Wipe the marking with lubricant or oil 30 seconds


Packaging information

Terminals	Inner package	Ship package
SCT	50 pieces/tray	500 pieces/box
FT	24 pieces/box	576 pieces/box
2P	32 pieces/box	864 pieces/box


Temperature derating curve

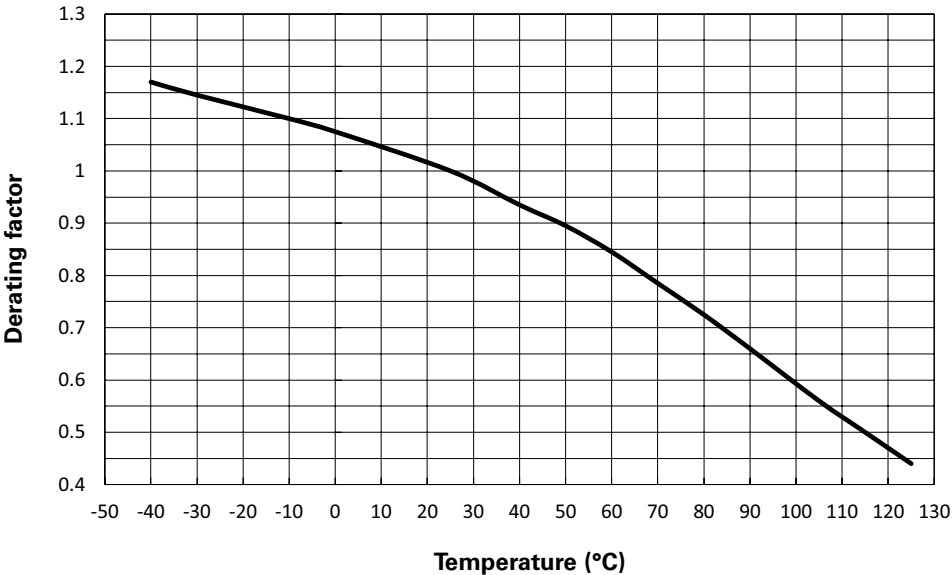


Current vs. time curve

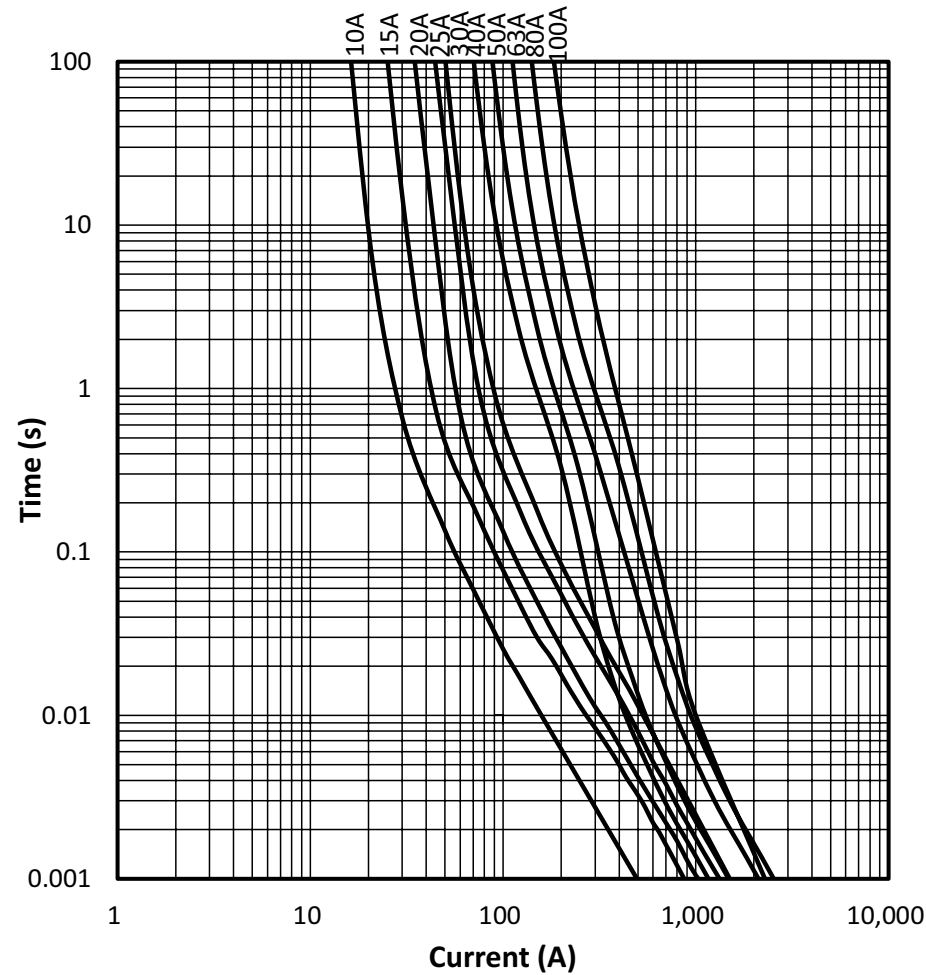


I^2t vs. time curve

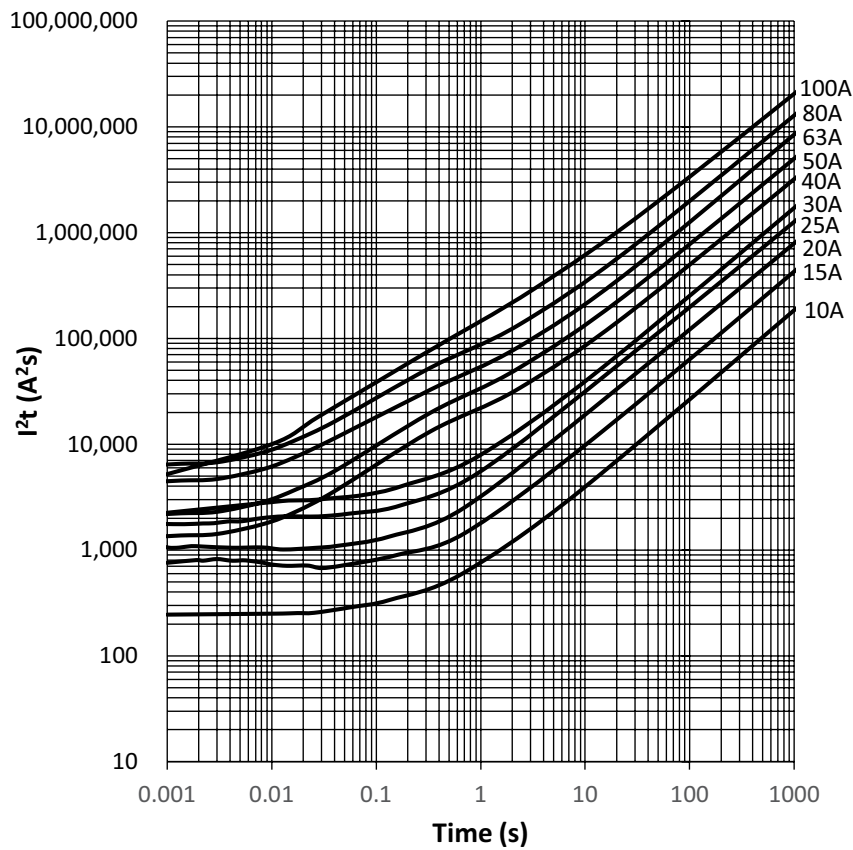

I^2t vs. current curve

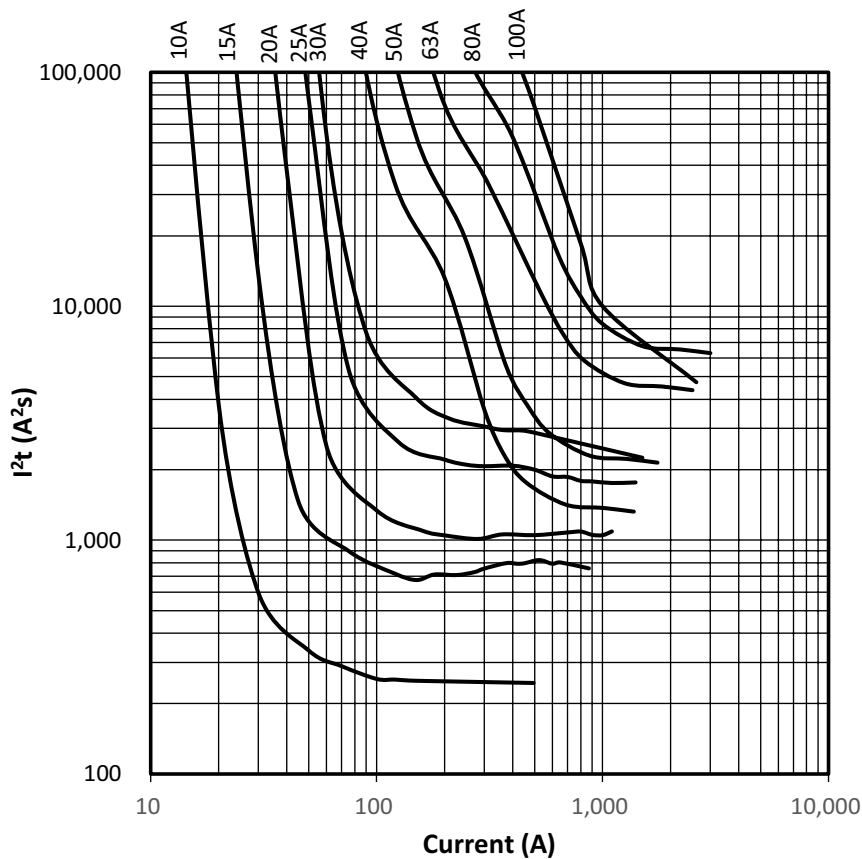

Wave solder profile--PCB version only

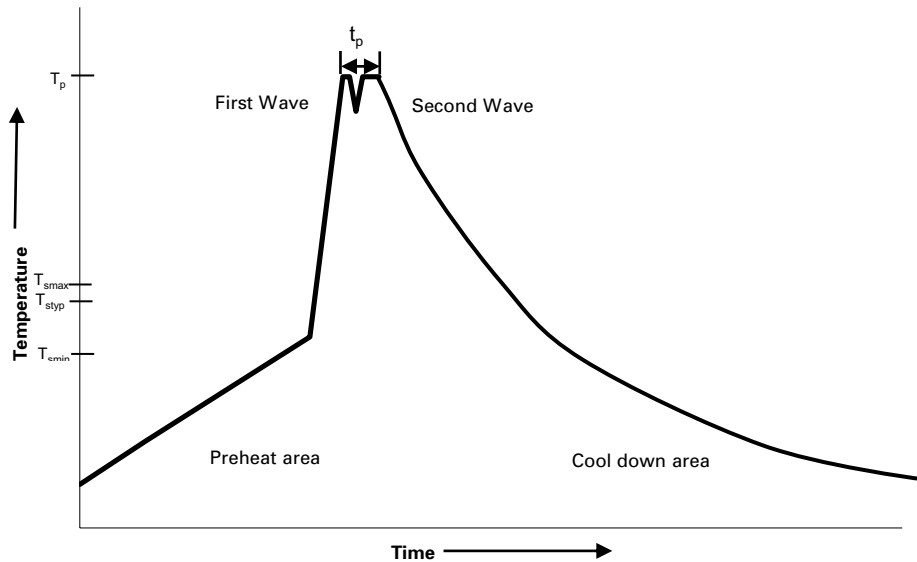

Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat		
• Temperature min. (T_{smin})	100 °C	100 °C
• Temperature typ. (T_{styp})	120 °C	120 °C
• Temperature max. (T_{smax})	130 °C	130 °C
• Time (T_{smin} to T_{smax}) (t_s)	70 seconds	70 seconds
Δ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature (T_p)*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2023 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1302 BU-ELX22165
May 2023

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

