



# Lithium Coin Cell - CR 2330

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH  
compliant



Conflict  
mineral free


## Technical Data Sheet · CR 2330

### SPECIFICATIONS


|                         |                     |
|-------------------------|---------------------|
| Nominal Voltage         | 3V                  |
| Jauch part number       | 250994              |
| Nominal Capacity        | 260 mAh             |
| Standard Load           | 15 kΩ               |
| Standard Current        | 0.2 mA              |
| Max. Continuous Current | 3 mA                |
| Max. Pulse Current      | 18 mA               |
| Operating Temperature   | -30°C to +70°C*     |
| Weight                  | Approx. 3.5 gr.     |
| Chemistry               | Li/MnO <sub>2</sub> |
| UL1642                  | MH62838             |

\* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


### DIMENSIONS

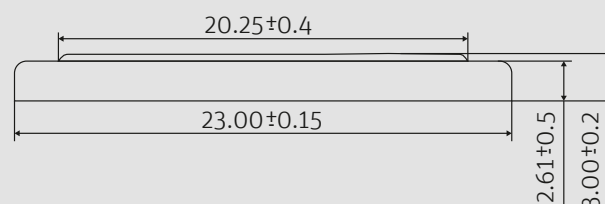


### DISCHARGE CHARACTERISTICS

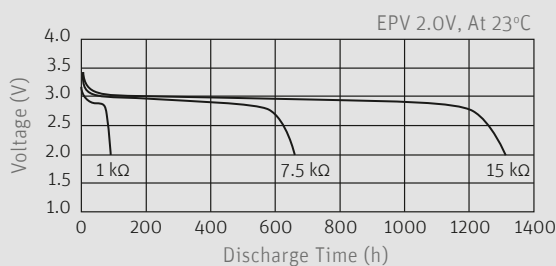


### TEMPERATURE CHARACTERISTICS

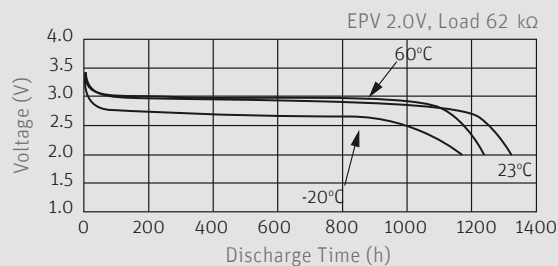

### PULSE DISCHARGE CHARACTERISTICS

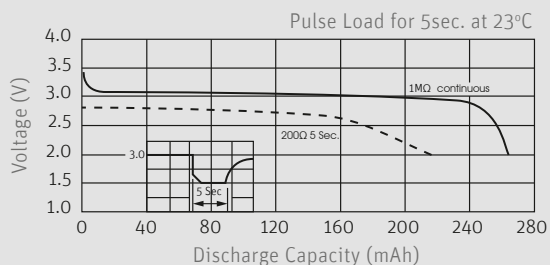

### LOAD VS: CAPACITY

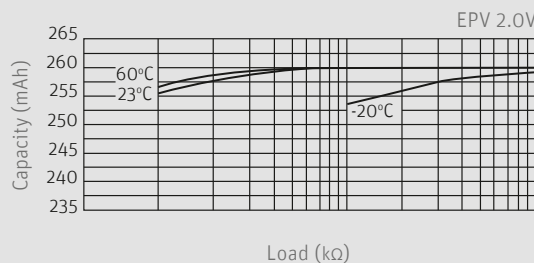

Wide assortment of mounting options, including through hole, surface mount and wire terminals.

Contact Jauch for more information  
batterytechnology@jauch.com