



# GL6-P0111S91

G6

MINIATURE PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type         | Part no. |
|--------------|----------|
| GL6-P0111S91 | 1101834  |

Other models and accessories → [www.sick.com/G6](http://www.sick.com/G6)

Detailed technical data

Features

|                                    |                            |                                       |
|------------------------------------|----------------------------|---------------------------------------|
| <b>Functional principle</b>        |                            | Photoelectric retro-reflective sensor |
| <b>Functional principle detail</b> |                            | Dual lens                             |
| <b>Sensing range max.</b>          |                            | ≤ 5 m <sup>1)</sup>                   |
| <b>Polarisation filters</b>        |                            | Yes                                   |
| <b>Emitted beam</b>                |                            |                                       |
|                                    | Light source               | LED <sup>2)</sup>                     |
|                                    | Type of light              | Visible red light                     |
|                                    | Light spot size (distance) | Ø 15 mm (350 mm)                      |
| <b>Key LED figures</b>             |                            |                                       |
|                                    | Wave length                | 650 nm                                |
| <b>Adjustment</b>                  |                            | None                                  |

<sup>1)</sup> Reflector PL80A.  
<sup>2)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

Safety-related parameters

|                         |             |
|-------------------------|-------------|
| <b>MTTF<sub>D</sub></b> | 2,299 years |
| <b>DC<sub>avg</sub></b> | 0 %         |

## Electrical data

|                                        |                                                        |
|----------------------------------------|--------------------------------------------------------|
| <b>Supply voltage <math>U_B</math></b> | 10 V DC ... 30 V DC <sup>1)</sup>                      |
| <b>Ripple</b>                          | $\pm 10\%$ <sup>2)</sup>                               |
| <b>Current consumption</b>             | 30 mA <sup>3)</sup>                                    |
| <b>Protection class</b>                | III                                                    |
| <b>Digital output</b>                  |                                                        |
| Type                                   | PNP                                                    |
| Switching mode                         | Light/dark switching                                   |
| Switching mode selector                | Selectable via light/dark rotary switch                |
| Signal voltage PNP HIGH/LOW            | $V_S - (\leq 3\text{ V}) / \text{approx. } 0\text{ V}$ |
| Output current $I_{\text{max}}$        | $\leq 100\text{ mA}$ <sup>4)</sup>                     |
| Response time                          | $< 625\text{ }\mu\text{s}$ <sup>5)</sup>               |
| Switching frequency                    | 1,000 Hz <sup>6)</sup>                                 |
| <b>Circuit protection</b>              | A <sup>7)</sup><br>B <sup>8)</sup><br>D <sup>9)</sup>  |

<sup>1)</sup> Limit values when operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not exceed or fall below  $U_V$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> At  $U_V > 24\text{ V}$ ,  $I_A \text{ max.} = 50\text{ mA}$ .

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> With light/dark ratio 1:1.

<sup>7)</sup> A =  $V_S$  connections reverse-polarity protected.

<sup>8)</sup> B = inputs and output reverse-polarity protected.

<sup>9)</sup> D = outputs overcurrent and short-circuit protected.

## Mechanical data

|                               |                                                   |
|-------------------------------|---------------------------------------------------|
| <b>Housing</b>                | Rectangular                                       |
| <b>Dimensions (W x H x D)</b> | 12 mm x 31.5 mm x 21 mm                           |
| <b>Connection</b>             | Cable with M8 male connector, 4-pin <sup>1)</sup> |
| <b>Connection detail</b>      |                                                   |
| Conductor size                | 0.14 mm <sup>2</sup>                              |
| Length of cable (L)           | 200 mm <sup>1)</sup>                              |
| <b>Material</b>               |                                                   |
| Housing                       | Plastic, ABS/PC                                   |
| Front screen                  | Plastic, PMMA                                     |
| Cable                         | PVC                                               |
| <b>Weight</b>                 | 60 g                                              |

<sup>1)</sup> Do not bend below 0 °C.

## Ambient data

|                                      |                                 |
|--------------------------------------|---------------------------------|
| <b>Enclosure rating</b>              | IP67                            |
| <b>Ambient operating temperature</b> | -25 °C ... +55 °C <sup>1)</sup> |

<sup>1)</sup> Temperature stability following adjustment  $\pm 10\text{ °C}$ .

|                              |                              |
|------------------------------|------------------------------|
| Ambient temperature, storage | -40 °C ... +70 °C            |
| UL File No.                  | NRKH.E348498 & NRKH7.E348498 |


<sup>1)</sup> Temperature stability following adjustment +/-10 °C.

Classifications

|                |          |
|----------------|----------|
| ECLASS 5.0     | 27270902 |
| ECLASS 5.1.4   | 27270902 |
| ECLASS 6.0     | 27270902 |
| ECLASS 6.2     | 27270902 |
| ECLASS 7.0     | 27270902 |
| ECLASS 8.0     | 27270902 |
| ECLASS 8.1     | 27270902 |
| ECLASS 9.0     | 27270902 |
| ECLASS 10.0    | 27270902 |
| ECLASS 11.0    | 27270902 |
| ECLASS 12.0    | 27270902 |
| ETIM 5.0       | EC002717 |
| ETIM 6.0       | EC002717 |
| ETIM 7.0       | EC002717 |
| ETIM 8.0       | EC002717 |
| UNSPSC 16.0901 | 39121528 |


Adjustments

No adjustment possibility




- ④ LED indicator green: Supply voltage active
- ⑤ LED indicator yellow: Status of received light beam

Connection type




## Connection diagram

Cd-066




## Characteristic curve

Operating reserve

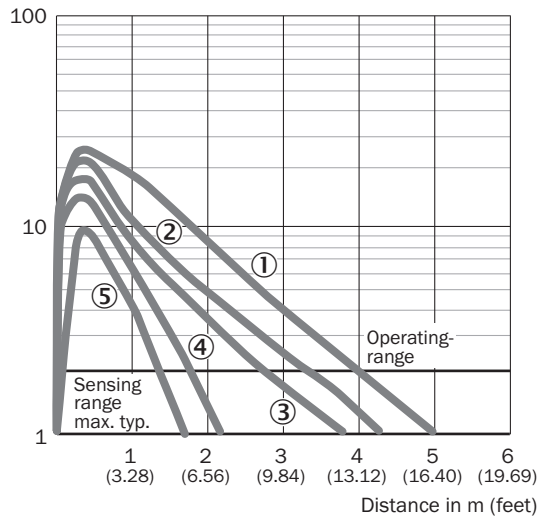


- ① Reflector PL80A
- ② Reflector PL40A
- ③ Reflector P250
- ④ Reflector PL20A
- ⑤ Reflective tape REF-IRF-56

## Light spot size

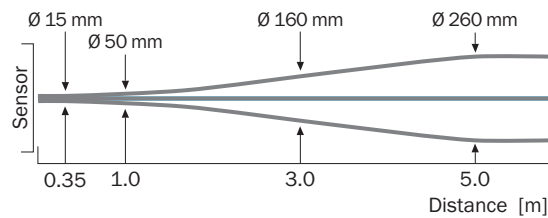


Sensing range diagram

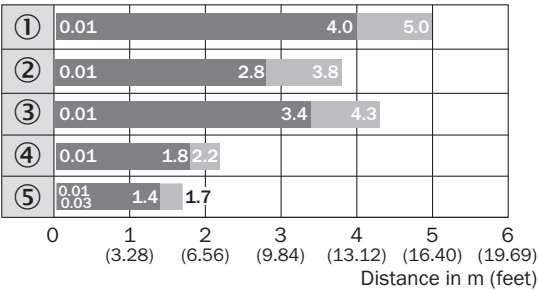

- Sensing range      ■ Sensing range max.
- ① Reflector PL80A
  - ② Reflector PL40A
  - ③ Reflector P250
  - ④ Reflector PL20A
  - ⑤ Reflective tape REF-IRF-56

Dimensional drawing (Dimensions in mm (inch))

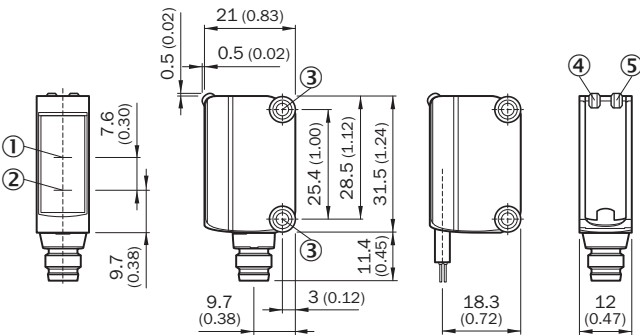

- ① Optical axis, receiver
- ② Optical axis, sender
- ③ Mounting holes M3
- ④ LED indicator green: Supply voltage active
- ⑤ LED indicator yellow: Status of received light beam

Recommended accessories

Other models and accessories → [www.sick.com/G6](http://www.sick.com/G6)

|                                                                                     | Brief description                                                                                                                                                                                                    | Type           | Part no. |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|
| Universal bar clamp systems                                                         |                                                                                                                                                                                                                      |                |          |
|  | Clamp bar to fix G6 sensors on rods of 12 mm, clamp-on design up to 4 mm wall thickness, aluminum (clamp bar), stainless steel (bracket), clamp bar mounting and clamp function, mounting bracket, mounting hardware | BEF-KHS-IS12G6 | 2086865  |
| Mounting brackets and plates                                                        |                                                                                                                                                                                                                      |                |          |
|  | Stainless steel (1.4301)                                                                                                                                                                                             | BEF-WN-G6      | 2062909  |

|                                                                                   | Brief description                                                                                                                                                                                                                                                                                                                                                                                            | Type               | Part no. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
|  | Universal mounting bracket for reflectors, steel, zinc coated                                                                                                                                                                                                                                                                                                                                                | BEF-WN-REFX        | 2064574  |
| Plug connectors and cables                                                        |                                                                                                                                                                                                                                                                                                                                                                                                              |                    |          |
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 4-wire, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with chemicals</li> </ul> | YF8U14-050VA3XLEAX | 2095889  |
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, M8, 4-pin, straight</li> <li>• <b>Description:</b> Unshielded</li> <li>• <b>Connection systems:</b> Screw-type terminals</li> <li>• <b>Permitted cross-section:</b> 0.14 mm<sup>2</sup> ... 0.5 mm<sup>2</sup></li> </ul>                                                                                            | STE-0804-G         | 6037323  |
| Reflectors                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                              |                    |          |
|  | Rectangular, screw connection, 51 mm x 61 mm, PMMA/ABS, Screw-on, 2 hole mounting                                                                                                                                                                                                                                                                                                                            | P250               | 5304812  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)