

Features

- High energy density
- High voltage, stable during most of the applications lifetime
- Wide range of operating temperature (-55°C to +85°C)
- Long storage life
- Low self-discharge rate 1% per year at 20°C

**RoHS
Compliant**

Applications


- Intelligent Instrument and meter
- Memory and standby power
- Alarms and security devices
- Automotive electronics
- Electronic toll collection
- Military devices

Specification

Nominal capacity (1.3mA - 2V)	: 3.6Ah
Nominal voltage	: 3.6V
Maximum recommended continuous current	: 70mA
Maximum recommended pulse current	: 150mA
Typical weight	: 24g
Operating temperature range	: -55°C to +85°C

Note: (150mA, 0.1 second pulses every 2 minutes, at 25°C from undischarged cells with 5uA base current, yield voltage readings above 2.7V, the value may vary according to the pulse characteristics, the temperature and the cell's previous history)


Diagram

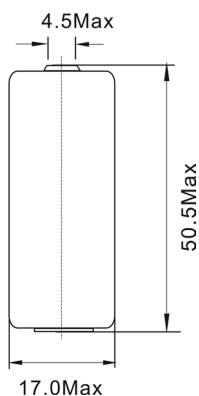


Warning

- Fire, explosion, and burn hazard
- Do not recharge, short circuit, overdischarge,
- crush, disassemble, heat above 100 incinerate
- Do not use the battery beyond permitted temperature range


Discharge Characteristics at 23°C

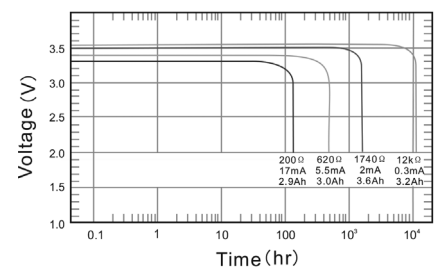

Capacity VS. Current

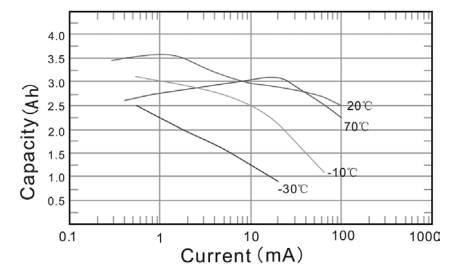

Voltage VS. Temperature

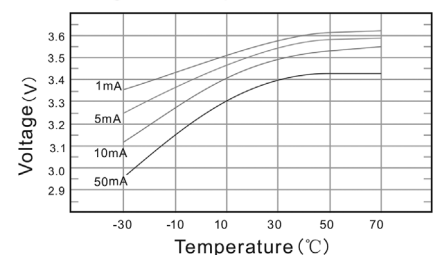

Part Number Table

Description	Part Number
Lithium Thionyl Chloride High Energy	MP013864

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.