

MBC401 Series

400 W AC-DC Power Supplies



The MBC401 Series of AC-DC power supplies provides up to 400 W of regulated output power through wide input voltage range 90 – 264 VAC in single outputs of 12, 24, 28, 36 or 48 VDC.

The MBC401 Series comes in five different low-profile packages, offering 12 and 5 VSB standby outputs and a full set of protection features. Available control signals include Power Good (P_OK), Remote On/Off (PS_ON) and remote sense compensation on the (+) load line.

The MBC401 Series complies with the latest international safety standards for medical equipment, offers 2xMoPP means of patient protection, is suitable for BF rated applied parts and displays the CE-Mark for the European Low Voltage Directive (LVD).

Key Features & Benefits

- Universal input voltage range (90 – 264 VAC)
- Active PFC, EN 61000-3-2 Class C compliant
- 400 W rated output power (440 W peak)
- High efficiency (94% typical)
- Low stand by power consumption (<0.5 W)
- 12, 24, 28, 36, 48 VDC standard output voltages
- +5V stand by, 2 A and 12 V auxiliary, 1 A outputs
- Low earth leakage current
- Fan speed control function (Off at <50 W)
- Over temperature protection
- Over current and short circuit protection
- Remote On/Off and power good signal
- 5 available packages all fit 1U installation
- IEC/EN 60601-1 3rd ed. compliant
- ANSI/AAMI ES60601-1 3rd ed. compliant
- 4000 m operation without de-rating

Applications

- Diagnostic equipment
- Imaging equipment
- Respiratory devices
- Therapy appliances
- Dental equipment
- Dermatology aesthetic medicine



bel POWER
SOLUTIONS &
PROTECTION
a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL NUMBER	PACKAGE & COOLING	INPUT VOLTAGE RANGE [VAC]	NOM. OUTPUT VOLTAGE [VDC]	MAX. OUTPUT POWER [W]	MAX. OUTPUT CURRENT [A]	DIMENSIONS
MBC401-1012	Open Frame Convection / Forced Air	90 - 264	12	400	33.3	76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in)
MBC401-1012-UC	U-Chassis Convection / Forced Air	90 - 264	12	400	33.3	84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
MBC401-1012-PC	Perforated Cover Convection / Forced Air	90 - 264	12	400	33.3	84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in)
MBC401-1012-T	Vented Cover Top Fan	90 - 264	12	400	33.3	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1012-S	Enclosed Front Mounted Fan	90 - 264	12	400	33.3	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1024	Open Frame Convection / Forced Air	90 - 264	24	400	16.7	76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in)
MBC401-1024-UC	U-Chassis Convection / Forced Air	90 - 264	24	400	16.7	84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
MBC401-1024-PC	Perforated Cover Convection / Forced Air	90 - 264	24	400	16.7	84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in)
MBC401-1024-T	Vented Cover Top Fan	90 - 264	24	400	16.7	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1024-S	Enclosed Front Mounted Fan	90 - 264	24	400	16.7	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1028-UC	U-Chassis Convection / Forced Air	90 - 264	28	400	14.3	84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
MBC401-1036	Open Frame Convection / Forced Air	90 - 264	36	400	11.1	76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in)
MBC401-1036-UC	U-Chassis Convection / Forced Air	90 - 264	36	400	11.1	84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
MBC401-1036-PC	Perforated Cover Convection / Forced Air	90 - 264	36	400	11.1	84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in)
MBC401-1036-T	Vented Cover Top Fan	90 - 264	36	400	11.1	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1036-S	Enclosed Front Mounted Fan	90 - 264	36	400	11.1	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1048	Open Frame Convection / Forced Air	90 - 264	48	400	8.3	76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in)
MBC401-1048-UC	U-Chassis Convection / Forced Air	90 - 264	48	400	8.3	84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
MBC401-1048-PC	Perforated Cover Convection / Forced Air	90 - 264	48	400	8.3	84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in)
MBC401-1048-T	Vented Cover Top Fan	90 - 264	48	400	8.3	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
MBC401-1048-S	Enclosed Front Mounted Fan	90 - 264	48	400	8.3	84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)

2. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
AC Input Voltage	PS starts and operates at 90 V _{AC} at all load conditions	90	100-240	264	V _{RMS}
DC Input Voltage		170	-	270	V _{DC}
Input Frequency		47	50/60	440	Hz
Input Current	RMS at 180 V _{AC} , maximum load, 50 / 60 Hz RMS at 90 V _{AC} , maximum load, 50 / 60 Hz	-	-	2.5 5.0	A
Inrush Current	265 V _{AC} , 25 °C ambient, cold start. 24, 28, 36, 48 V, no damage 12 V	- -	- -	- 20	A
Fusing	2x Time Lag 6.3 A, 250 V on both L and N	-	-	6.3	A
Efficiency	At 115 V _{AC}				
	20% rated load	90	-	-	
	50 – 100 % rated load	92	-	-	%
	At 230 V _{AC}				
	20% rated load	90	-	-	
	50 – 100 % rated load	94	-	-	
Input Power Consumption	Power on, 115-230 V _{RMS} , no load	-	1	1.5	W
	Stand by, 115-230 V _{RMS} , no load	-	0.4	0.5	
Power Factor	At full rated load, 115 VAC, 60 Hz and 230 VAC, 50 Hz input voltages	0.95	-	-	-
Harmonic Current Fluctuations and Flicker	Complies with EN-61000-3-2 Class C at 230 V _{AC} 50 Hz, load >50 W. Complies with EN-61000-3-3 at nominal voltages and full load.				
Leakage Current	Normal conditions, 240 V _{RMS} , 60 Hz.			300	μA

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION		MIN	NOM	MAX	UNIT
V1 Output Voltage	0.5% set point accuracy for all voltage variants		-	12	-	V
			-	24	-	
			-	28	-	
			-	36	-	
			-	48	-	
V1 Output Power Rating	All voltages, convection cooled models only				250	W
	All voltages, fan cooled + forced air cooled (> 400 LFM) models				400	
	All models, peak power (≤ 10 s)				440	
V1 Output Current	* Fan cooled + forced air cooled (> 400 LFM) (All models)	V1: 12 V _{DC}			33.3	A
		V1: 24 V _{DC}			16.7	
		V1: 28 V _{DC}			14.3	
		V1: 36 V _{DC}			11.1	
		V1: 48 V _{DC}			8.3	
V1 Output Current	** Convection cooled: ((-), -UC, -PC models)	V1: 12 V _{DC}			20.8	A
		V1: 24 V _{DC}			10.4	
		V1: 28 V _{DC}			8.9	
		V1: 36 V _{DC}			6.9	
		V1: 48 V _{DC}			5.2	
V1 Voltage Adjustment Range		-	-	±5	%V1	
V1 Load-Line-Cross Regulation	V _{AC} : 90 – 264 V _{RMS}	V1 Load: 0 – 33.3 A (12 V) 0 – 16.7 A (24 V) 0 – 14.3 A (28 V) 0 – 13.9 A (36 V) 0 – 8.3 A (48 V) V2 Load: 0 – 1 A 5V _{SB} Load: 0 – 2 A	-	-	±2	%V1
V1 Line Regulation		V _{AC} : 90 – 264 V _{RMS}	-	-	±0.1	%V1
Transient Response (Voltage Deviation) V1, 5V _{SB}	25% load changes at 1 A/μs 12V at 2200 μF Load / I _{OUT} > 0.5 A 24 V at 1000 μF Load / I _{OUT} > 0.5 A 28 V at 1000 μF Load / I _{OUT} > 0.5 A 36 V at 820 μF Load / I _{OUT} > 0.5 A 48V at 560 μF Load / I _{OUT} > 0.5 A 5V _{SB} at 560 μF Load / I _{OUT} > 0.1 A		-	-	±5	%V1 %5V _{SB}
V1 Ripple and Noise		All models, Peak-to-peak, 20 MHz BW. 100 nF ceramic and 10 μF tantalum caps at the load.	-	-	1	%V1
Start-up Rise Time		90<V _{IN} <264, any load conditions.	5	-	85	ms
Start-up Delay	V1 in regulation after PS_ON is asserted				200	ms
	V1 in regulation after AC is applied 5V _{SB} in regulation after AC is applied		-	-	750 500	
Turn-on Overshoot	At I1 = 500 mA, V1 in regulation within 50 ms.		-	10	-	%V1
			-	10	-	%V2
			-	10	-	%V _{SB}
Hold-up Time	At nominal V _{IN} , 400 W, for all models	-	16	-	ms	
	At nominal V _{IN} , 365 W, for all models	-	20	-		
	At nominal V _{IN} , 200 W, for all models	-	35	-		
Minimum Load ***		All models; V1, V2 and 5 V _{SB}	0	-	-	A
Maximum Load Capacitance	At nominal V _{IN} , 25 °C ambient	12 V	-	-	33000	μF
		24 V	-	-	16000	
		28 V	-	-	14300	
		36 V	-	-	10000	
		48 V	-	-	7000	
Temperature Drift			-1.2	-	+1.2	mV/°C
V2 Output Voltage ***		All models. Load on V2: from 5 to 1000 mA Load on V1: from 0.1 to I1 rated	11.35	11.5	12.65	V
V2 Output Current (I2)		Convection / forced air cooling	-	-	1	A
V2 Ripple		Peak-to-Peak measured at 20 MHz Bandwidth.	-	-	240	mV

5V _{SB} Output Voltage	3% set point accuracy	-	5	-	V
5V _{SB} Output Current (I5V _{SB})	Convection cooled models	-	-	1.5	A
	Fan cooled + forced air cooled (> 400 LFM) models	-	-	2	
5V _{SB} Load-Line-Cross regulation	V _{AC} : 90 – 264 V _{RMS}	V1 Load: 0 – 33.3 A (12 V)	-	-	±5 %5V _{SB}
		0 – 16.7 A (24 V)			
		0 – 14.3 A (28 V)			
		0 – 13.9 A (36 V)			
5V _{SB} Load-Line-Cross regulation	V _{AC} : 90 – 264 V _{RMS}	0 – 8.3 A (48 V)	-	-	±5 %5V _{SB}
		V2 Load: 0 – 1 A			
		5V _{SB} Load: 0 – 2 A			
5V _{SB} Ripple	Peak-to-Peak measured at 20 MHz Bandwidth.	-	-	50	mV

* The combined output power of V1, V2 and 5V_{SB} for -T and -S models, must not exceed 400 W up to 50 °C, and 280 W at 70 °C ambient temperature. See de-rating curves below.

** The combined output power of V1, V2 and 5V_{SB} for (-), -UC, -PC models, must not exceed 400 W when cooled by 400 LFM air flow, and 250 W when natural convection cooled, up to 50 °C. Above 50 °C output de-rating applies. See de-rating curves below. In any case, the heat sink maximum temperature should not exceed +110 °C at 50 °C ambient temperature.

*** When the load on the main output is less than 100 mA, V2 output voltage might regulate below its minimum value. Contact Bel for details.

3.1 OUTPUT POWER DE-RATING CURVES

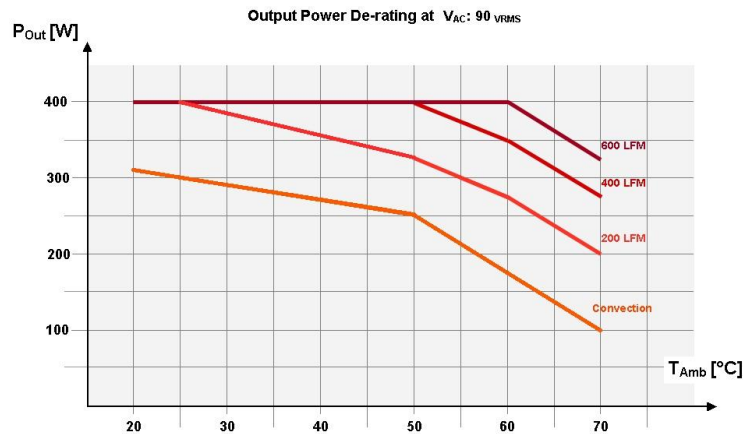


Figure 1. Power Derating Curves for Open Frame, U-Chassis and Perforated Cover Models


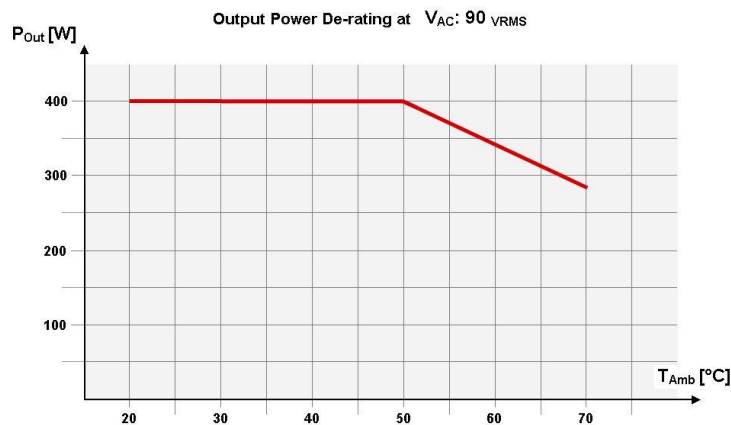


Figure 2. Power Derating Curves for Top Fan and Front Mounted Fan Models

4. SIGNALS, CONTROLS & TIMING SPECIFICATIONS


Base signals and controls are accessible from signal connector P204.

SIGNAL	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
PS_ON	Active low, +5 V TTL signal compatible. Input low voltage	0	-	2.0	V
	Input high voltage ($I_{IN} = 200 \mu A$)	3.0	-	-	V
	V1 and V2 disabled when PS_ON is open				
	5 V _{SB} not affected by PS_ON				
	V1 and V2 enabled with PS_ON connected to RTN				
P_OK	+5 V TTL compatible				
	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (100 μA sourcing)	2.4	-	5	V
	Low to high time after V1 in regulation	0.05	-	0.1	s
	Power down warning time	1	-	-	ms
5V_{SB} output	Active and in regulation after a $90 < V_{AC} < 264$ is applied	-	-	200	ms
	5 V _{SB} not affected by PS_ON				

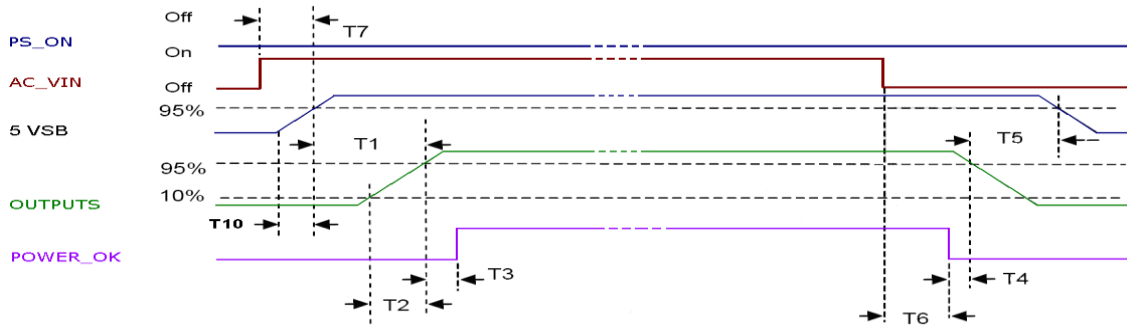

Above waveforms are expected with AC Input ON/OFF:

Standby on - Main outputs on	$50 \text{ ms} \leq T1 \leq 250 \text{ ms}$
Main output Rise Time	$5 \text{ ms} \leq T2 \leq 85 \text{ ms}$
5 VSB rise time	$4 \text{ ms} \leq T10 \leq 20 \text{ ms}$
Main outputs On – P_OK delay	$40 \text{ ms} \leq T3 \leq 100 \text{ ms}$
Power down warning ¹	$T4 \geq 1 \text{ ms}$
Main Output off – Standby off ²	$T5 \geq 1.2 \text{ s}$
Hold-up time (AC off – P_OK low)	$T6 \geq 15 \text{ ms (115/ 230 VAC)}$
AC_ON - Standby turn on time	$T7 \leq 500 \text{ ms}$

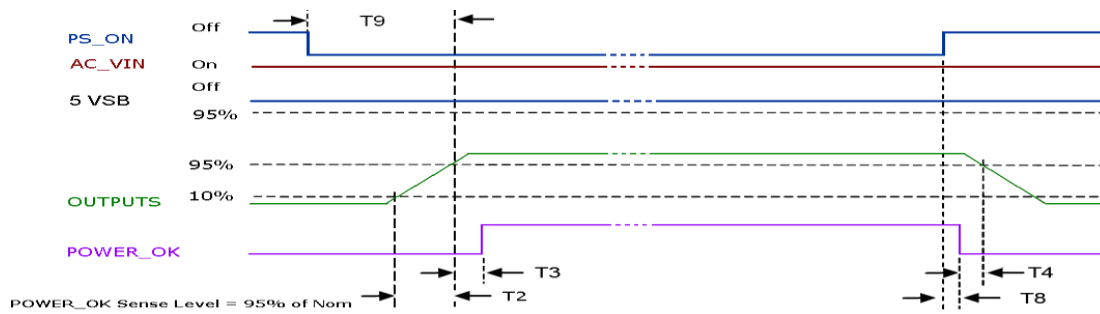

Above waveforms are expected with PS_ON Signal ON/OFF state change:

Main Output Rise Time	$5 \text{ ms} \leq T2 \leq 85 \text{ ms}$
Main Outputs on – P_OK delay	$50 \text{ ms} \leq T3 \leq 100 \text{ ms}$
Power down warning ¹	$1 \text{ ms} \leq T4 \leq 5 \text{ ms}$
PS_ON - Main Output (off) Timing	$T8 \leq 1 \text{ ms}$
PS_ON - Main Output (on) Timin	$T9 \leq 200 \text{ ms}$

¹ T4 parameter measurement setup will assume at least 10% of the maximum load on each output.

² T5 parameter measurement setup will assume at least 50% of the maximum load on main output.

5. PROTECTION SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Input Under Voltage Lockout	Auto recovery, Hiccup Mode	60	75	-	V _{AC}
Input Fuse	2x Time Lag 6.3 A, 250 V on L1 and L2	-	-	6.3	A
Over Current	At nominal input voltages. V1: Hiccup mode, auto-recovering. V2: PTC limiting, auto-recovering. 5 V _{SB} : Hiccup mode, auto-recovering.	110	-	150	%I _{MAX}
Short Circuit	At nominal input voltages. V1: Hiccup mode, auto-recovering. V2: PTC limiting, auto-recovering 5 V _{SB} : Hiccup mode, auto-recovering.	-	-	-	
Over Voltage	12 V 24 V 28 V 36 V 48 V 5 V _{SB}	110	-	136	%V _{NOM}
	Unit shut down and latch off				
Over Temperature (on primary stage)	Shut down, latch off.	-	-	-	
Over Temperature (on secondary side)	Hiccup mode, auto-recovering.	-	-	-	
Isolation Primary-to- Secondary	Reinforced (2x MoPP)	4000	-	-	V _{AC}
Isolation Input-to-PE	Basic (1x MoPP)	1500	-	-	V _{AC}
Isolation V1-to-V2		100	-	-	V _{DC}
Isolation Output-to-PE	Basic (1x MoPP)	1500	-	-	V _{AC}
Touch Current	Normal Condition (NC) Single Fault Condition (SFC)	- -	- -	100 500	μA

6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Operating Temperature Range	No de-rating up to 50 °C PS starts up at -30 °C	-20	-	50	°C
De-rated Operating Temperature Range	Natural convection cooling: Linearly de-rate from 250 W at 50 °C, to 100 W at 70 °C Forced air cooling: Linearly de-rate from 400 W at 50 °C, to 280 W at 70 °C. See graphs below.	-	-	70	°C
Storage Temperature Range		-40	-	85	°C
Humidity	RH, Non-condensing Operating Non-operating	-	-	90 95	% %
Operating Altitude		-	-	4000	m
Shock	EN 60068-2-27 Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration	EN 60068-2-64 Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g ² /Hz, 1 g _{RMS} , 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 g _{RMS} (0.0122 g ² /Hz), 3 axes, 30 min.				
MTBF	Full Load, 120 V _{AC} , 40 °C ambient 80% Duty cycle, Telcordia SR-332 Issue 2	400000	-	-	Hours
Useful Life	Low line range, 200 W, 40 °C ambient, natural convention.	-	4	-	Years
Thermal Considerations	The output power de-rating curves are herein provided. These curves can be used as a guideline to assess the limit in performance of a power supply once installed in a system providing controlled air flow at a certain input voltage and ambient temperature.				

7. ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

PARAMETER	DESCRIPTION / CONDITION	STANDARD	PERFORMANCE CLASS
Conducted	115 V _{RMS} , 230 V _{RMS} . Maximum load 4 dB minimum margin	EN 60601-1-2 (Medical)	B
Radiated	At 10 m distance (-T, -S models)	EN 60601-1-2 (Medical)	B
Line Voltage Fluctuation and Flicker	At 20%, 50% and 100% maximum load Nominal input voltages	EN 61000-3-3	
Harmonic Current Emission	Nominal input voltages Output load > 50 W	EN 61000-3-2	C

8. ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

PARAMETER	DESCRIPTION / CONDITION	STANDARD	TEST LEVEL	CRITERIA
	Reference standard for the medical version	EN 60601-1-2, 4 th edition		
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	3 V/m, 80-1000 MHz, 1 KHz / 2 Hz 80% AM. Dwell time is 3 sec for 2 Hz modulation Dwell time is 1 sec for 1 kHz modulation	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port for 1 minute; ±1 kV on signal/control lines	EN 61000-4-4	3	A
Surge	±2 kV line to line; ± 4 kV line to earth on AC power port	EN 61000-4-5	4	A B
Conducted RF Immunity	3 V _{RMS} , 0.15-80 MHz, 1 KHz/2 Hz 80% AM	EN 61000-4-6	3	A
Dips and Interruptions	Dip to 30% for 0.5 cycle (10 ms)	EN61000-4-11		A
	Dip to 40% for 5 cycles (100 ms)	EN61000-4-11		B
	Dip to 70% for 25 cycles (500 ms)	EN61000-4-11		B
	Drop-out to 5% for 10 ms	EN61000-4-11		B
	Interrupts > 95% for 5 s	EN61000-4-11		B

9. SAFETY AGENCIES APPROVALS

CERTIFICATION BODY	SAFETY STANDARDS	CATEGORY
CSA/UL	CSA C22.2 No.60601-1, ANSI/AAMI ES60601-1 3rd Edition + A1	Medical
IEC IECEE CB Certification	IEC/EN 60601-1 3rd edition+A1	Medical
CE	Directive 93/42/CEE: Safety Requirement of the Medical Device Directive 2014/30/EU: Electromagnetic Compatibility (EMC) Directive EU 2015/863: RoHS 3 Designed to meet IEC/EN/UL/CSA 61010-1 2nd edition	Medical


10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	410 g (0.90 lb) 525 g (1.16 lb) – UC model 575 g (1.43 lb) – PC model 670 g (1.48 lb) – T model 525 g (1.16 lb) – S model
Overall Dimensions	76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in) 84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in) – UC model 84.4 x 170.5 x 41.0 mm (3.32 x 6.71 x 1.61 in) – PC model 84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in) – T model 84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in) – S model

10.1 OUTLINE DRAWING & CONNECTIONS – OPEN FRAME MODEL


Overall Dimensions: 76.0 x 164.2 x 37.7 mm (2.99 x 6.46 x 1.48 in)

Weight: 410 g (0.90 lb)

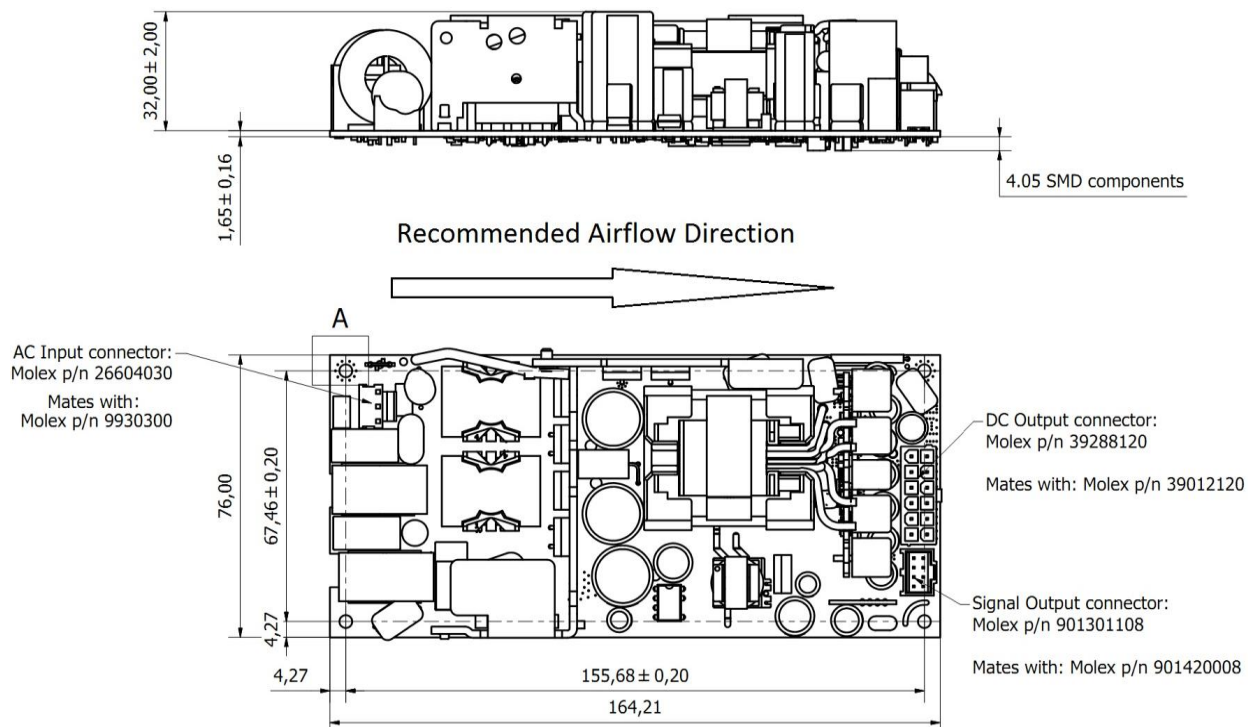


10.2 OUTLINE DRAWING & CONNECTIONS – U-CHASSIS MODEL (-UC)

Overall Dimensions: 84.4 x 166.5 x 40.0 mm (3.32 x 6.55 x 1.57 in)
 Weight: 525 g (1.16 lb)

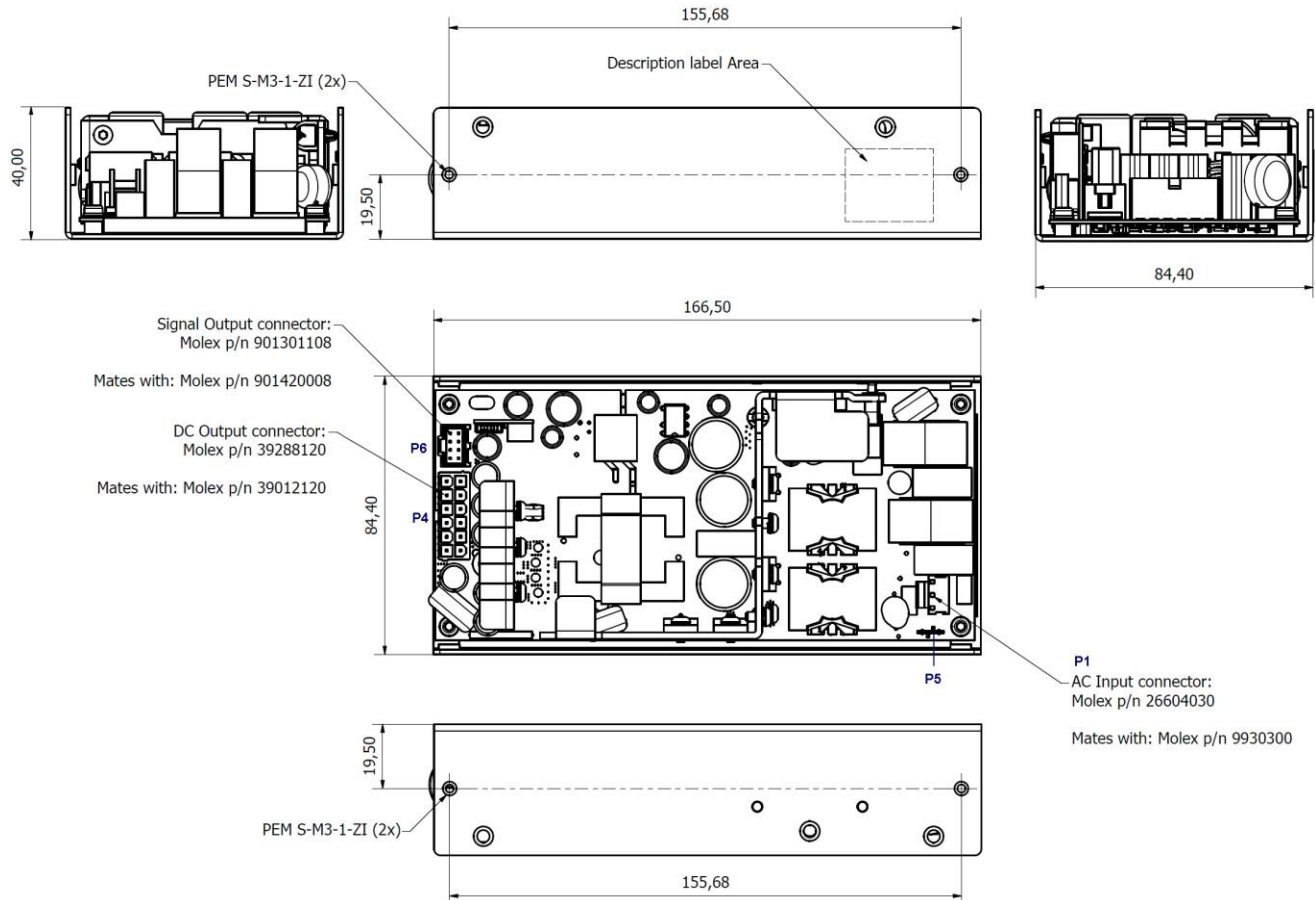


10.3 OUTLINE DRAWING & CONNECTIONS – PERFORATED MODEL (-PC)

Overall Dimensions: 84.4 x 170.5 x 41.0 mm (3.32 x 6.71 x 1.61 in)
Weight: 575 g (1.43 lb)

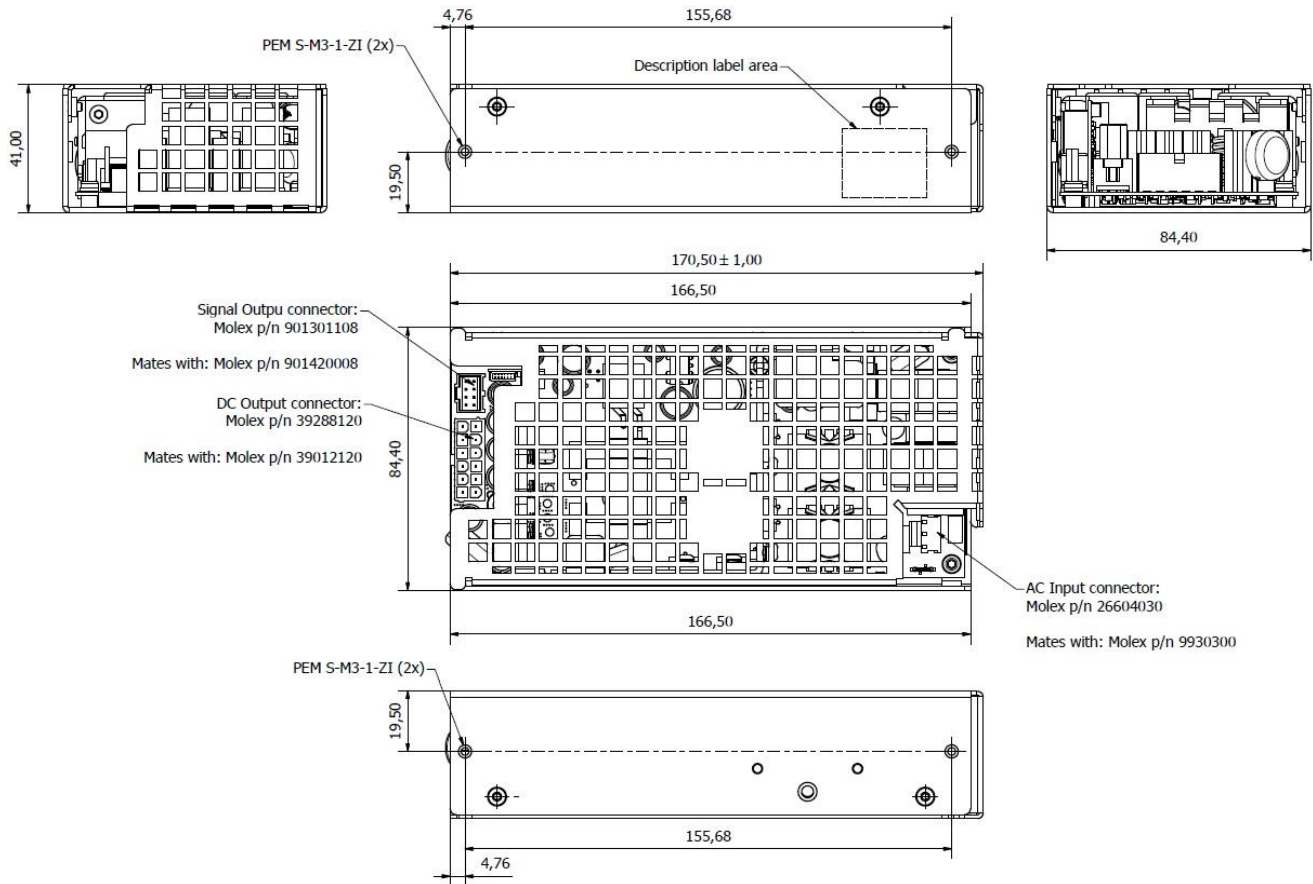


10.4 OUTLINE DRAWING & CONNECTIONS– VENTED COVER MODEL (-T)

Overall Dimensions: 84.4 x 166.5 x 41.0 mm (3.32 x 6.55 x 1.61 in)
Weight: 670 g (1.48 lb)

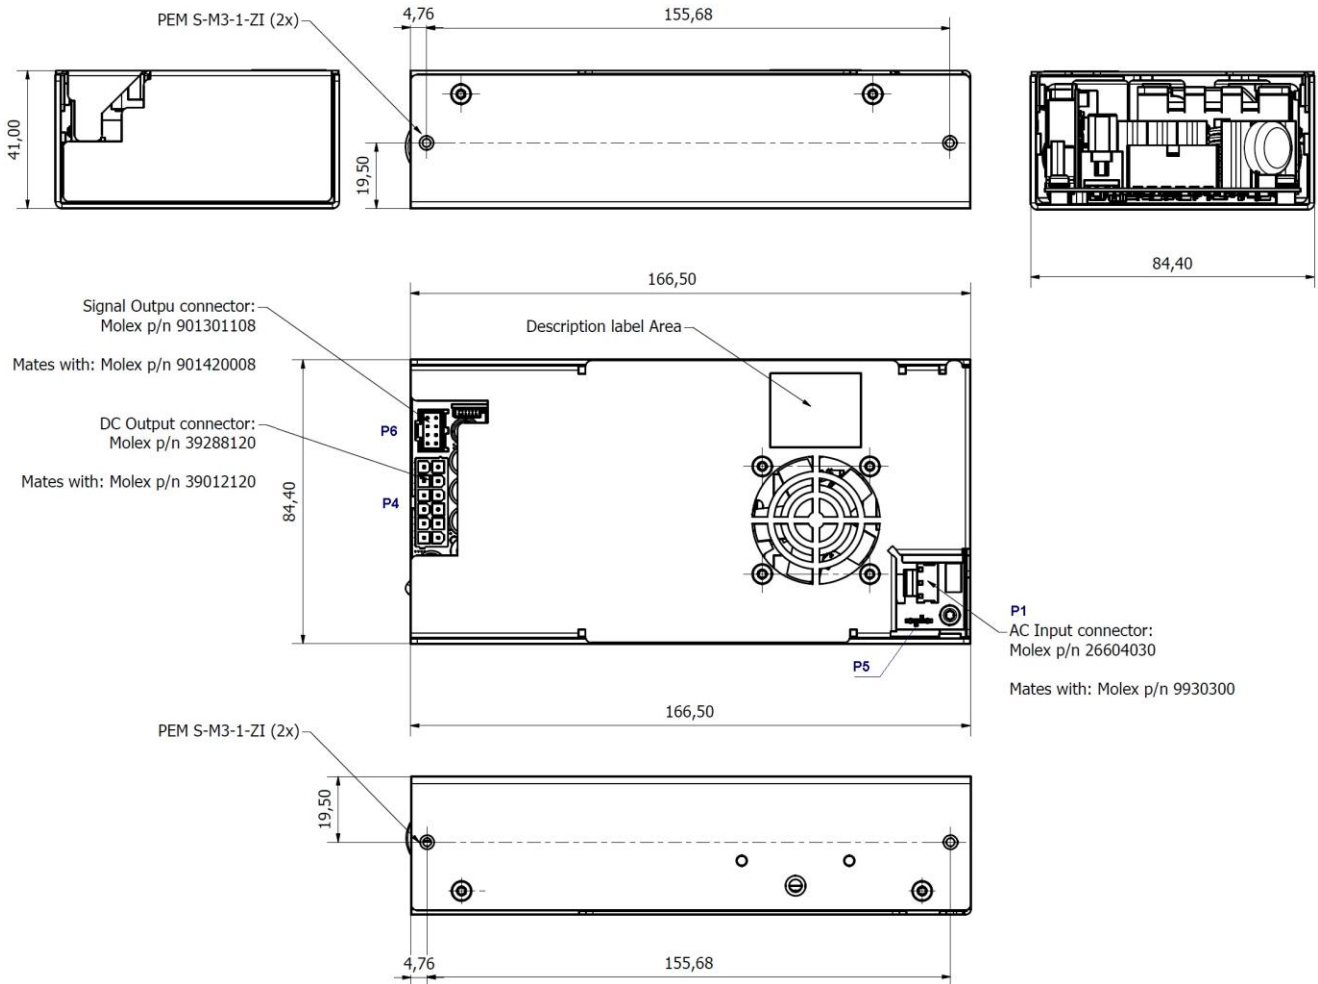

10.5 OUTLINE DRAWING & CONNECTIONS– FRONT FAN MODEL (-S)

Overall Dimensions: 84.4 x 183.0 x 41.0 mm (3.32 x 7.20 x 1.61 in)
Weight: 625 g (1.416lb)

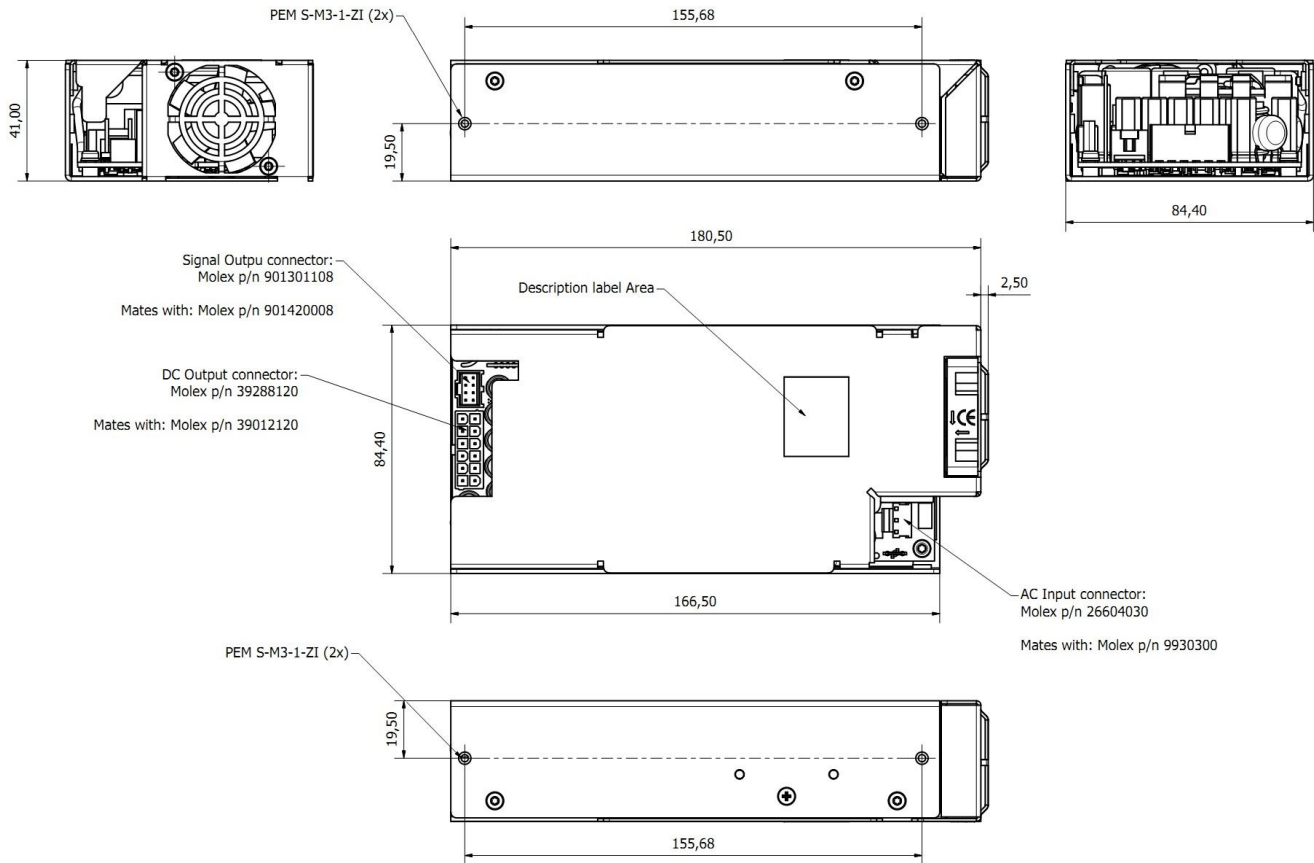

11. CONNECTIONS AND PIN DESCRIPTION

AC INPUT CONNECTOR – P1


Molex 26-60-4030 or equivalent

Mating Connector:
Molex 09-93-0300 (Crimp Terminal Housing)
Molex 08-50-0105 (Crimp Terminal, 18-24 AWG)

PROTECTION EARTH CONNECTOR - P5

Tyco 63849-1 equivalent

Mating Connector:
Any tin finished 6.35 x 0.81 mm receptacle



PIN REF.	FUNCTION
1	Line 1
2	Not Present
3	Line 2

PIN REF.	FUNCTION
GDN	AC Ground

DC OUTPUT CONNECTOR – P4


Molex 39-28-8120 or equivalent

Mating Connector:
Molex 39-01-2120 (Crimp Terminal Housing)
Molex 39-00-0039 (Crimp Terminal, 18-24 AWG)

SIGNAL CONNECTOR – P6

Molex 90130-1108 or equivalent

Mating Connector
Molex 90142-0008 (Crimp Terminal Housing)
Molex 90119-0109 (Crimp Terminal, 22-24 AWG)

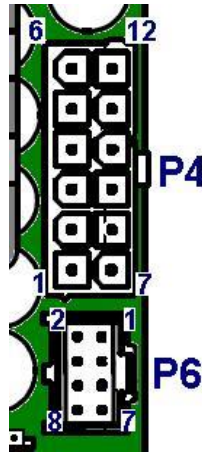

PIN REF.	FUNCTION
1 – 6	V1
7 – 12	DC Return

PIN REF.	FUNCTION
1	+5V _{SB}
2	P_OK
3	-V2
4	PS_ON
5	RS+
6	RTN
7	+V2
8	RTN

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.