

## Barrier Blocks Series 141

.438 Density, 6-32 x 1/4"  
BH Screw, Open Bottom,  
Double Row

# Cinch

### Electrical Characteristics

**Voltage Rating:** 250 VAC RMS maximum

**Current Rating:** 20 Amps maximum



**Maximum Watts Per Terminal:** 5000

### Mechanical Characteristics

**Maximum Wire Size:** #14 AWG

**Recommended Tightening Torque:** 12 lb.-in.

### Dimensions

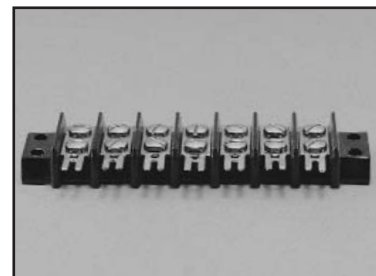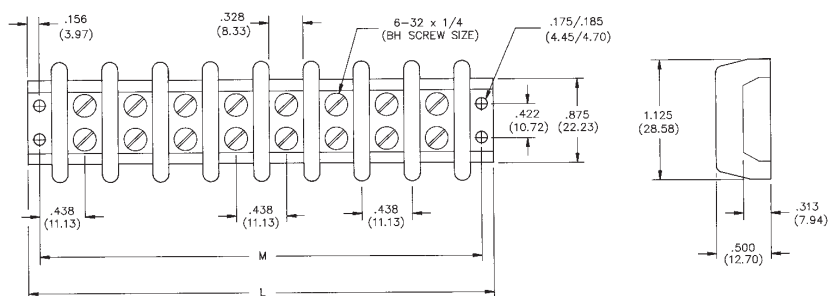

### Ordering Information

| No. of<br>Terminals | Standard Screw<br>Catalog No. | "M"<br>Dim. | "L"<br>Dim. |
|---------------------|-------------------------------|-------------|-------------|
| 1                   | 1-141                         | .875        | 1.187       |
| 2                   | 2-141                         | 1.312       | 1.625       |
| 3                   | 3-141                         | 1.750       | 2.062       |
| 4                   | 4-141                         | 2.187       | 2.500       |
| 5                   | 5-141                         | 2.625       | 2.938       |
| 6                   | 6-141                         | 3.062       | 3.375       |
| 7                   | 7-141                         | 3.500       | 3.812       |
| 8                   | 8-141                         | 3.938       | 4.250       |
| 9                   | 9-141                         | 4.375       | 4.687       |
| 10                  | 10-141                        | 4.813       | 5.125       |
| 11                  | 11-141                        | 5.250       | 5.562       |
| 12                  | 12-141                        | 5.687       | 6.000       |
| 13                  | 13-141                        | 6.125       | 6.437       |
| 14                  | 14-141                        | 6.562       | 6.875       |
| 15                  | 15-141                        | 7.000       | 7.312       |
| 16                  | 16-141                        | 7.437       | 7.750       |
| 17                  | 17-141                        | 7.875       | 8.187       |
| 18                  | 18-141                        | 8.312       | 8.625       |
| 19                  | 19-141                        | 8.750       | 9.062       |
| 20                  | 20-141                        | 9.187       | 9.500       |

Marketed exclusively through distribution.

**Barrier Blocks**  
**Series 141**


.438 Density, 6-32 x 1/4"  
BH Screw, Open Bottom,  
Double Row




**Solder Terminal Options**

**Dimensions**


"Y" Terminals



"3/4W" Terminals



"W" Terminals



**Ordering Information**

| No. of Terminals | Catalog No. | Catalog No. | Catalog No. |
|------------------|-------------|-------------|-------------|
| 1                | 1-141-Y     | 1-141-3/4W  | 1-141-W     |
| 2                | 2-141-Y     | 2-141-3/4W  | 2-141-W     |
| 3                | 3-141-Y     | 3-141-3/4W  | 3-141-W     |
| 4                | 4-141-Y     | 4-141-3/4W  | 4-141-W     |
| 5                | 5-141-Y     | 5-141-3/4W  | 5-141-W     |
| 6                | 6-141-Y     | 6-141-3/4W  | 6-141-W     |
| 7                | 7-141-Y     | 7-141-3/4W  | 7-141-W     |
| 8                | 8-141-Y     | 8-141-3/4W  | 8-141-W     |
| 9                | 9-141-Y     | 9-141-3/4W  | 9-141-W     |
| 10               | 10-141-Y    | 10-141-3/4W | 10-141-W    |
| 11               | 11-141-Y    | 11-141-3/4W | 11-141-W    |
| 12               | 12-141-Y    | 12-141-3/4W | 12-141-W    |
| 13               | 13-141-Y    | 13-141-3/4W | 13-141-W    |
| 14               | 14-141-Y    | 14-141-3/4W | 14-141-W    |
| 15               | 15-141-Y    | 15-141-3/4W | 15-141-W    |
| 16               | 16-141-Y    | 16-141-3/4W | 16-141-W    |
| 17               | 17-141-Y    | 17-141-3/4W | 17-141-W    |
| 18               | 18-141-Y    | 18-141-3/4W | 18-141-W    |
| 19               | 19-141-Y    | 19-141-3/4W | 19-141-W    |
| 20               | 20-141-Y    | 20-141-3/4W | 20-141-W    |

Solder Terminals can be ordered separately.

**Terminal Type**

"Y"  
"3/4W"  
"W"

**Catalog No.**

Y-141  
3/4W-141  
W-141

Marketed exclusively through distribution.

Barrier Blocks  
Series 141


.438 Density, 6-32 x 1/4"  
BH Screw, Open Bottom,  
Double Row




Marker Strips

Dimensions

Standard

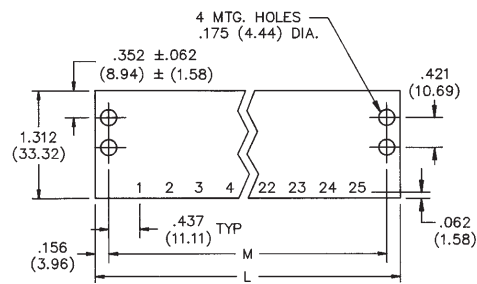

“Y” Terminal

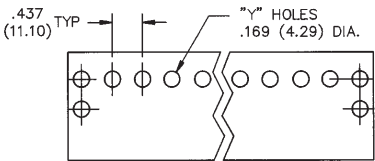

Ordering Information

| No. of<br>Terminals | Catalog No. | Catalog No. |
|---------------------|-------------|-------------|
| 1                   | MS-1-141    | MS-1-141-Y  |
| 2                   | MS-2-141    | MS-2-141-Y  |
| 3                   | MS-3-141    | MS-3-141-Y  |
| 4                   | MS-4-141    | MS-4-141-Y  |
| 5                   | MS-5-141    | MS-5-141-Y  |
| 6                   | MS-6-141    | MS-6-141-Y  |
| 7                   | MS-7-141    | MS-7-141-Y  |
| 8                   | MS-8-141    | MS-8-141-Y  |
| 9                   | MS-9-141    | MS-9-141-Y  |
| 10                  | MS-10-141   | MS-10-141-Y |
| 11                  | MS-11-141   | MS-11-141-Y |
| 12                  | MS-12-141   | MS-12-141-Y |
| 13                  | MS-13-141   | MS-13-141-Y |
| 14                  | MS-14-141   | MS-14-141-Y |
| 15                  | MS-15-141   | MS-15-141-Y |
| 16                  | MS-16-141   | MS-16-141-Y |
| 17                  | MS-17-141   | MS-17-141-Y |
| 18                  | MS-18-141   | MS-18-141-Y |
| 19                  | MS-19-141   | MS-19-141-Y |
| 20                  | MS-20-141   | MS-20-141-Y |

Use Standard Marker Strip for “3/4W” and “W” Solder Terminals.

Accessories

- Jumpers
- Fanning Strips

Marketed exclusively through distribution.