


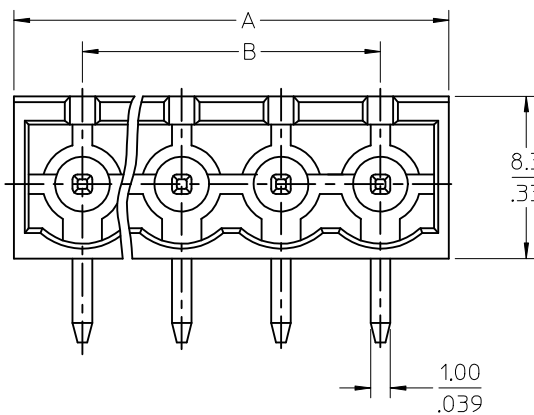
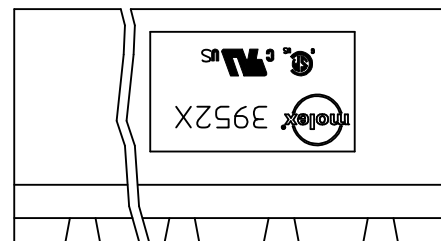


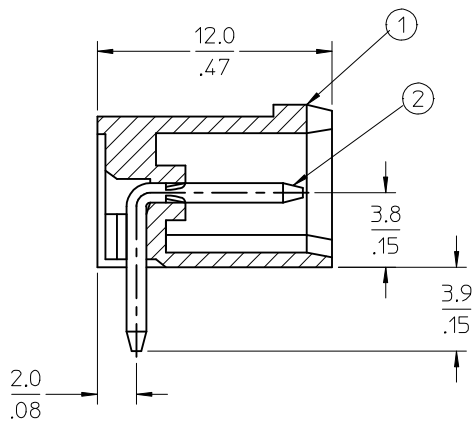

SPECIFICATIONS:

- Material:
 - Body: PA66
 - Pin: Brass
- Wire range: N/A
- Electrical rating: 300V, 15A.
- Wire strip length: N/A
- Operating temperature: -40C to +105C.
- Max torque: N/A
- Insulation resistance: DC 500V, 500M.
- Dielectric withstand: AC 2500V for 1 minute.
- Breakdown voltage: 4000V.
- $A = (N \times P) + 2.0\text{mm}$
- $B = (N - 1) \times P$
- $P \text{ (PITCH)} = 5.0\text{mm} (.197")$.
- $N = \text{Number of positions available 2 through 24.}$

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

REVISED DOC TOL EC NO: IPG2017-0881 DRAWN: ANAGATH 2017/03/24 CHKD: APPR: BRUPERT 2017/04/18 REV A1	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY LROTHAUS	DATE 12/6/05	TITLE 5.0MM, EURO HEADER, RIGHT ANGLE	
			4 PLACES	±---	±---	CHECKED BY C. YORK	DATE 01/06/06		
			3 PLACES	±---	±---				
			2 PLACES	±---	±---				
	1 PLACE	±---	±---	APPROVED BY	DATE	molex MOLEX INCORPORATED			
ANGULAR ±---°		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-39522-002			SHEET NO. 1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

