

**OMNIMATE Power - series LL  
LLF 7.50/10/90V 5.0SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

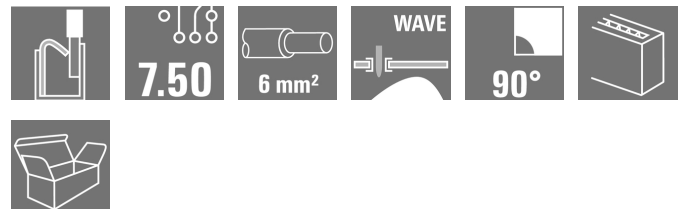

**The sturdy, direct connection for extreme current and voltage requirements in all power electronics applications such as solar inverters, frequency converters, servo-controllers and power supplies.**

**General ordering data**

|              |                                                                                                                                           |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Type         | LLF 7.50/10/90V 5.0SN BK BX                                                                                                               |
| Order No.    | <a href="#">2472160000</a>                                                                                                                |
| Version      | PCB terminal, 7.50 mm, No. of poles: 10, 90°, Solder pin length (l): 5 mm, Black, PUSH IN with actuator, Clamping range, max.: 6 mm², Box |
| GTIN (EAN)   | 4050118550061                                                                                                                             |
| Qty.         | 20 pc(s).                                                                                                                                 |
| Product data | IEC: 1000 V / 41 A / 0.5 - 6 mm²<br>UL: 600 V / 35 A / AWG 24 - AWG 8                                                                     |
| Packaging    | Box                                                                                                                                       |

## OMNIMATE Power - series LL LLF 7.50/10/90V 5.0SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

### Dimensions and weights

|            |          |
|------------|----------|
| Net weight | 36.028 g |
|------------|----------|

### System parameters

|                                              |                            |                                            |                       |
|----------------------------------------------|----------------------------|--------------------------------------------|-----------------------|
| Product family                               | OMNIMATE Power - series LL | Wire connection method                     | PUSH IN with actuator |
| Mounting onto the PCB                        | THT solder connection      | Conductor outlet direction                 | 90°                   |
| Pitch in mm (P)                              | 7.5 mm                     | Pitch in inches (P)                        | 0.295 inch            |
| No. of poles                                 | 10                         | Solder pin length (l)                      | 5 mm                  |
| Solder pin dimensions                        | d = 1.2 mm                 | Solder eyelet hole diameter (D)            | 2 mm                  |
| Solder eyelet hole diameter tolerance (D)+   | 0,1 mm                     | Number of solder pins per pole             | 1                     |
| Stripping length                             | 12 mm                      | L1 in mm                                   | 67.5 mm               |
| L1 in inches                                 | 2.655 inch                 | Touch-safe protection acc. to DIN VDE 0470 | IP 20                 |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch     |                                            |                       |

### Material data

|                                       |                    |                                      |                    |
|---------------------------------------|--------------------|--------------------------------------|--------------------|
| Insulating material                   | Wemid (PA)         | Colour                               | Black              |
| Colour chart (similar)                | RAL 9011           | Insulating material group            | I                  |
| Insulation resistance                 | $\geq 10^8 \Omega$ | UL 94 flammability rating            | V-0                |
| Contact material                      | E-Cu               | Layer structure of solder connection | 4-10 $\mu$ Sn matt |
| Storage temperature, min.             | -40 °C             | Storage temperature, max.            | 85 °C              |
| Max. relative humidity during storage | 80 %               | Operating temperature, min.          | -40 °C             |
| Operating temperature, max.           | 120 °C             |                                      |                    |

### Conductors suitable for connection

|                                                 |                      |                                                 |                   |
|-------------------------------------------------|----------------------|-------------------------------------------------|-------------------|
| Clamping range, min.                            | 0.25 mm <sup>2</sup> | Clamping range, max.                            | 6 mm <sup>2</sup> |
| Wire connection cross section AWG, min.         | AWG 24               | Wire connection cross section AWG, max.         | AWG 8             |
| Solid, min. H05(07) V-U                         | 0.5 mm <sup>2</sup>  | Solid, max. H05(07) V-U                         | 6 mm <sup>2</sup> |
| Flexible, min. H05(07) V-K                      | 0.5 mm <sup>2</sup>  | Flexible, max. H05(07) V-K                      | 6 mm <sup>2</sup> |
| w. plastic collar ferrule, DIN 46228 pt 4, min. | 0.25 mm <sup>2</sup> | w. plastic collar ferrule, DIN 46228 pt 4, max. | 6 mm <sup>2</sup> |
| w. wire end ferrule, DIN 46228 pt 1, min.       | 0.25 mm <sup>2</sup> | w. wire end ferrule, DIN 46228 pt 1, max.       | 6 mm <sup>2</sup> |

### Rated data acc. to IEC

|                                                                           |                                  |                                                                       |         |
|---------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------|---------|
| tested acc. to standard                                                   | In accordance with IEC 60947-7-1 | Rated current, min. no. of poles (Tu=20°C)                            | 41 A    |
| Rated current, max. no. of poles (Tu=20°C)                                | 35 A                             | Rated current, min. no. of poles (Tu=40°C)                            | 41 A    |
| Rated current, max. no. of poles (Tu=40°C)                                | 30 A                             | Rated voltage for surge voltage class / pollution degree II/2         | 1,000 V |
| Rated voltage for surge voltage class / pollution degree III/2            | 1,000 V                          | Rated voltage for surge voltage class / pollution degree III/3        | 1,000 V |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 8 kV                             | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 8 kV    |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 8 kV                             |                                                                       |         |

**OMNIMATE Power - series LL**  
**LLF 7.50/10/90V 5.0SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Rated data acc. to CSA**

|                               |        |                               |       |
|-------------------------------|--------|-------------------------------|-------|
| Rated voltage (Use group B)   | 600 V  | Rated voltage (Use group C)   | 600 V |
| Rated voltage (use group D)   | 600 V  | Rated current (use group B)   | 35 A  |
| Rated current (use group C)   | 35 A   | Rated current (use group D)   | 5 A   |
| Wire cross-section, AWG, min. | AWG 24 | Wire cross-section, AWG, max. | AWG 8 |

**Rated data acc. to UL 1059**

Institute (cURus)



Certificate No. (cURus)

E60693

|                               |                                                                        |                               |       |
|-------------------------------|------------------------------------------------------------------------|-------------------------------|-------|
| Rated voltage (use group B)   | 600 V                                                                  | Rated voltage (use group C)   | 600 V |
| Rated voltage (use group D)   | 600 V                                                                  | Rated current (use group B)   | 35 A  |
| Rated current (use group C)   | 35 A                                                                   | Rated current (use group D)   | 5 A   |
| Wire cross-section, AWG, min. | AWG 24                                                                 | Wire cross-section, AWG, max. | AWG 8 |
| Reference to approval values  | Specifications are maximum values, details - see approval certificate. |                               |       |

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC001284    | ETIM 4.0   | EC002643    |
| ETIM 5.0   | EC002643    | ETIM 6.0   | EC002643    |
| eClass 6.2 | 27-26-11-01 | eClass 9.1 | 27-44-04-01 |

**Notes**

Notes

- Additional colours on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- The test point can only be used as potential-pickup point.

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

**Approvals**

Approvals



### OMNIMATE Power - series LL LLF 7.50/10/90V 5.0SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads


|                                             |                                                 |
|---------------------------------------------|-------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a> |
| Engineering Data                            | <a href="#">STEP</a>                            |
| Motion controllers white paper              | <a href="#">Download Whitepaper</a>             |
| White Paper UL 600 V                        | <a href="#">Download Whitepaper</a>             |

## OMNIMATE Power - series LL LLF 7.50/10/90V 5.0SN BK BX


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

# Drawings


## Dimensional drawing

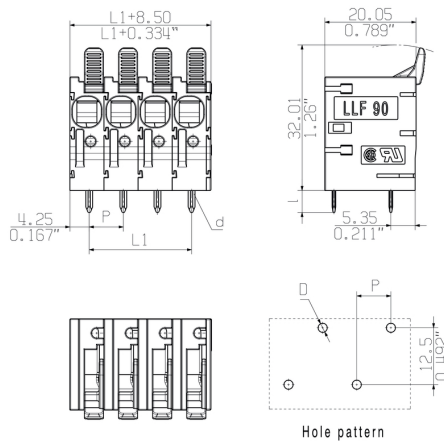

## Derating curve

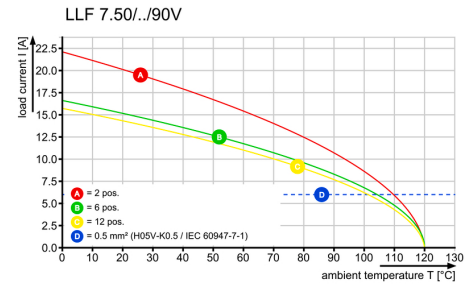

## Derating curve

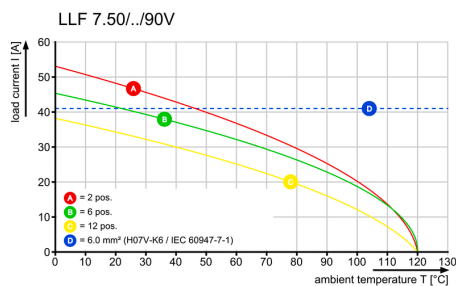

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of  $260 \text{ °C}$ . In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.