



Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Glass passivated chip junction
- This product is available in AEC-Q101 Qualified and PPAP Capable also.

For AEC-Q101 qualified products, please use suffix -AQ in the part number while ordering







Absolute Maximum Ratings (T_A = 25°C Unless otherwise specified)

Parameter		Symbol	GS1A/ M1	GS1B/ M2	GS1D/ M3	GS1G/ M4	GS1J/ M5	GS1K/ M6	GS1M/ M7	Units
Marking Code			M1	M2	M3	M4	M5	M6	M7	-
Max. repetitive peak reverse voltage		VRRM	50	100	200	400	600	800	1000	V
Max. RMS voltage		VRMS	35	70	140	280	420	560	700	
Max. DC blocking voltage		VDC	50	100	200	400	600	800	1000	
Max. average forward rectified current at TL=100°C		IAV)	1							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load		IFSM	30							
Max. instantaneous forward voltage		VF	1.1							
Max. DC reverse current at rated DC blocking voltage	TA=25°C	IR	5							
	TA=125°C		50							
Maximum Reverse Recovery Time ³ TJ = 25°C		TRR	2.5							
Typical junction capacitance ¹		CJ	15							
Typical thermal resistance ²		RθJA	75							°C/W
Operating junction and storage temperature range		TJ,TSTG	-55 to +150							°C

Notes:

1. Measured at 1MHz and applied reverse voltage of 4V D.C.
2. P.C.B. mounted with 0.2"×0.2" (5mm×5mm) copper pad areas
3. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A

Typical Characteristics Curves

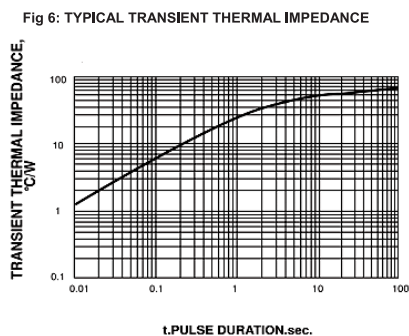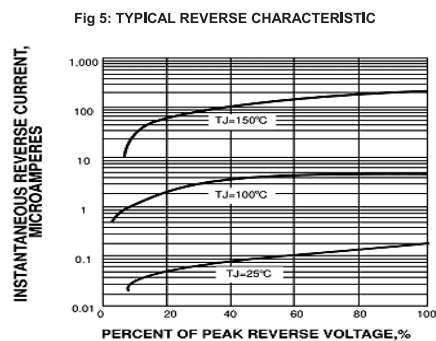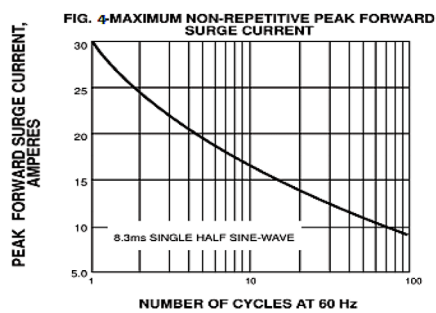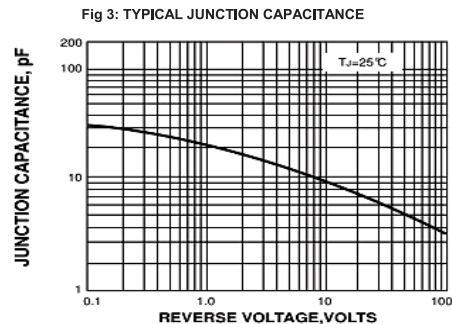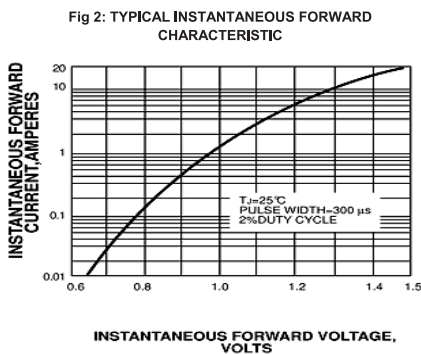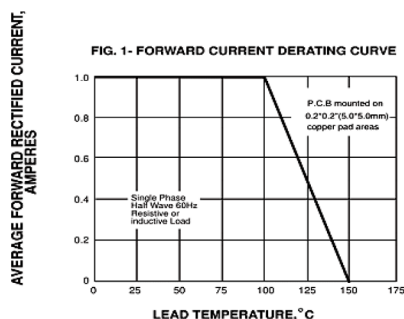

Recommended Reflow Solder Profiles

The recommended reflow solder profiles for Pb and Pb-free devices are shown below.

Figure 1

Shows the recommended solder profile for devices that have Pb-free terminal plating, and where a Pb-free solder is used.

Figure 2

Shows the recommended solder profile for devices with Pb-free terminal plating used with leaded solder, or for devices with leaded terminal plating used with a leaded solder.

Figure 1


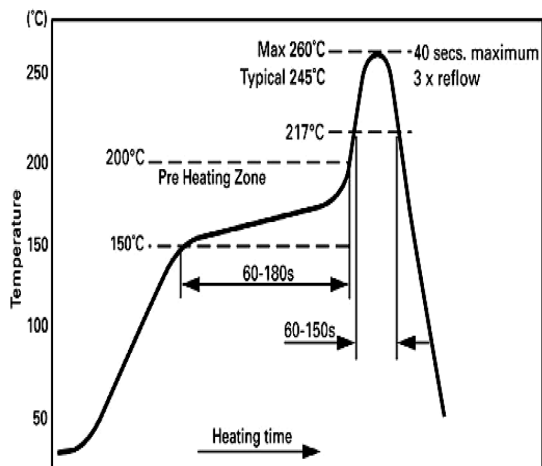



Figure 2

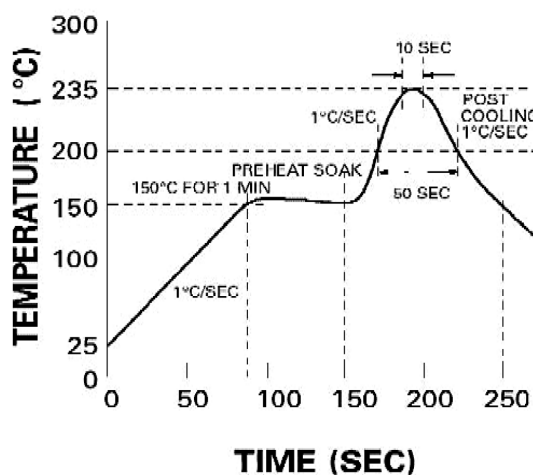


Reflow profiles in tabular form		
Profile Feature	Sn-Pb System	Pb-Free System
Average Ramp-Up Rate	~3°C/second	~3°C/second
Preheat		
– Temperature Range	150-170°C	150-170°C
– Time	60-180 seconds	60-180 seconds
Time maintained above:		
– Temperature	200°C	217°C
– Tim	30-50 seconds	60-150 seconds
Peak Temperature	235°C	260°C max.
Time within +0 -5°C of actual	10 seconds	40 seconds
Ramp-Down Rate	3°C/second max.	6°C/second max

Diagram

DO-214AC (SMA) SMD Plastic Package

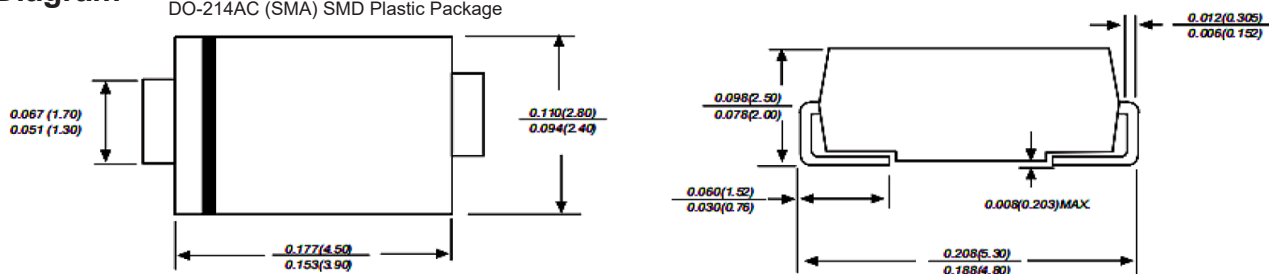

Solder Pad Layout

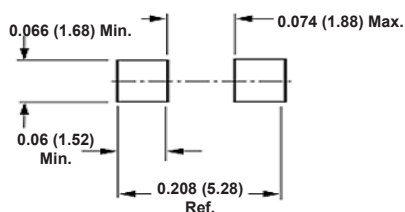

Part Number Table

Description	Part Number
Standard Recovery Diode, 50V, 1A, Single, 1.1V, 2.5µs, 30A	GS1A/M1
Standard Recovery Diode, 100V, 1A, Single, 1.1V, 2.5µs, 30A	GS1B/M2
Standard Recovery Diode, 200V, 1A, Single, 1.1V, 2.5µs, 30A	GS1D/M3
Standard Recovery Diode, 400V, 1A, Single, 1.1V, 2.5µs, 30A	GS1G/M4
Standard Recovery Diode, 600V, 1A, Single, 1.1V, 2.5µs, 30A	GS1J/M5
Standard Recovery Diode, 800V, 1A, Single, 1.1V, 2.5µs, 30A	GS1K/M6
Standard Recovery Diode, 1kV, 1A, Single, 1.1V, 2.5µs, 30A	GS1M/M7

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.