


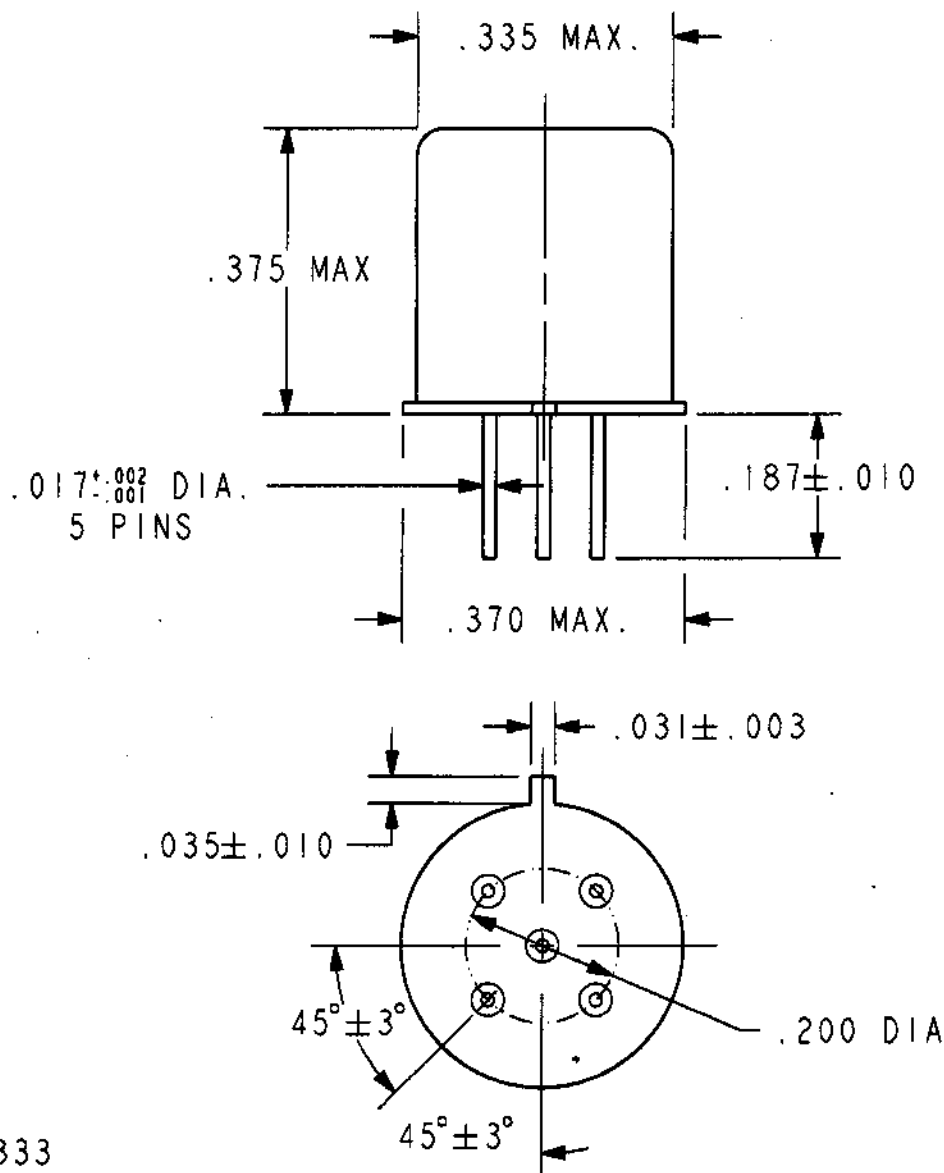

REV. 0
DCO 143333

COIL: @ 25°C
 RESISTANCE 4000 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 14.2 VDC
 MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.


ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
 RELEASE TIME 2.5 MS MAX.
 CONTACT BOUNCE 1.5 MS MAX.

CUST. OPL
 CUST. NO. M39016/10-024L REV.

"JIMS" RELAY

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/29/01

CK 11/30/01

CH Technologies
 advanced control electronic solutions

J1MSP-26XL