

A

B

C

D

E


F

MODEL No. Configuration

ADP-001□

(empty) : Extension Cord not included

C : Extension Cord included

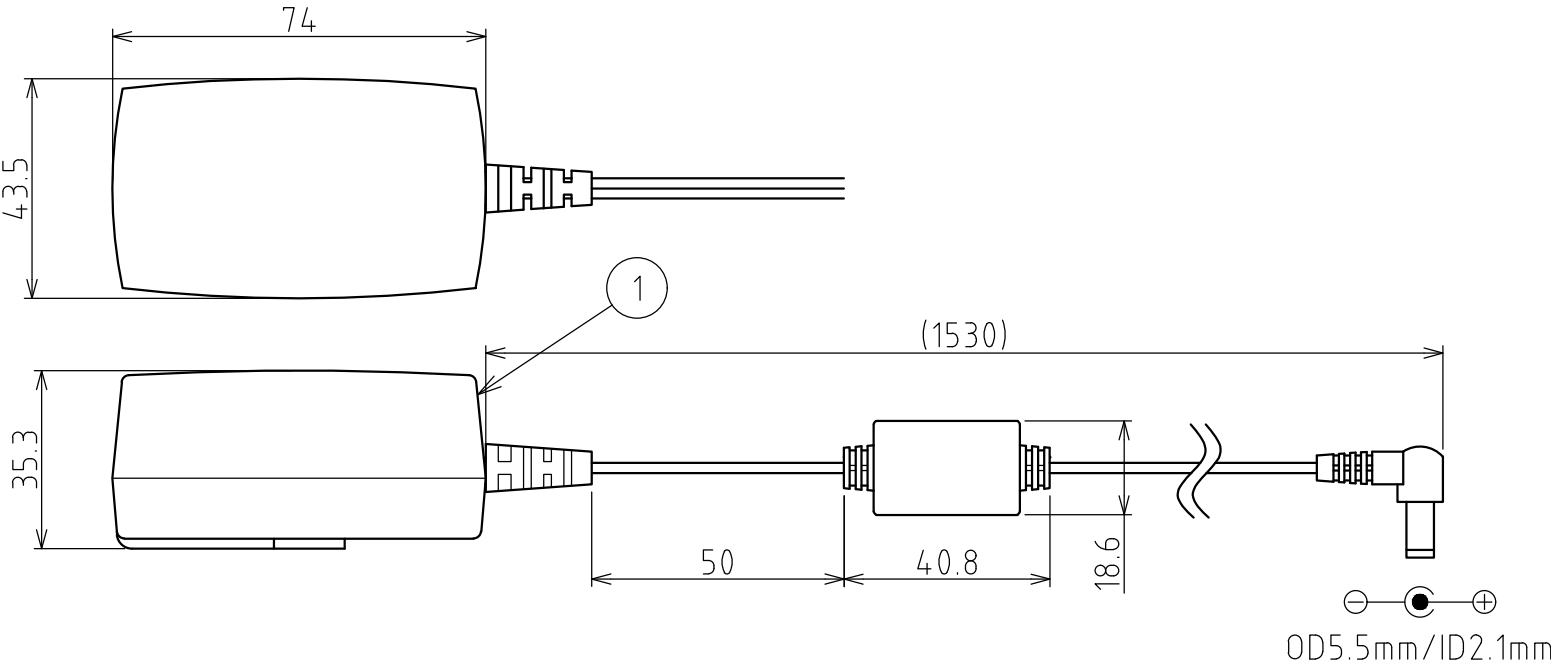


Specifications

Rated Input	AC100V - 240V 50/60Hz	
Rated Output	DC24V 1A	
Operating Ambient Temperature	0 - 40℃	
Storage Ambient Temperature	-10 - 70℃	
Mounting Location	Indoor Only	
Mass	AC Adaptor	123 ±15g
	AC Plug	UL:Approx.7g, VDE:Approx.15g, UK:Approx.16g, CCC:Approx.7g, KC:Approx.17g
	Extension Cord	Approx.38g
Conformity Standards and Certification	PSE UL Listed (File No.E163743) KC / CCC / BSMI U.S.Depaetment of Energy(DOE) &California's Energy Efficiency Standards LEVEL VI Natural Resources Canada(Nrcan) Energy Efficiency Regulations Code of Conduct on Energy Efficiency of External Power Supply Version 5 (CoC Tier2) FCC Part 15 Subpart B class B EN 62368-1, EN 55032, EN 55035, EN IEC 63000	
Remarks	Conforms to the CE Requirements Conforms to the UKCA Requirements	


指定 外公差 General Tolerance	角度公差 Angular tolerance ±[°]				寸法公差 Dimensional tolerance ±[mm]						図番 Drawing No.				ページ Page	
					ADP-001-W18										1/1	
	短辺 長さ Length of short side															
	~	~	100	~	精 f	0.05	0.1	0.2	0.4	0.6	改訂 Rev.	年 月 日 Date	改 訂 履 歴 Revisions			
	10	50	100	~	中 m	0.1	0.3	0.5	0.7	1						
精 f	1	0.5	0.3	0.1	中 m	0.1	0.3	0.5	0.7	1						
粗 v	3	1.5	1	0.5	粗 c	0.3	0.5	1	1.2	2						
												△				

Accessory


● AC Plug

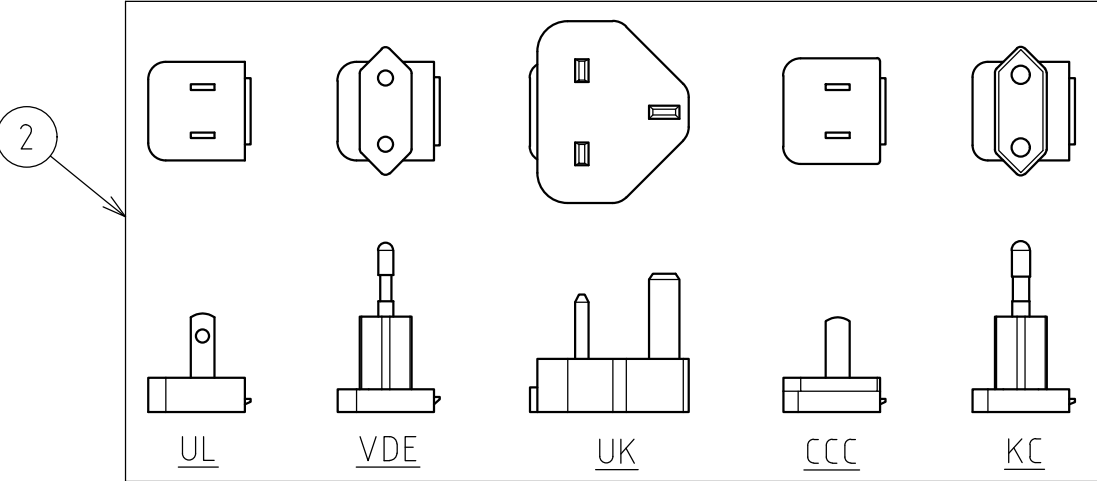

● Extension Cord

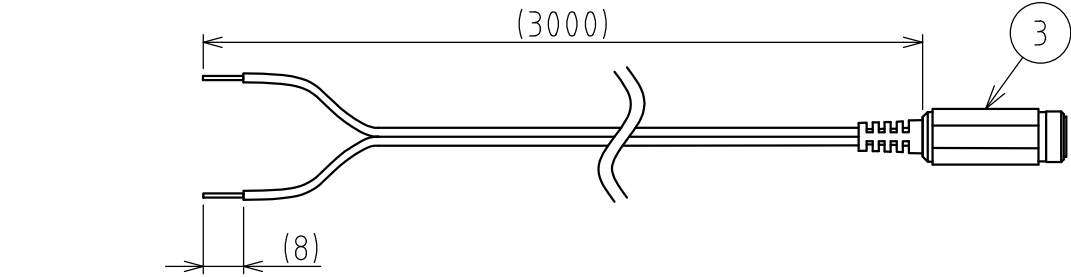

● Cable Tie



※ Only ADP-001C included

1	AC Adaptor	1				
2	AC Plug	5	UL,VDE,UK,CCC,KC			
3	Extension Cord	1	UL2468 AWG22			
4	Cable Tie	1				
番号 No.	部品名 Part Name	数量 Qty.	記事 Remarks			
機種 種 Model		特注No. S.P.No.		ADP-001(C)		
図名 Name		Specifications				
品目コード Part No.		尺度 Scale		三角法 3rd Angle P.	単位 Unit mm	株式会社 パトライト PATLITE Corporation

A

B

C

D

E

F