

**Keyword:**  
**XOL – Extended Operating Life**

**Model:** **SL-889**

**Performance Data** **Size 1/10D**  
(Typical values for batteries stored at 25 °C for one year)


|                                   |                      |
|-----------------------------------|----------------------|
| System                            | Li/SOCl <sub>2</sub> |
| Nominal voltage                   | 3.6 V                |
| Nominal capacity                  | 1 Ah                 |
| Nominal current                   | 0.5 mA               |
| Max. continuous discharge current | 10 mA                |
| Max. pulse current capability     | 20 mA                |
| Anode surface area                | 7.5 cm <sup>2</sup>  |
| Lithium content                   | 0.3 g                |
| Weight                            | 16 g                 |
| Volume                            | 5 cm <sup>3</sup>    |
| Temperature range                 | -55...+85 °C         |

**WARNING:**  
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


**Typical Discharge Curves at +25 °C**

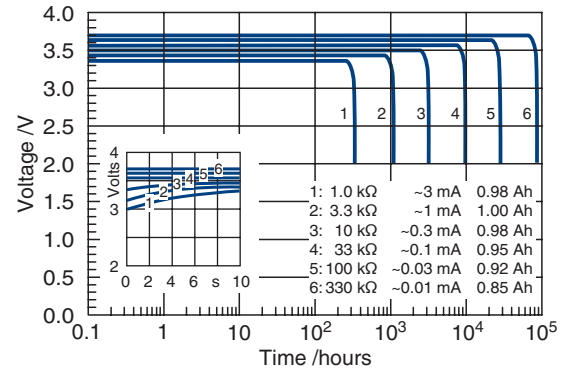


**Available Capacity**

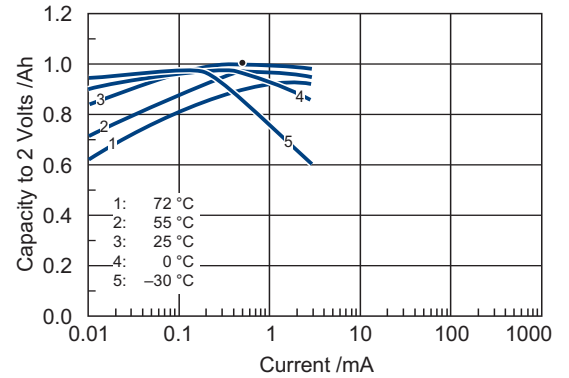

**Operating Voltage**

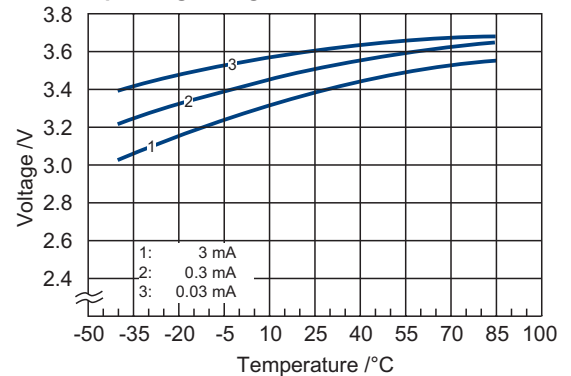

**SL-889**

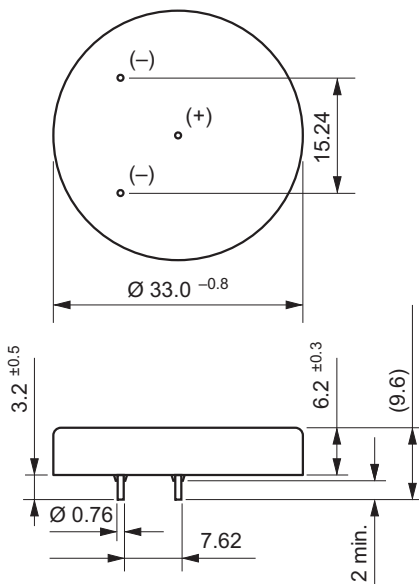

**Available Terminations**

SL-889 Pins

**Catalogue No.**

11 1 18894 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.