



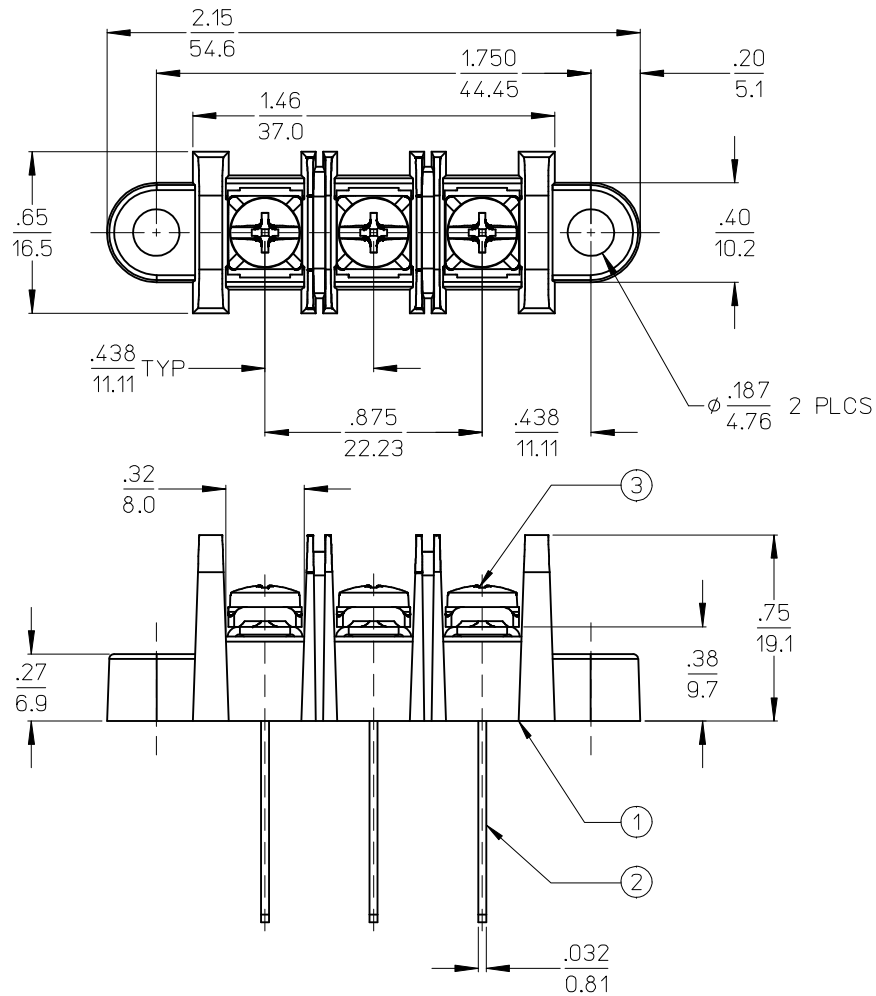


Ⓑ NOTES:


1. MATERIAL: SEE TABLE
2. FINISH: SEE TABLE
3. ELECTRICAL SPECS:
MAX VOLTAGE: 600V
MAX CURRENT: 25A (6-32 WIRE CLAMP SCREW)
4. SCREW TIGHTENING TORQUE: 12 IN LBS. (MAX)
5. WIRE STRIP LENGTH: .31 (7.9mm)
6. WIRE RANGE: 22 TO 12AWG
7. PART IS RoHS COMPLIANT
8. DIMS SHOWN ARE FOR REFERENCE ONLY

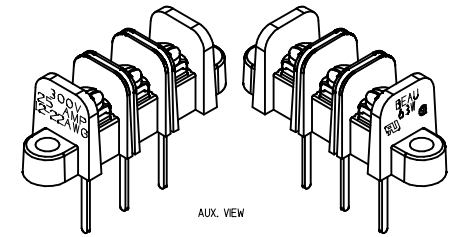

Ⓑ PTH PATTERN

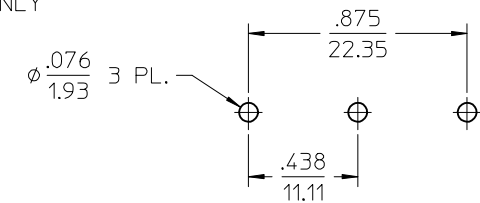

SEALANT APPLIED
AROUND EACH
TERMINAL (3 PLCS)

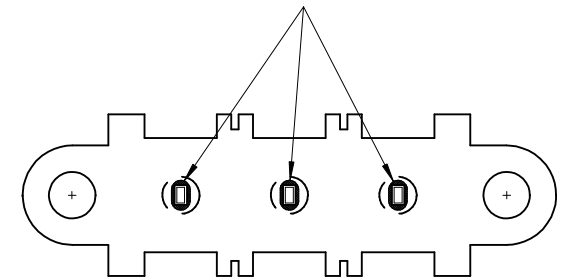

3	3	SCREW #6-32X.250 PAN PHSL.ZN, BR, STEEL -50	STEEL	ZN, CLEAR CHROMATE
2	3	TERM WW SN/B EXTRA LONG	BRASS	TIN
1	1	INSULATOR, SR, PC, MOLDED MTG	PBT	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

REMOVED RED EPOXY NOTE
REV'D NOTES: ADD PTH PATTERN
EC NO: IPG2017-0467
DWRN:STONE 2016/11/09
CHYKDB RUPERT 2016/11/14
APPR:BWODMAN 2016/11/30

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
JENCINAS	2008/01/14
CHECKED BY	DATE
CYORK	2008/01/14
APPROVED BY	DATE
JMACNEIL	2008/01/14
MATERIAL NO.	
386390067	
SIZE B	

SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE 11.11/.438 SR BTS ASSY 600V NO PADS, SQ. WASHER SEALED TERMINAL HOLES		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-38639-011		SHEET NO. 1 OF 1