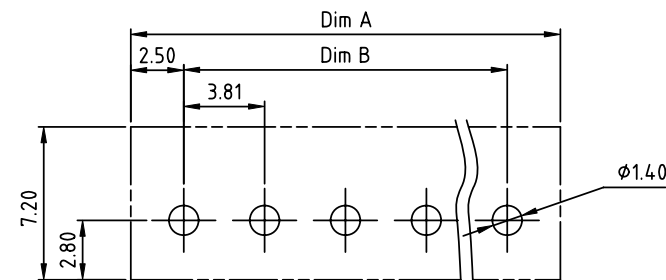
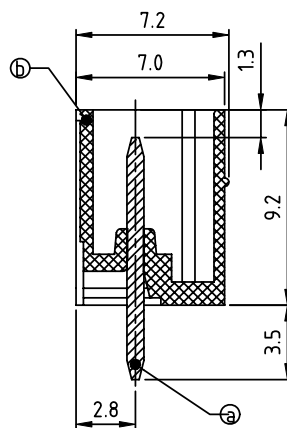
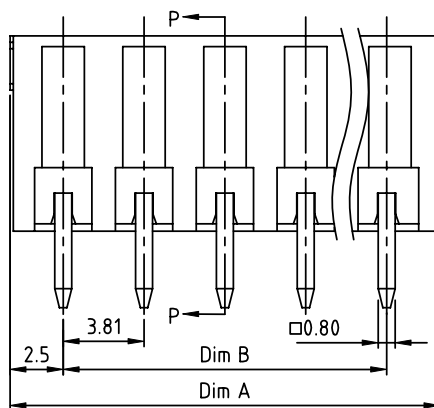
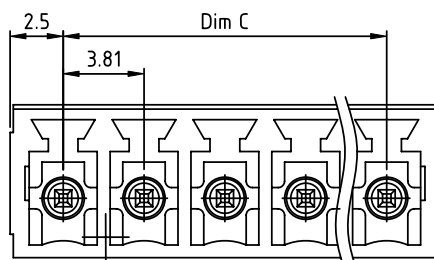


PRODUCT NUMBER

PITCH

0Qxx32x000J0G

3.81 mm

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item ① Male contact pin: Copper Tin plated
- Item ② Terminal housing: Thermoplastic (UL94 V-0)

Electrical:

cULus /VDE

- Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

DIMENSION

Dim A	(N-1)×3.81+5.0
Dim B&C	(N-1)×3.81

N= number of poles

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

PART NO.: 0Q xx 3 2 x 0 00J0 G

No. of poles
02 2 poles
03 3 poles
... ..
24 24 poles

Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK			
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title			
					angles	MM	TERMINAL BLOCK			
					X±0.5		PLUGGABLE SOCKET, VERTICAL			
					X.X±0.3		dwg no			
					X'±1°		sheet 1 of 1 size			
					dr HANKE FENG 032714		0Qxx32x000J0G			
					enr HANKE FENG 032714		A4			
					chr SHI JUN 032714		type			
					appd SHI JUN 032714		CUSTOMER Drawing			
sheet index	revision	A								