



PTVSxP1BPL series

600 W Transient Voltage Suppressor

5 August 2024

Product data sheet

1. General description

600 W bi-directional Transient Voltage Suppressor (TVS) in a CFP5-FL (SOD128FL) small and flat lead Surface-Mounted Device (SMD) plastic package, designed for transient voltage protection.

2. Features and benefits

- Rated peak pulse power at 10/1000 μ s waveform: $P_{PPM} = 600$ W
- Reverse standoff voltage: $V_{RWM} = 9$ V to 160 V
- Very low package height: 1 mm
- Excellent clamping capability
- Small plastic package suitable for surface-mounted design
- Reverse current: $I_{RM} < 1$ μ A for $V_{RWM} \geq 11$ V

3. Applications

- Power supply protection
- Power management
- Telecom, Computer, Industrial and Consumer electronics application

4. Quick reference data



Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V_{RWM}	reverse standoff voltage	$T_{amb} = 25$ °C		9	-	160	V
P_{PPM}	rated peak pulse power	$t_p = 10/1000$ μ s; $T_{amb} = 25$ °C	[1]	-	-	600	W

[1] In accordance with IEC 61643-321 (10/1000 μ s current waveform).

5. Pinning information

Table 2. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	K1	cathode 1	 <p>Transparent top view</p> <p>CFP5-FL (SOD128FL-1)</p>	 <p>sym045</p>
2	K2	cathode 2		

6. Ordering information

Table 3. Ordering information

Type number ^[1]	Package		
	Name	Description	Version
PTVSXP1BPL series	CFP5-FL	Plastic, surface mounted package; 2 terminals; 4.275 mm x 2.6 mm x 1 mm body	SOD128FL-1

[1] The series consists of 38 types with reverse standoff voltages from 9 V to 160 V.

7. Marking

Table 4. Marking codes

Type number	Marking code	Type number	Marking code
PTVS9V0P1BPL	F3	PTVS43VP1BPL	FN
PTVS10VP1BPL	F4	PTVS45VP1BPL	FP
PTVS11VP1BPL	F5	PTVS48VP1BPL	FR
PTVS12VP1BPL	F6	PTVS51VP1BPL	FS
PTVS13VP1BPL	F7	PTVS54VP1BPL	FT
PTVS14VP1BPL	F8	PTVS58VP1BPL	FU
PTVS15VP1BPL	F9	PTVS60VP1BPL	FV
PTVS16VP1BPL	FA	PTVS64VP1BPL	FW
PTVS17VP1BPL	FB	PTVS70VP1BPL	FY
PTVS18VP1BPL	FC	PTVS75VP1BPL	G2
PTVS20VP1BPL	FD	PTVS78VP1BPL	G3
PTVS22VP1BPL	FE	PTVS85VP1BPL	G4
PTVS24VP1BPL	FF	PTVS90VP1BPL	G5
PTVS26VP1BPL	FG	PTVS100VP1BPL	G6
PTVS28VP1BPL	FH	PTVS110VP1BPL	G7
PTVS30VP1BPL	FJ	PTVS120VP1BPL	G8
PTVS33VP1BPL	FK	PTVS130VP1BPL	G9
PTVS36VP1BPL	FL	PTVS150VP1BPL	GA
PTVS40VP1BPL	FM	PTVS160VP1BPL	GB

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
P_{PPM}	rated peak pulse power	$t_p = 10/1000 \mu s$	[1]	-	600	W
I_{PPM}	rated peak pulse current	$t_p = 10/1000 \mu s$	[1]	-	see table 8	A
T_j	junction temperature			-	150	°C
T_{amb}	ambient temperature			-55	150	°C
T_{stg}	storage temperature			-55	150	°C

[1] In accordance with IEC 61643-321 (10/1000 μs current waveform).



Table 6. ESD maximum ratings

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
V_{ESD}	electrostatic discharge voltage	IEC 61000-4-2; contact discharge; $T_{amb} = 25^\circ C$	[1]	-	30	kV

[1] Device stressed with ten non-repetitive ESD pulses.

Table 7. ESD standards compliance

Standard	
Per diode	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4kV

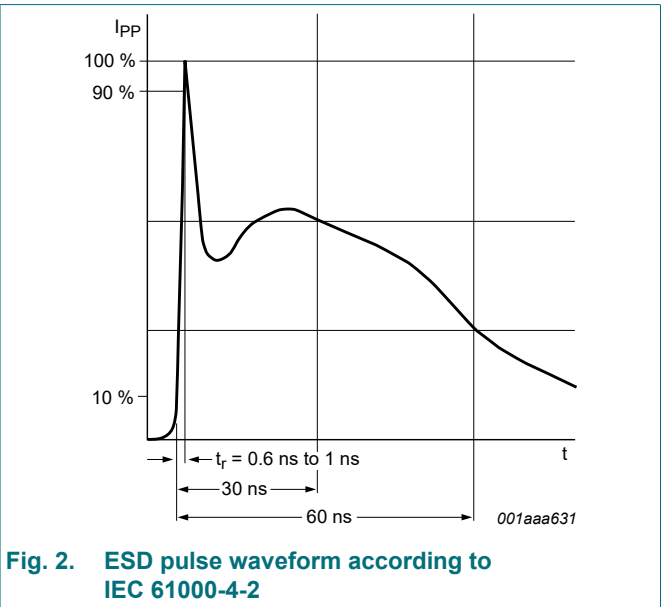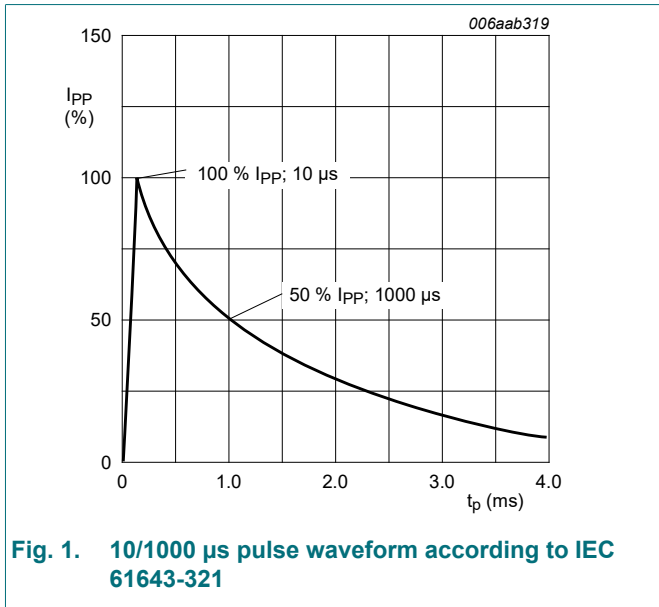

9. Characteristics

Table 8. Characteristics per type

$T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified.

Type number	Reverse standoff voltage V_{RWM} (V)	Breakdown voltage V_{BR} (V) at test current I_T			Reverse leakage current I_{RM} at V_{RWM} (μA)	Test current I_T (mA)	Clamping voltage V_{CL} (V)	
		Max	Min	Typ			Max	Max
PTVS9V0P1BPL	9.0	10.00	10.55	11.10	10	1	15.4	39.0
PTVS10VP1BPL	10	11.10	11.70	12.30	5	1	17.0	35.3
PTVS11VP1BPL	11	12.20	12.85	13.50	1	1	18.2	33.0
PTVS12VP1BPL	12	13.30	14.00	14.70	1	1	19.9	30.2
PTVS13VP1BPL	13	14.40	15.15	15.90	1	1	21.5	28.0
PTVS14VP1BPL	14	15.60	16.40	17.20	1	1	23.2	25.9
PTVS15VP1BPL	15	16.70	17.60	18.50	1	1	24.4	24.6
PTVS16VP1BPL	16	17.80	18.75	19.70	1	1	26.0	23.1
PTVS17VP1BPL	17	18.90	19.90	20.90	1	1	27.6	21.8
PTVS18VP1BPL	18	20.00	21.05	22.10	1	1	29.2	20.6
PTVS20VP1BPL	20	22.20	23.35	24.50	1	1	32.4	18.6
PTVS22VP1BPL	22	24.40	25.65	26.90	1	1	35.5	16.9
PTVS24VP1BPL	24	26.70	28.10	29.50	1	1	38.9	15.5
PTVS26VP1BPL	26	28.90	30.40	31.90	1	1	42.1	14.3
PTVS28VP1BPL	28	31.10	32.75	34.40	1	1	45.4	13.3
PTVS30VP1BPL	30	33.30	35.05	36.80	1	1	48.4	12.4
PTVS33VP1BPL	33	36.70	38.65	40.60	1	1	53.3	11.3
PTVS36VP1BPL	36	40.00	42.10	44.20	1	1	58.1	10.4
PTVS40VP1BPL	40	44.40	46.75	49.10	1	1	64.5	9.3
PTVS43VP1BPL	43	47.80	50.30	52.80	1	1	69.4	8.7
PTVS45VP1BPL	45	50.00	52.65	55.30	1	1	72.7	8.3
PTVS48VP1BPL	48	53.30	56.10	58.90	1	1	77.4	7.8
PTVS51VP1BPL	51	56.70	59.70	62.70	1	1	82.4	7.3
PTVS54VP1BPL	54	60.00	63.15	66.30	1	1	87.1	6.9
PTVS58VP1BPL	58	64.40	67.80	71.20	1	1	93.6	6.5
PTVS60VP1BPL	60	66.70	70.20	73.70	1	1	96.8	6.2
PTVS64VP1BPL	64	71.10	74.85	78.60	1	1	103.0	5.9
PTVS70VP1BPL	70	77.80	81.90	86.00	1	1	113.0	5.3
PTVS75VP1BPL	75	83.30	87.70	92.10	1	1	121.0	5.0
PTVS78VP1BPL	78	86.70	91.25	95.80	1	1	126.0	4.8
PTVS85VP1BPL	85	94.40	99.20	104.0	1	1	137.0	4.4
PTVS90VP1BPL	90	100.0	105.5	111.0	1	1	146.0	4.1
PTVS100VP1BPL	100	111.0	117.0	123.0	1	1	162.0	3.7
PTVS110VP1BPL	110	122.0	128.5	135.0	1	1	177.0	3.4
PTVS120VP1BPL	120	133.0	140.0	147.0	1	1	193.0	3.1
PTVS130VP1BPL	130	144.0	151.5	159.0	1	1	209.0	2.9

Type number	Reverse standoff voltage V_{RWM} (V)	Breakdown voltage V_{BR} (V) at test current I_T			Reverse leakage current I_{RM} at V_{RWM} (μ A)	Test current I_T (mA)	Clamping voltage V_{CL} (V)	
		Max	Min	Typ			Max	I_{PPM} (A)
PTVS150VP1BPL	150	167.0	176.0	185.0	1	1	243.0	2.5
PTVS160VP1BPL	160	178.0	187.5	197.0	1	1	259.0	2.3

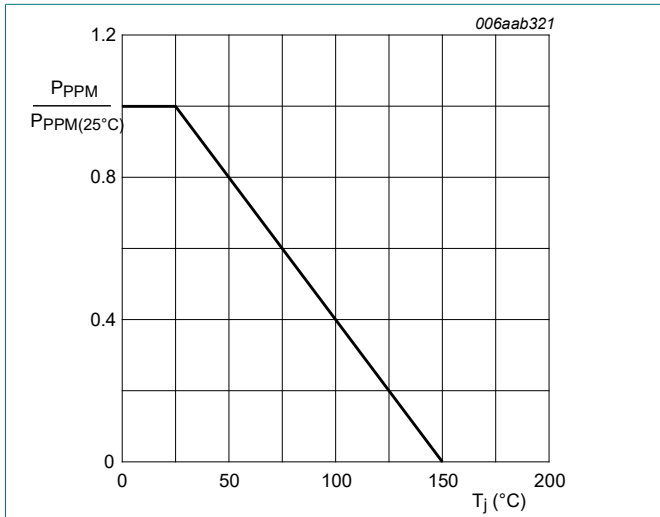


Fig. 3. Relative variation of rated peak pulse power as a function of junction temperature; typical values


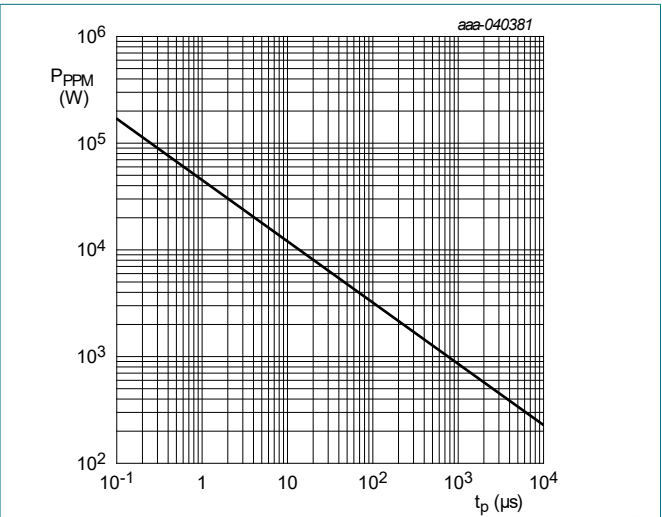


Fig. 4. Peak pulse power as a function of pulse duration; typical values [1] [2] [3]

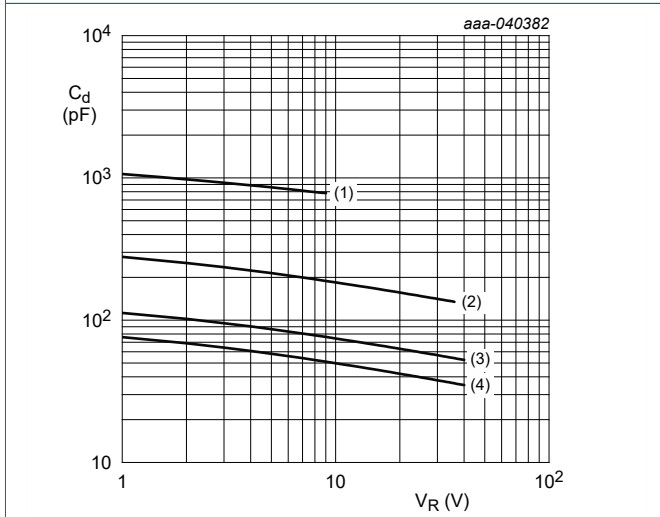

$T_{amb} = 25\text{ }^{\circ}\text{C}; f = 1\text{ MHz}$
 (1) PTVS9V0P1BPL
 (2) PTVS36VP1BPL
 (3) PTVS100VP1BPL
 (4) PTVS160VP1BPL

Fig. 5. Diode capacitance as a function of reverse voltage; typical values

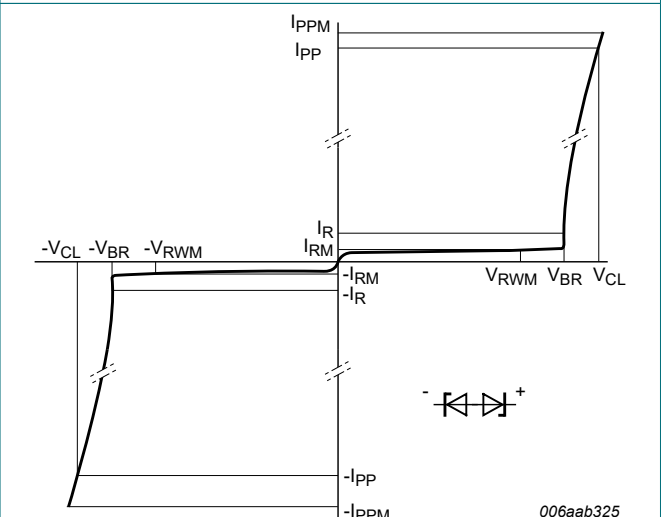



Fig. 6. V-I characteristics for a bidirectional TVS protection diode

[1] Peak pulse power derating curve derived from typical measured values using 8/20 μ s and 10/1000 μ s waveforms.
 [2] In accordance with IEC 61000-4-5 (8/20 μ s waveforms).
 [3] In accordance with IEC 61643-321 (10/1000 μ s waveforms).

10. Package outline

Plastic, surface mounted package; 2 terminals; 4.275 mm x 2.6 mm x 1 mm body

SOD128FL-1

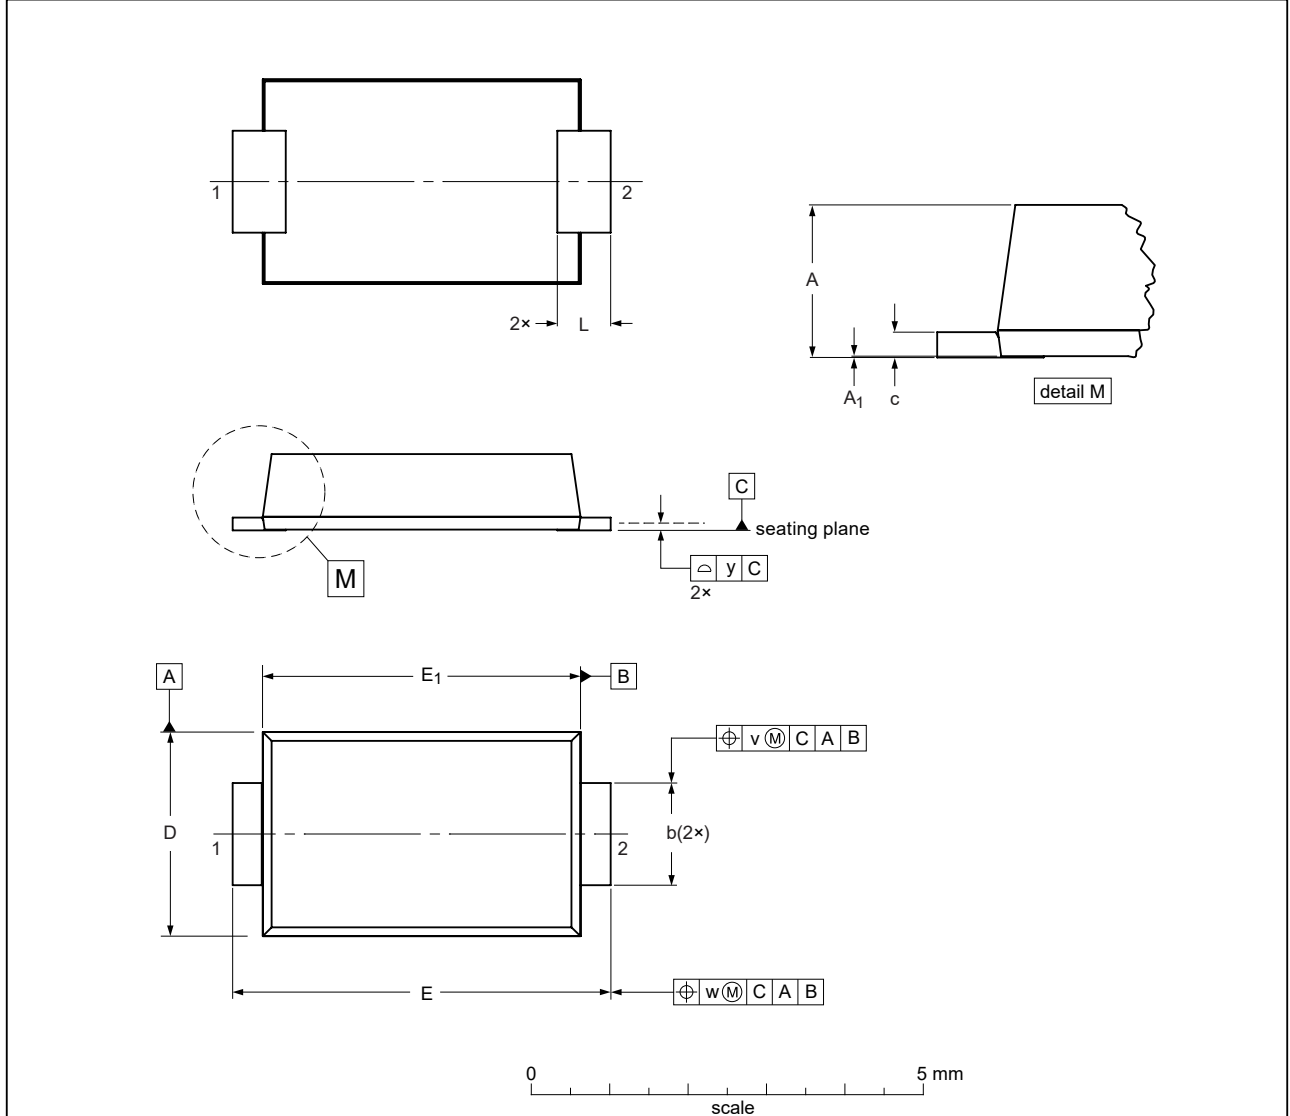

Dimensions (mm are the original dimensions)

Unit ⁽¹⁾	A	A ₁	b	c	D	E	E ₁	L	y	v
max	1.1	0.1	1.65	0.40	2.95	5.60	4.60	1.50		
mm nom									0.1	0.13
min	0.90	0	1.25	0.10	2.25	4.80	3.95	0.70		

Note
Dimension D & E₁ do not include mold flash, protrusions or gate burrs. Mold flash, Protrusions or gate burrs shall not exceed 0.13 mm per end or per side.

sod128fl-1_po

Outline version	References			European projection	Issue date
	IEC	JEDEC	JEITA		
SOD128FL-1		DO-221AC			24-05-14

Fig. 7. Package outline CFP5-FL (SOD128FL-1)

11. Soldering

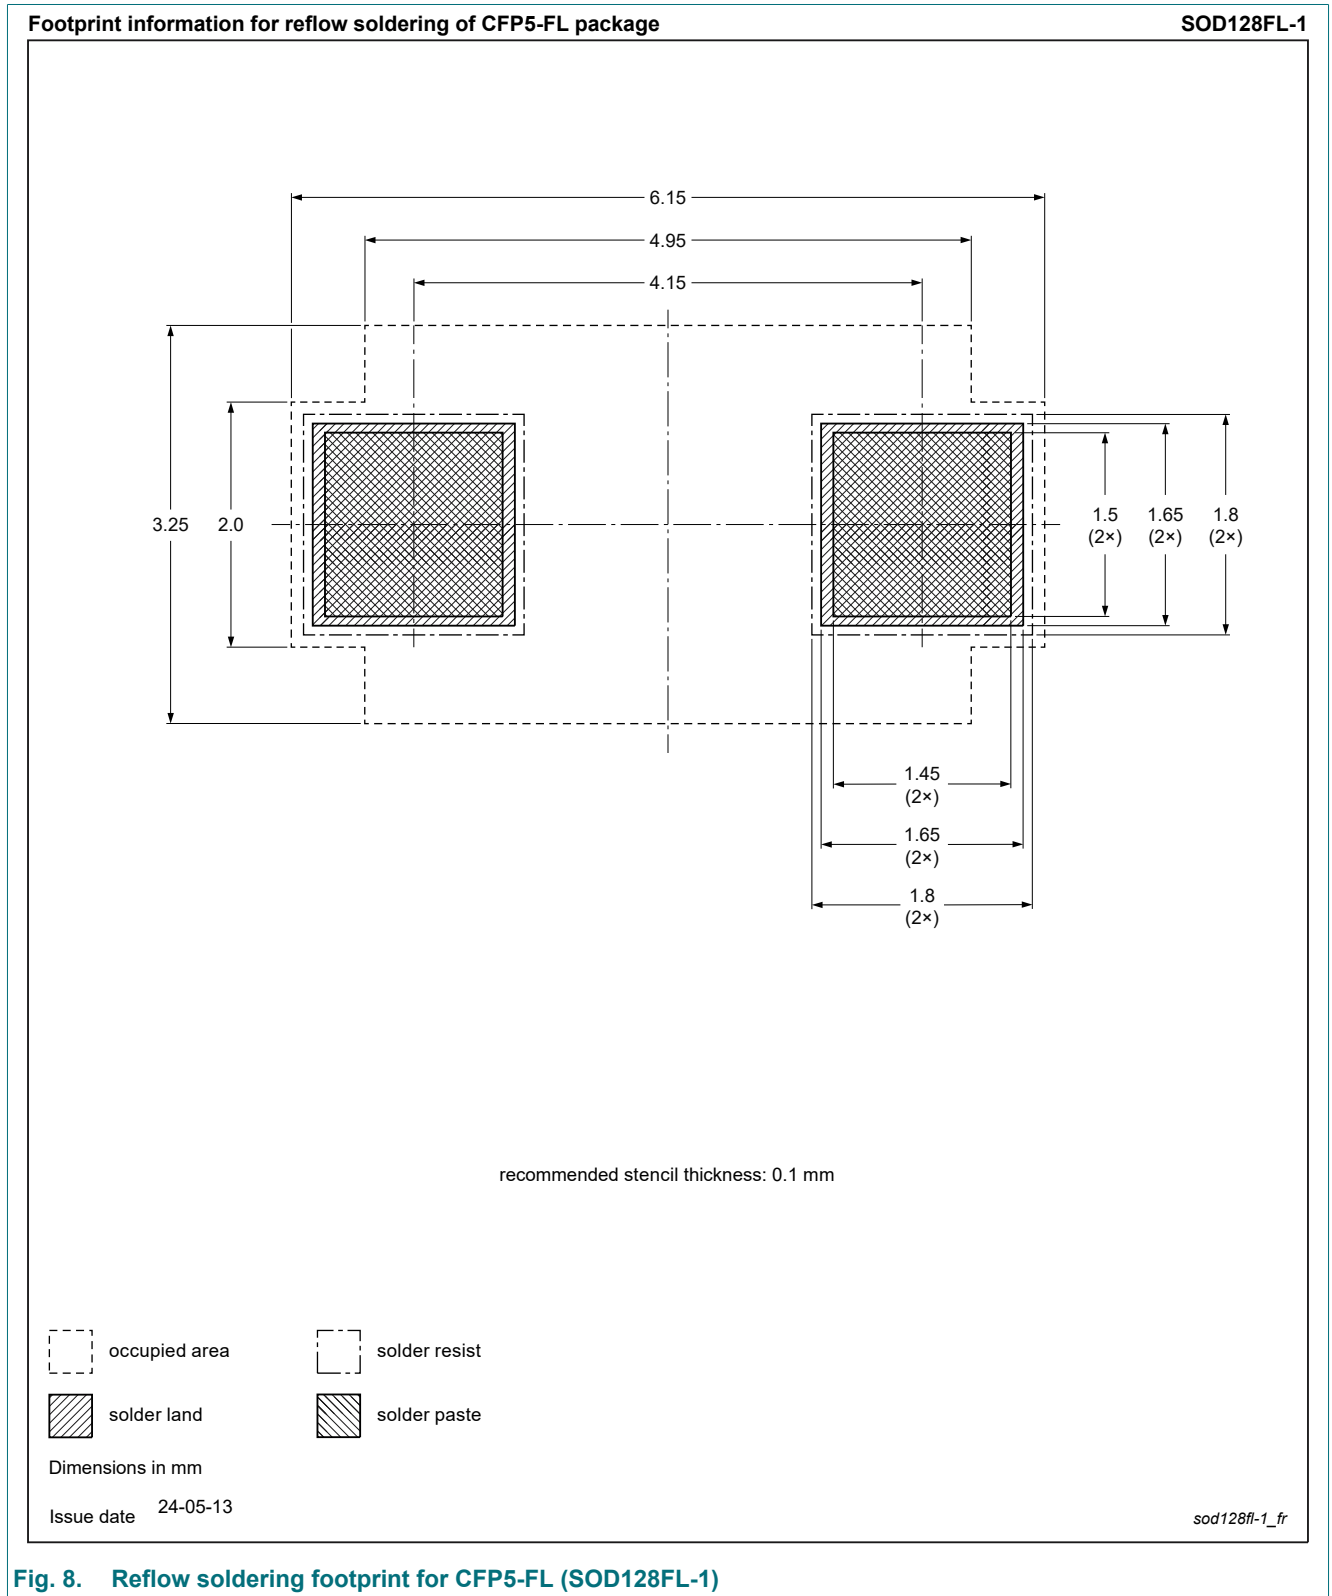


Fig. 8. Reflow soldering footprint for CFP5-FL (SOD128FL-1)

12. Revision history

Table 9. Revision history

Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
PTVSxP1BPL_SER v.1	20240805	Product data sheet	-	-

13. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

- 1. General description..... 1
- 2. Features and benefits..... 1
- 3. Applications..... 1
- 4. Quick reference data..... 1
- 5. Pinning information.....2
- 6. Ordering information.....2
- 7. Marking.....2
- 8. Limiting values..... 3
- 9. Characteristics.....4
- 10. Package outline..... 6
- 11. Soldering..... 7
- 12. Revision history.....8
- 13. Legal information.....9

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>
For sales office addresses, please send an email to: salesaddresses@nexperia.com
Date of release: 5 August 2024
