




TAOGLAS®

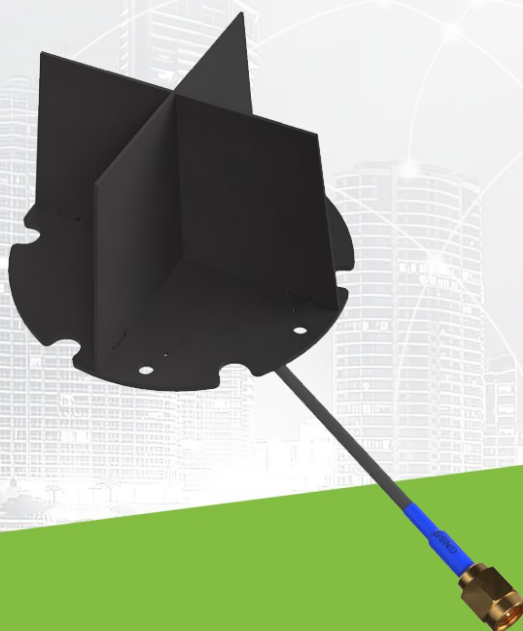

Datasheet

Part No:
EAHP.60.01.0100D

Description

Embedded Active Antenna for GNSS L1/L2/L5 L-Band with 100mm RG-174 & SMA(M)

Features:

Embedded Active Antenna
Covering: L1/L2/L5 + L-Band
Dims: Ø75 x 44mm
100mm of RG174 with SMA(M) ST connector
RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	7
4.	Packaging	8
5.	Antenna Characteristics	9
6.	Radiation Patterns	16
7.	LNA Characteristics	24
	Changelog	27

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas EAHP.60 is an embedded active multi-band GNSS antenna that has been carefully designed for high performance cm-level positional accuracy on the full GNSS spectrum. Bands covered include GPS/QZSS L1/L2/L5, GLONASS G1/G2/G3, Galileo E1/E5a/E5b/E6, BeiDou B1/B2a/B2b/B3, L-Band, QZSS L6, NAVIC L5, as well as SBAS (WAAS/EGNOS/GAGAN/SDCM/SNAS). This allows the user to achieve higher location accuracy, as well as stability of position tracking in urban environments with their device.

The EAHP.60 has excellent performance across the full bandwidth of the antenna and its design has an even gain across the hemisphere giving almost excellent, broad axial ratio which in turn makes it resilient to multipath rejection and excellent phase centre stability. The LNA used in the EAHP.60 ensures excellent out of band rejection and provides excellent positioning stability and reliability of GNSS signals.

Typical applications for the EAHP.60 include:

- Autonomous Driving
- Precision Positioning for Robotics
- Precision Agriculture
- Inventory Management & Container tracking
- Telematics & Asset Tracking
- Timing Accuracy Synchronization

The EAHP.60 is the latest addition to an ongoing product road map of high precision antennas by Taoglas. For RTK applications, when used on the base and/or the rover, the EAHP.60 can achieve genuine cm-level accuracy.

Cable and connectors are customizable. Please contact your regional Taoglas customer support team for further information.

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■



GNSS Bands and Constellations

GNSS Electrical									
Frequency (MHz)	1176.45	1207	1227.6	1248	1278.75	1542	1561	1575.42	1603
VSWR (max.)	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1
Passive Antenna Efficiency (%)	65.84	66.6	72.85	75.74	67.42	60.04	55.58	52.95	47.65
Passive Antenna Gain at Zenith (dBic)	6.67	6.24	6.76	6.76	6.27	4.74	3.74	3.74	2.57
Axial Ratio (dB)	2.94	3.08	1.7	0.89	0.66	1.84	1.63	1.51	1.27
PCO_x (cm)	0.05	0.49	0.49	0.45	0.45	0.22	0.23	0.2	0.15
PCO_y (cm)	-1.68	-1.34	-1.14	-1.27	-1.33	-1.16	-1.24	-1.27	-1.28
PCV (cm)	0.5	0.6	0.6	0.6	0.5	0.1	0.1	0.1	0.1
Group Delay Mean (ns)	9.65	10.69	10.89	12.47	12.17	11.23	11.3	10.85	10.8
Polarization	RHCP								
Impedance	50 Ω								
Tested on a 30x30cm Ground Plane									

LNA and Filter Electrical Properties									
Frequency (MHz)	1176.45	1207	1227.6	1248	1278	1542	1561	1575.42	1603
VSWR (max.)	<2								
Gain (dBic)	27.3	25.3	25.9	25.3	25.0	27.1	27.2	26.2	26.2
Noise (dBic)	3.7	3.1	4.8	3.9	4	3.8	4.2	4.3	3.8
Voltage In	1.8V~5.5V								
ESD	20KV for Contact and 30KV for Air								
Out Of Band Rejection	-70dB for frequencies <1GHz -60dB for frequencies <1.7GHz								
Power Consumption (mA)	22								
LTE Band 13 interference filter circuit									

Mechanical	
Dimensions	Ø75 x 44mm
Weight	75g
Connector	SMA(M) ST
Cable	RG-174

Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH

3. Mechanical Drawing


ISO NO.: EDW.002438

STATE: Release

NOTES:

- * All material must be RoHS compliant.
- * Use this drawing together with the corresponding 3D CAD database file to fully describe the part.
- * The connector orientation has a fixed position to the antenna as per drawing.
- *** Critical Dimensions.

REV	ZONE	DESCRIPTION	ENG.	APPROVED	DATE
01	All	Initial design	Aaron	Aaron	2024/8/28
02	All	Amend PCB	Aaron	Aaron	2024/9/8

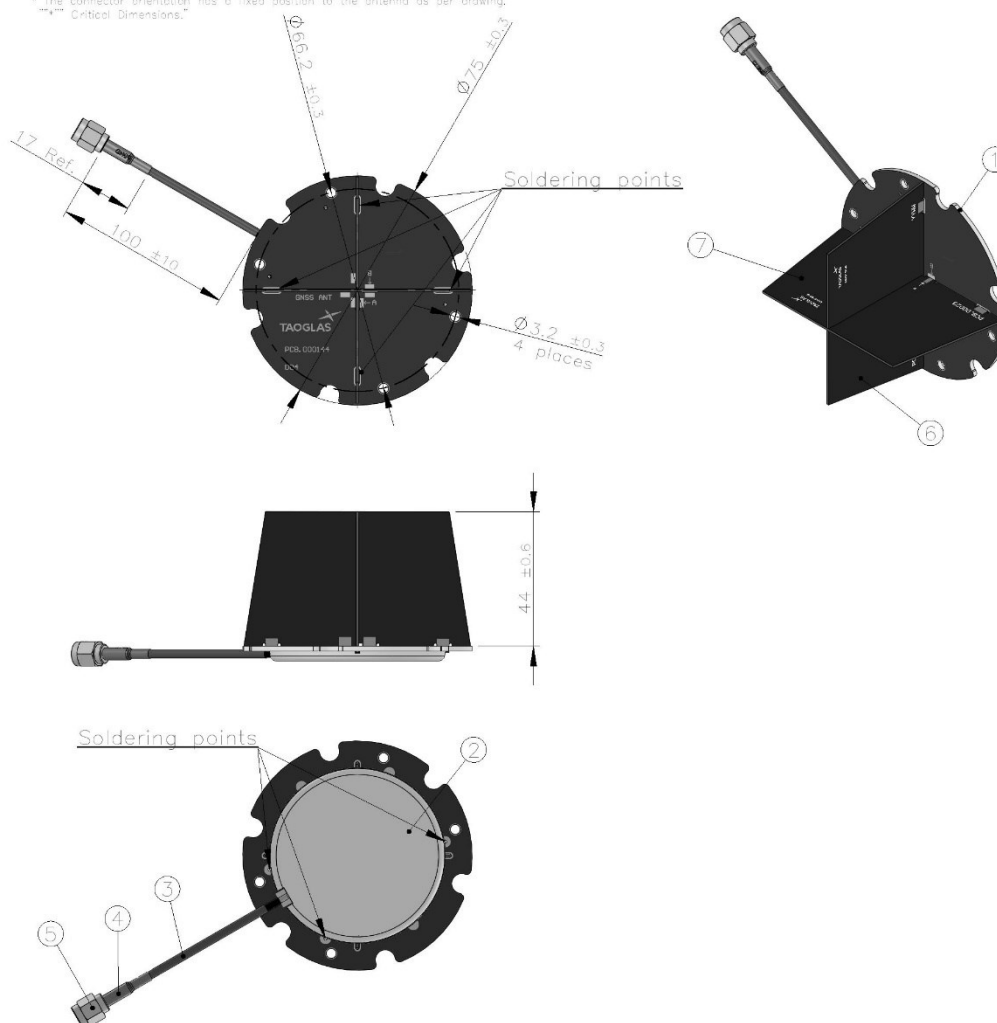

	Name	Material	Finish	Qty
1	PCB_XAHP/EAHP.60	FR4 0.8t	Black	1
2	Shielding case	SPTE 0.2t	Tin Plated	1
3	RG-174 cable	PVC	Black	1
4	Heat Shrink Tube(GNSS)	PE	Blue Tube/White Text	1
5	SMA(M)ST Plug_for RG-316/RG-174	Brass	Au Plated	1
6	XAHP.60-A	FR4 0.8t	Black	1
7	XAHP.60-B	FR4 0.8t	Black	1


APPROVED BY: Chozen	 TAOGLAS TW Design Centre This drawing is TAOGLAS Confidential information and its inherent design concepts are property of TAOGLAS. This is not to be copied or shared with third parties without the prior written consent of TAOGLAS.		
CHECK BY: Aaron			
DRAWN BY: Aaron	TITLE: Embedded Active Antenna for GNSS L1/L2/L5 L-Band with 100mm RG-174 & SMA(M)		
DATE: 2024/5/3			
UNLESS OTHERWISE SPECIFIED TOLERANCES ON:	XX ±0.5 Y ±0.3 Z ±0.2 (XX ±0.1) (YY ±0.2)	PART NO.: EAHP.60.01.0100D	
THIRD ANGLE PROJECTION		UNIT: mm	SCALE: 1:2
		PAGES: 1/1	REV: D02

4. Packaging

1 pcs per static bag
Bag dimensions: 180x250mm
Weight: 0.35kg



36pcs per carton
Carton Dimensions: 370x370x300mm
Weight: 2.5kg

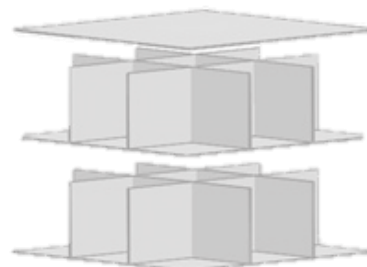


5. Antenna Characteristics

5.1 Test Setup

AUT




Vector Network Analyzer

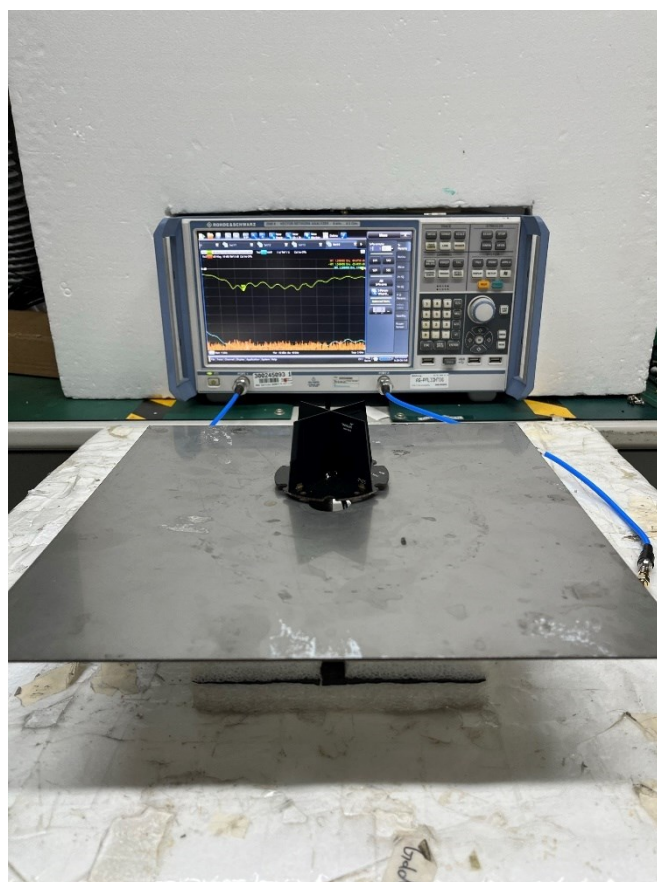


VNA Test Set-up on a 30x30cm Ground Plane


5.2 Return Loss

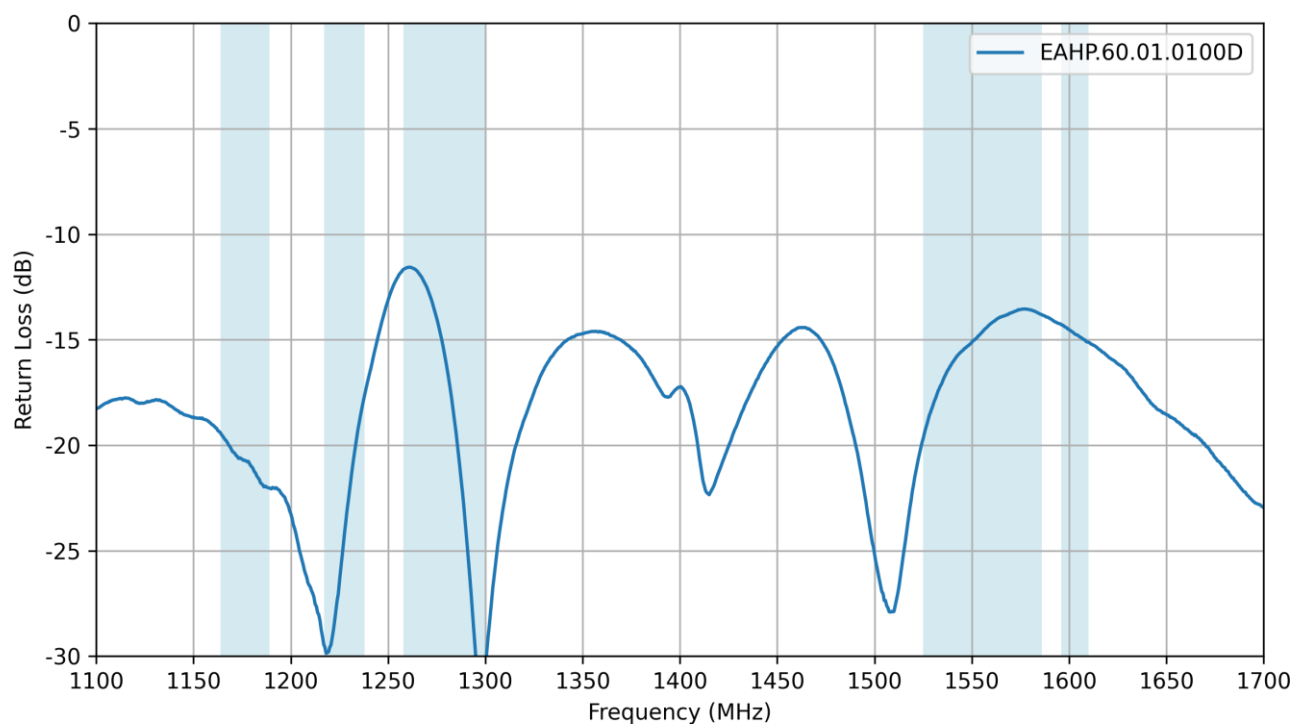


5.3 VSWR

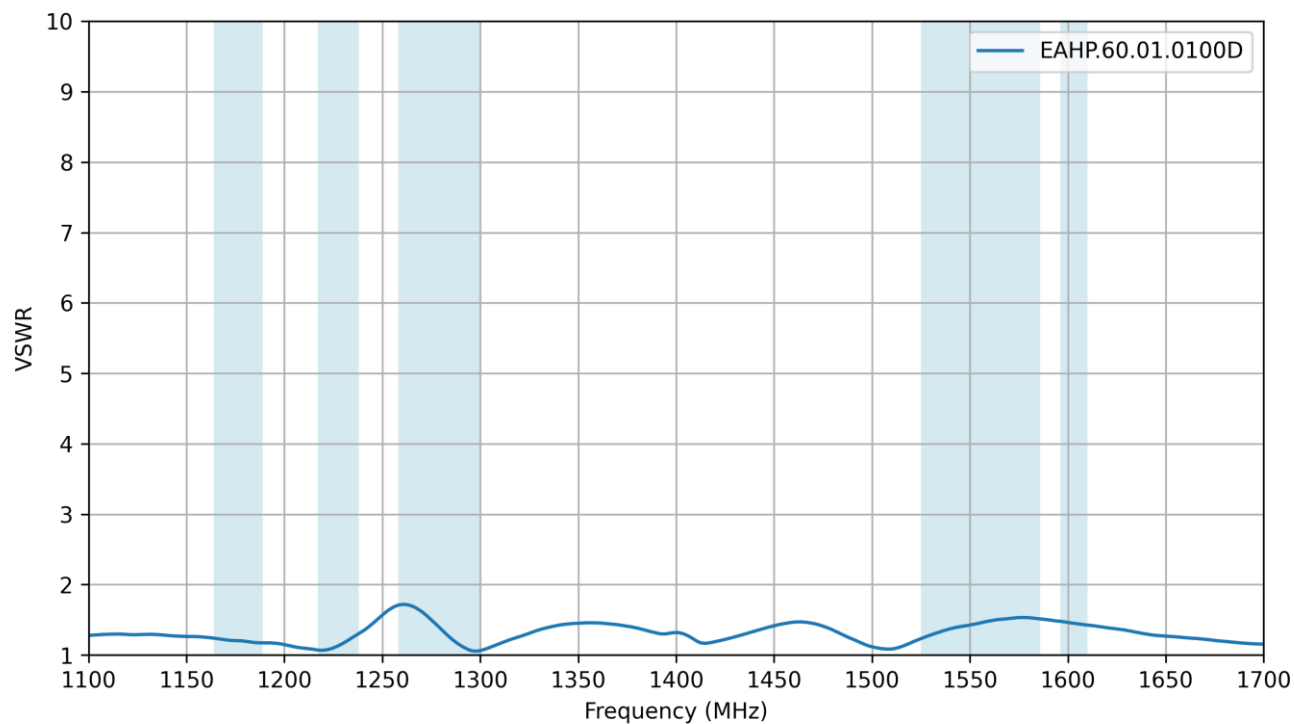


5.4 Efficiency

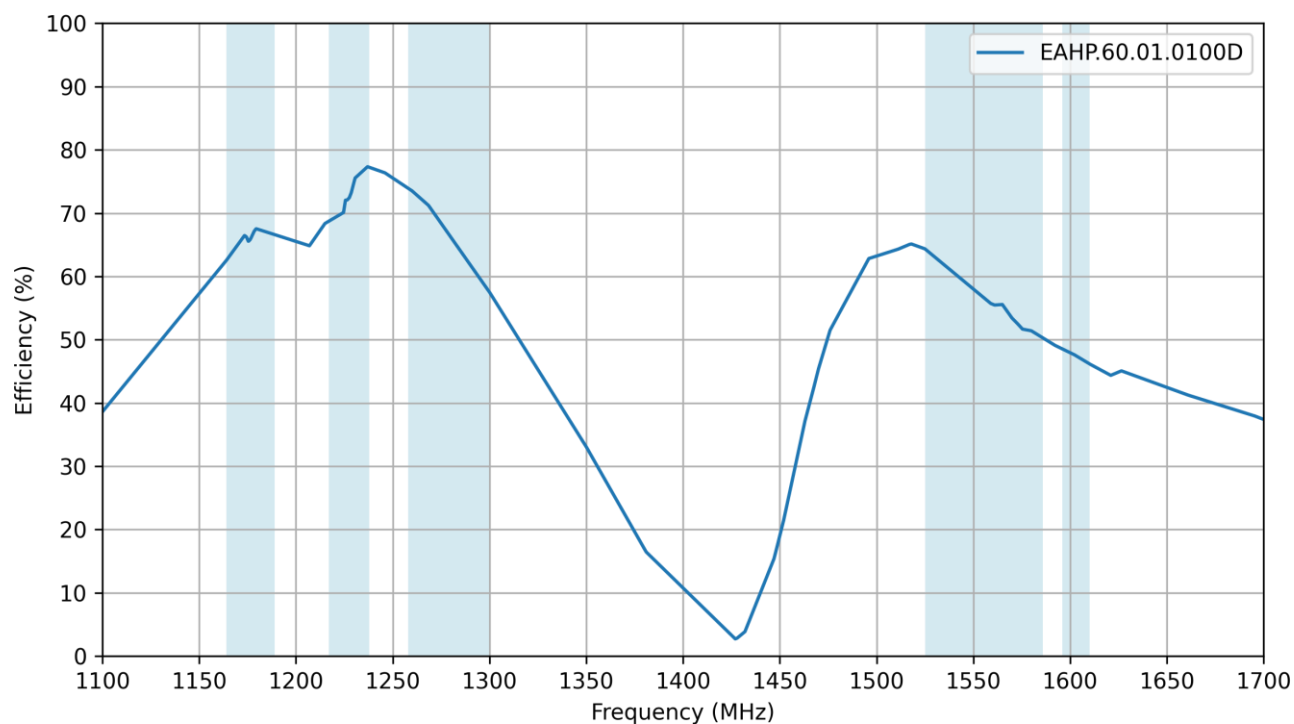


5.5 Average Gain

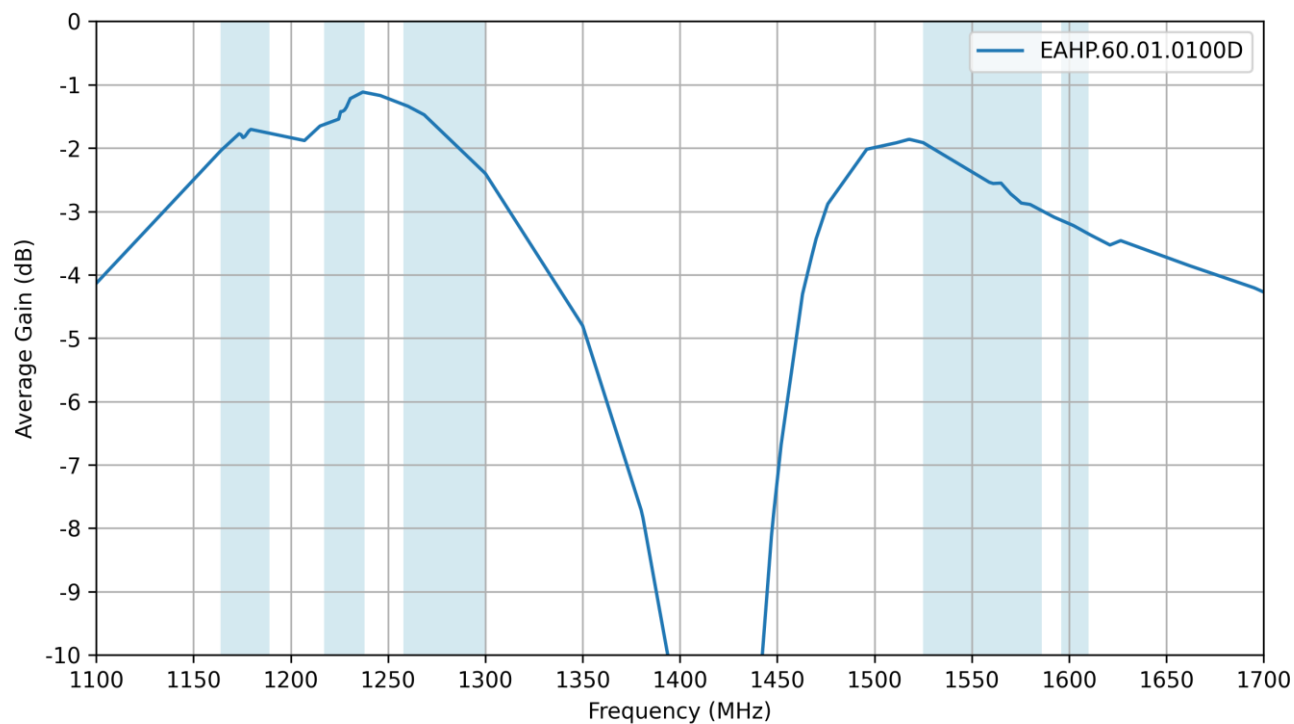


5.6 Peak Gain

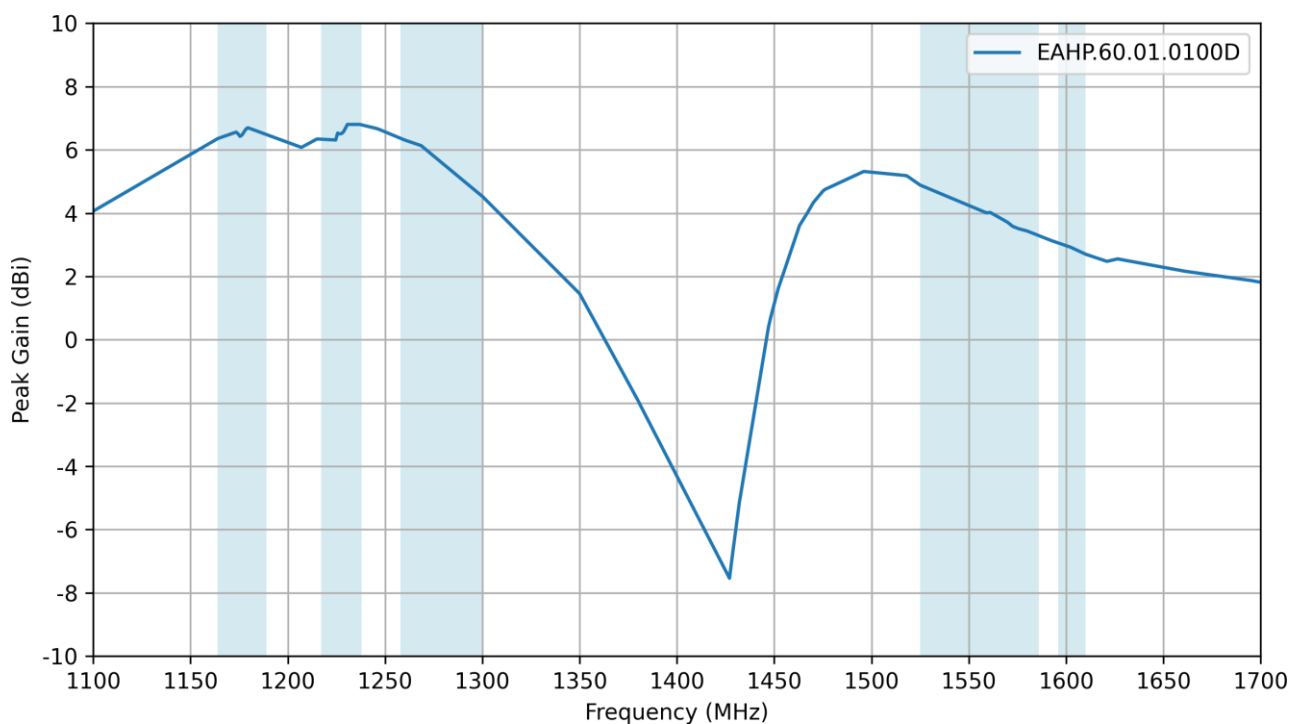


5.7 Axial Ratio

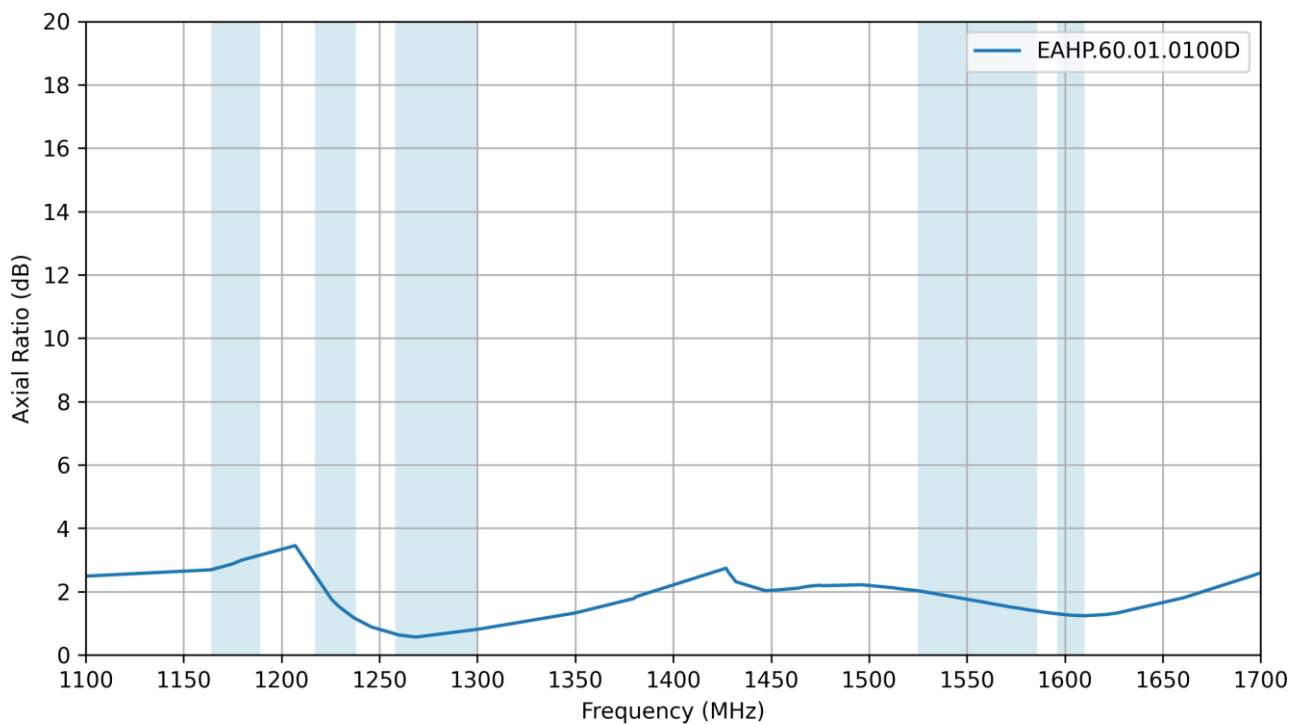


5.8 AR vs Angle for Phi=0

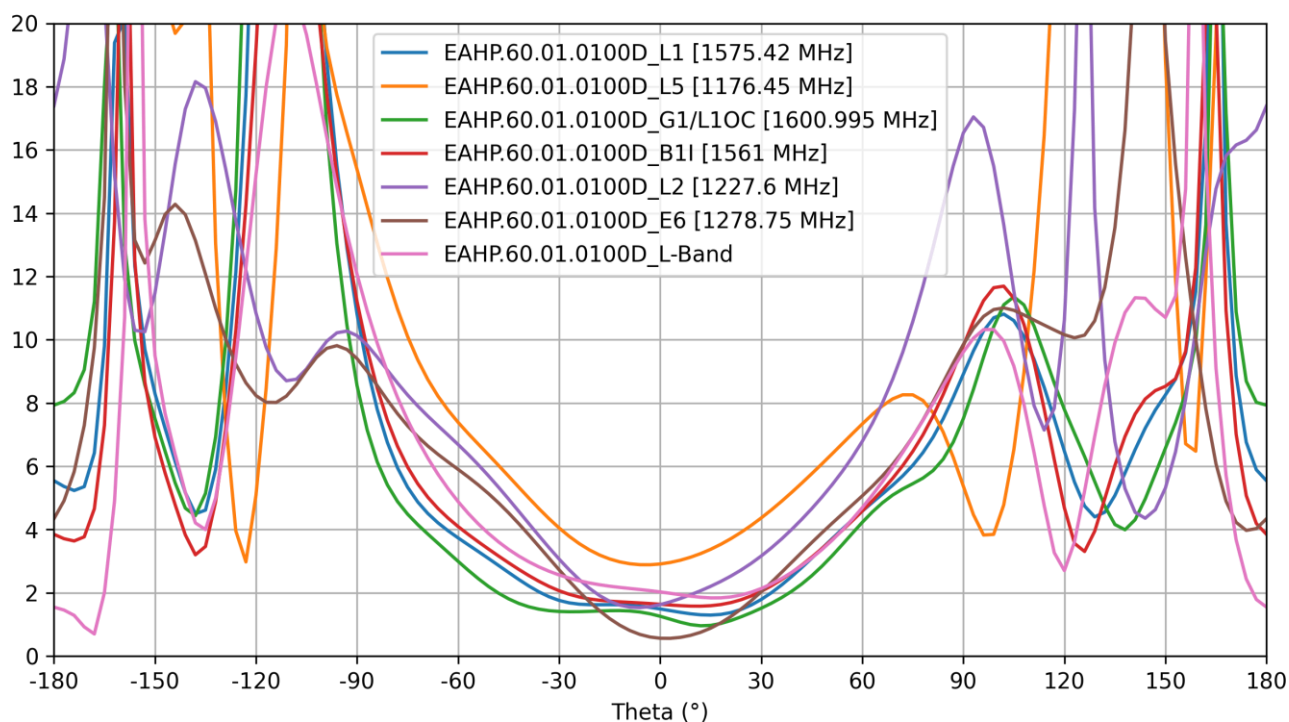


5.9 AR vs Angle for Phi=90

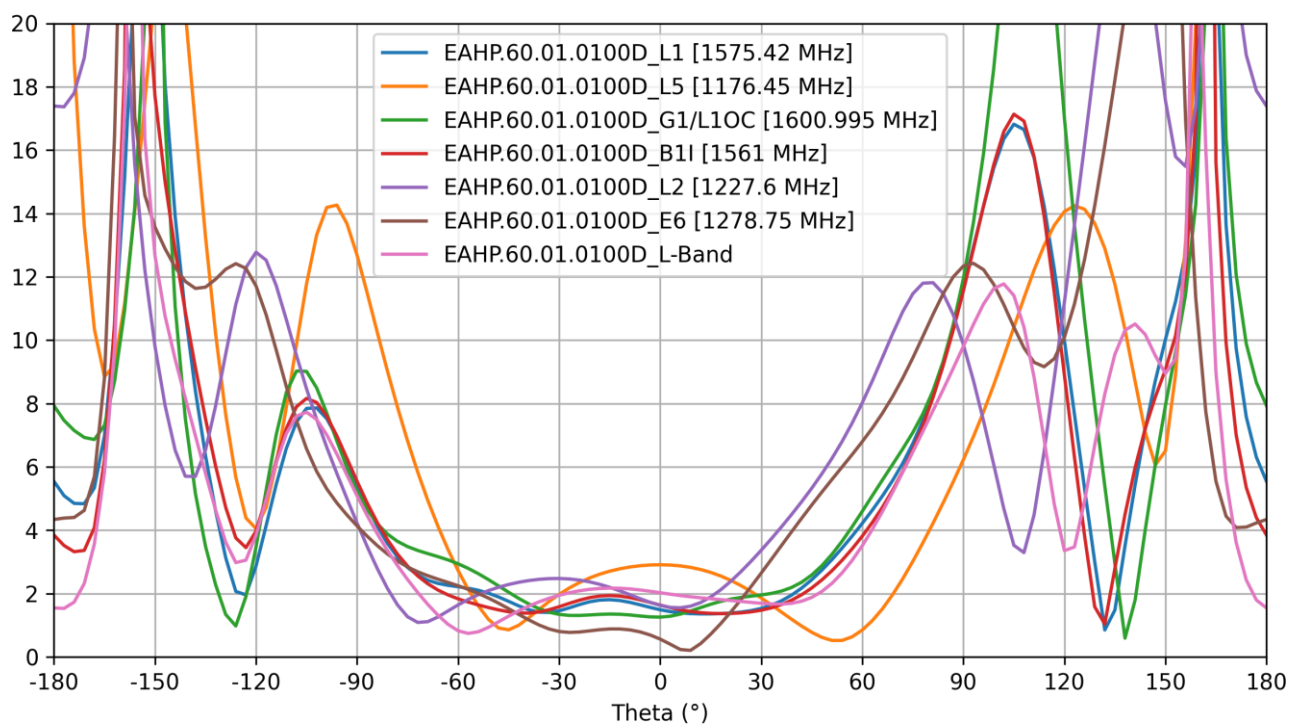


5.10 AR vs Angle for Theta=90

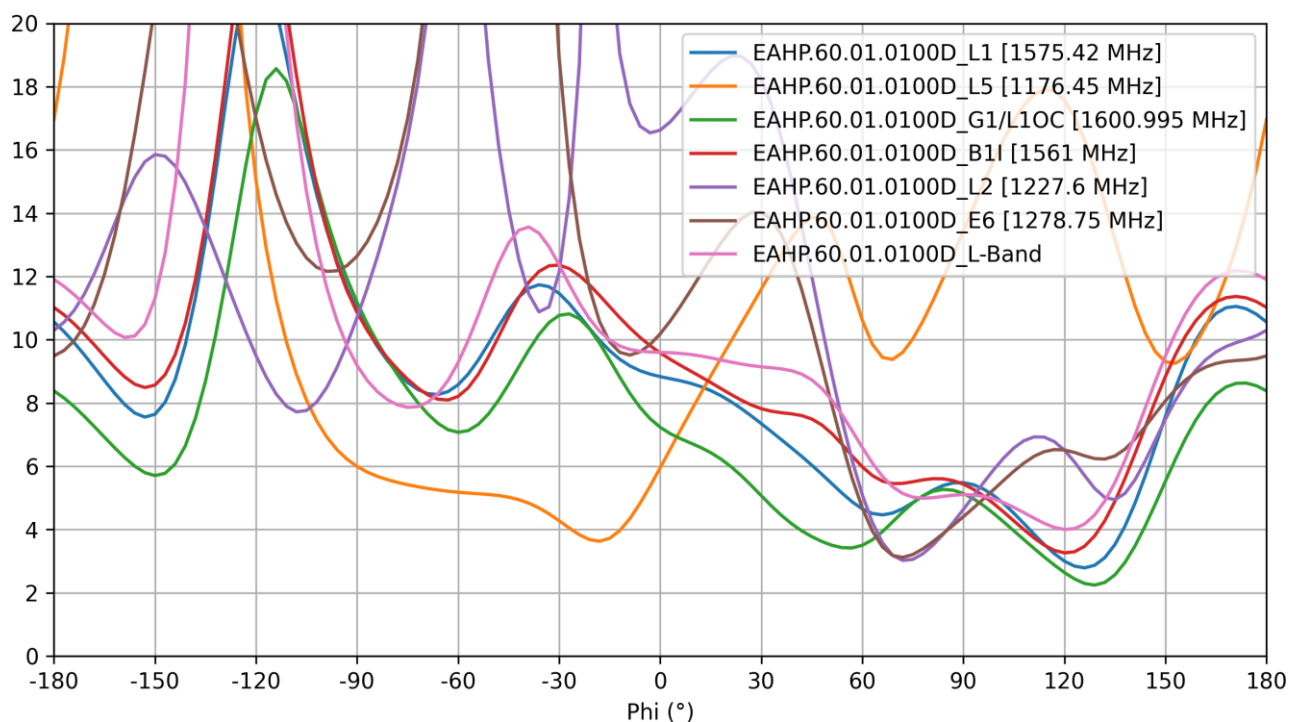

5.11 PCO


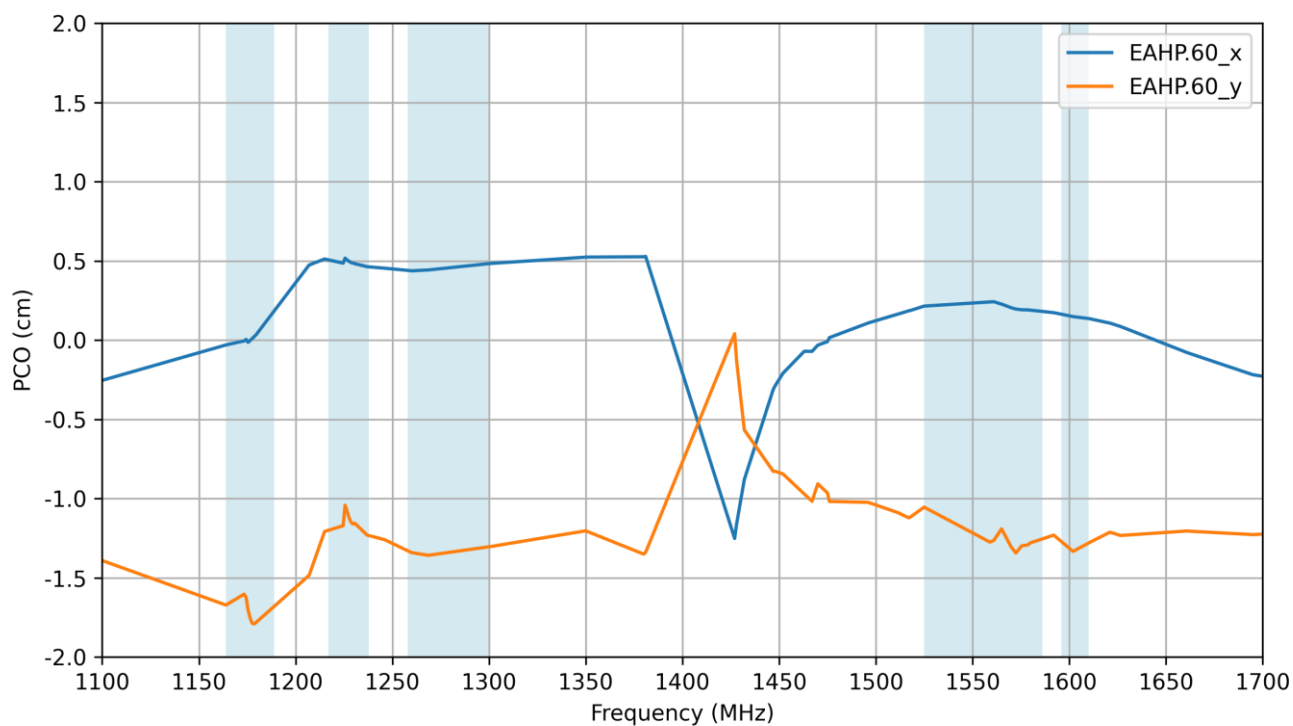


5.12 PCV

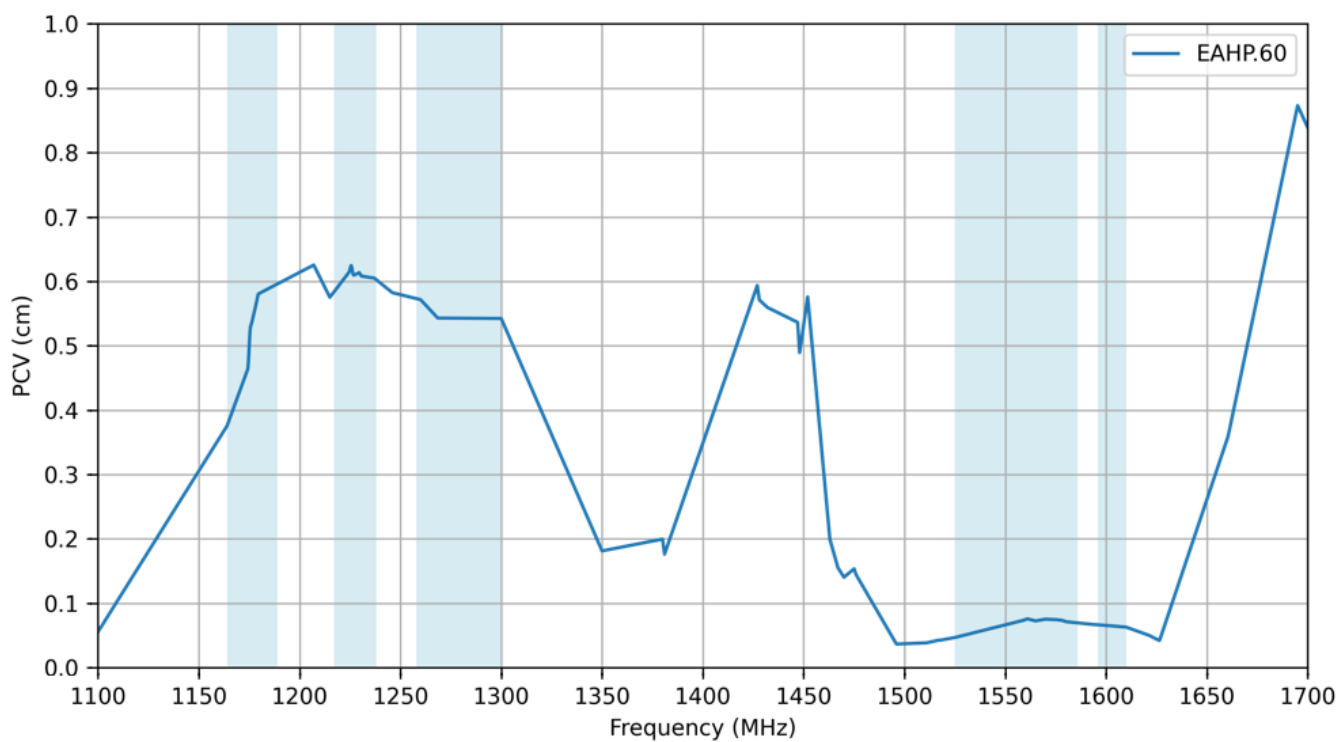



6. Radiation Patterns

6.1 Test Setup

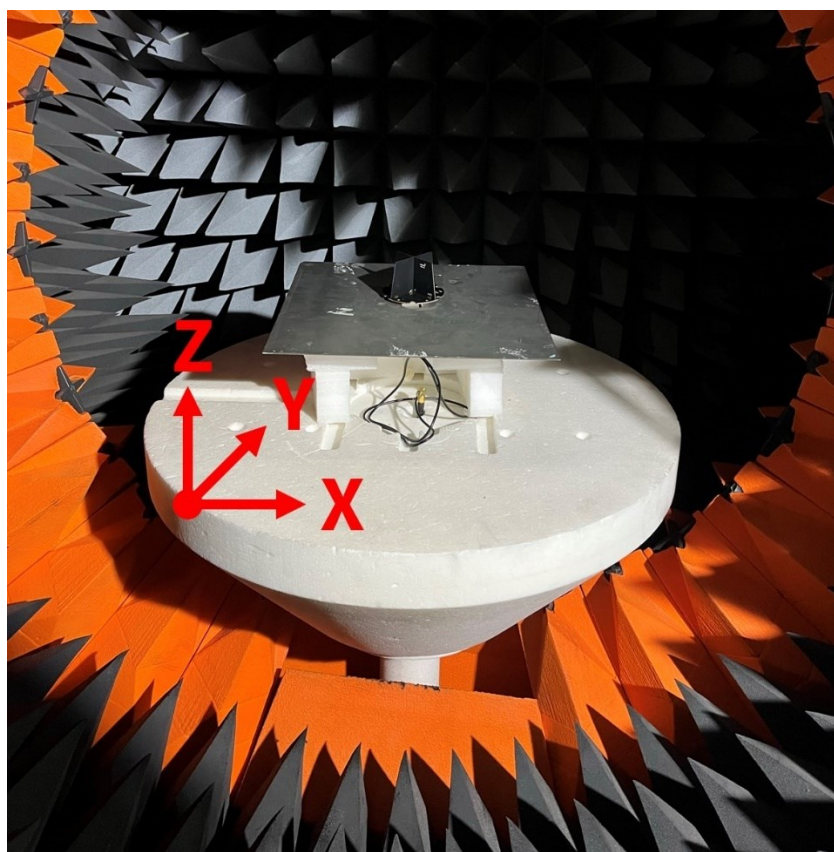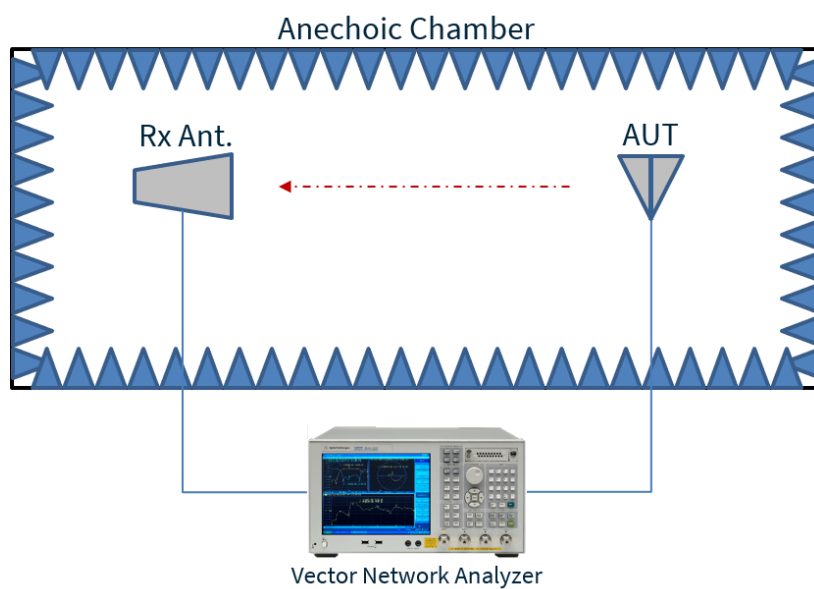


Chamber Test Set-up on a 30x30cm Ground Plane


6.2 Patterns at 1176 MHz

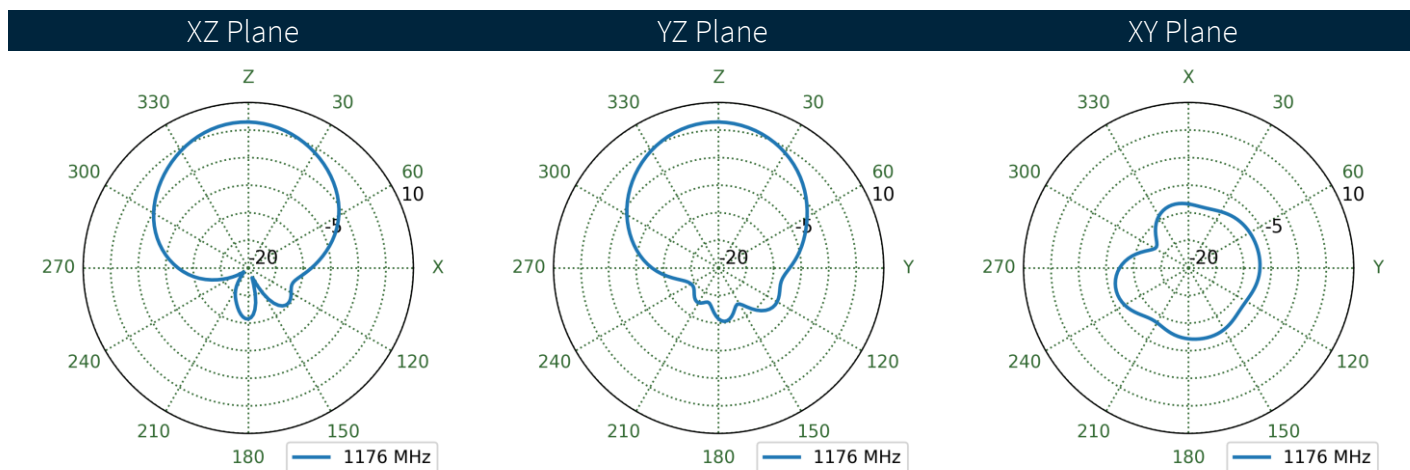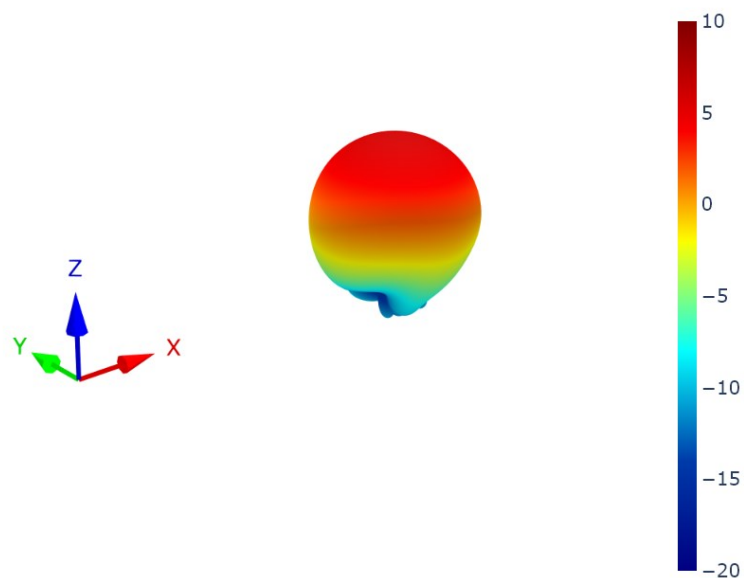


6.3 Patterns at 1228 MHz

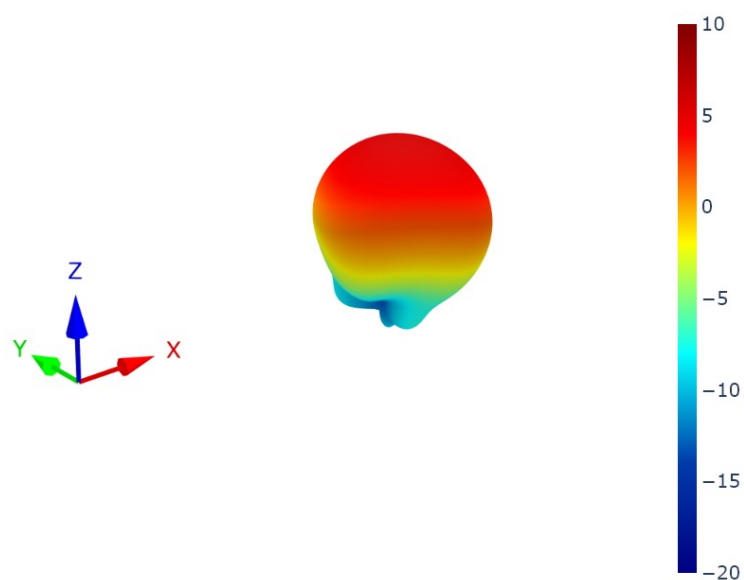


XZ Plane

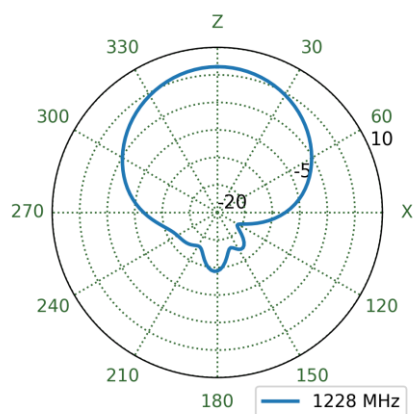


YZ Plane

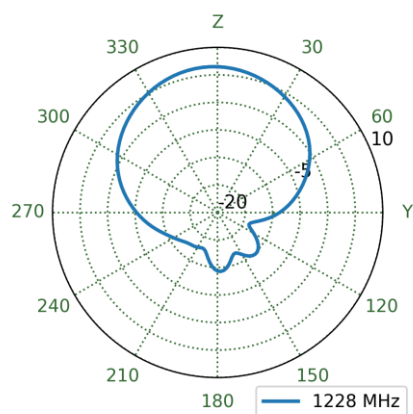


XY Plane

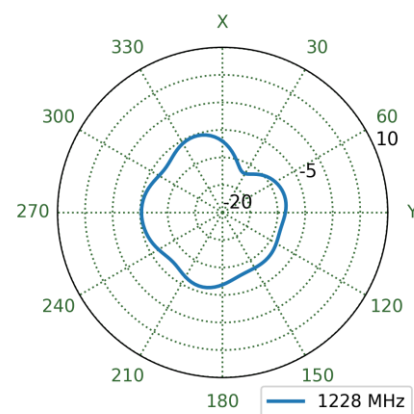


6.4 Patterns at 1278 MHz

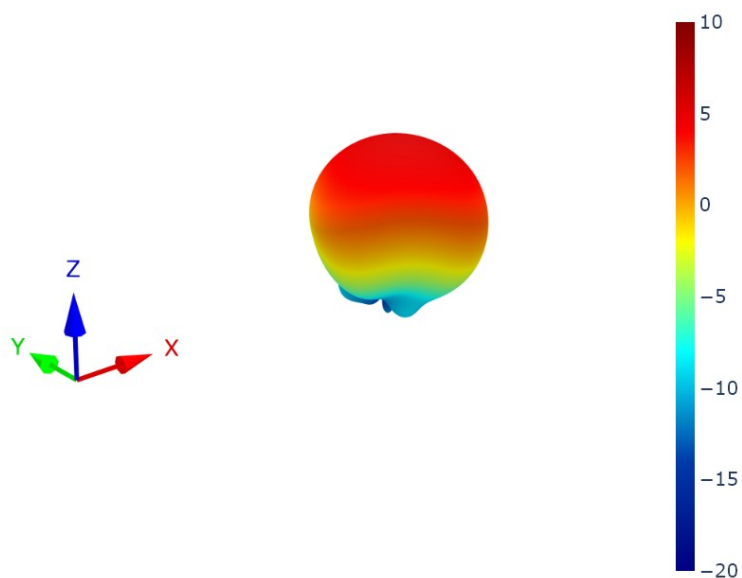


XZ Plane

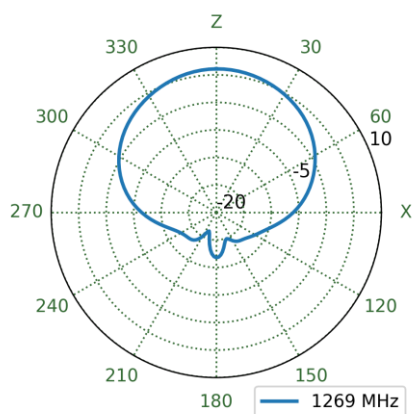


YZ Plane

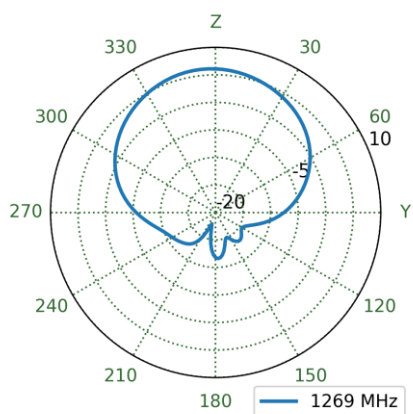


XY Plane

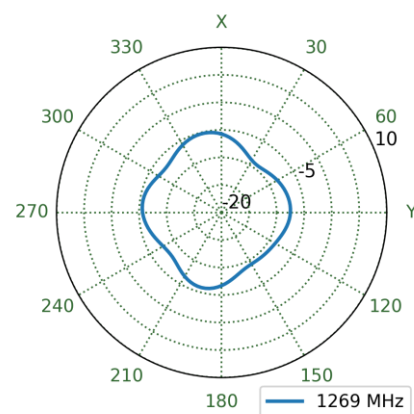


6.5 Patterns at 1542 MHz

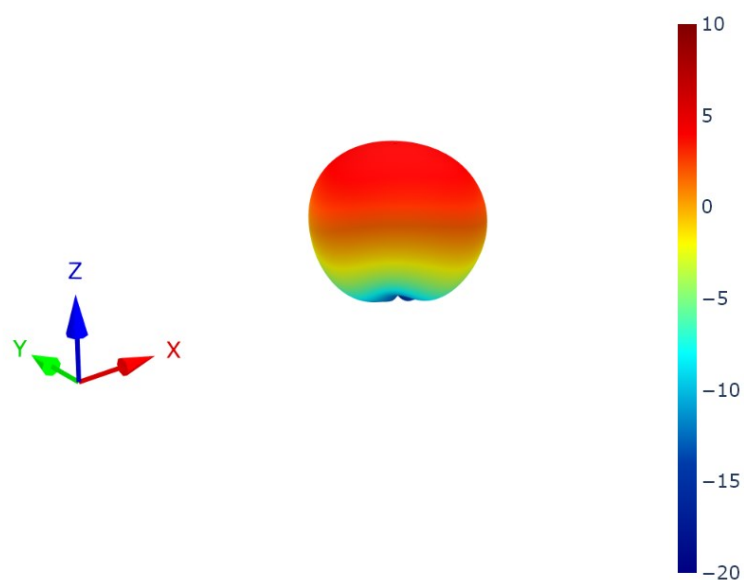


XZ Plane

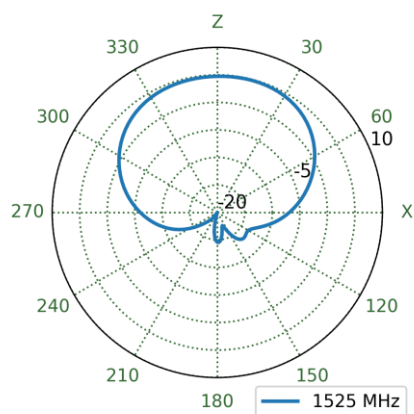


YZ Plane

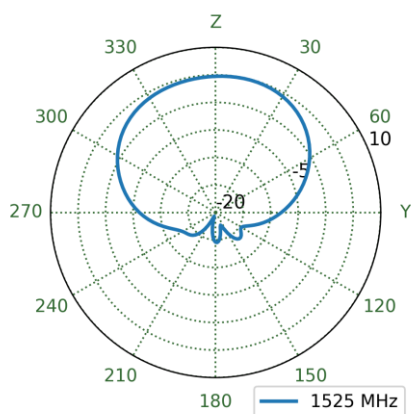


XY Plane

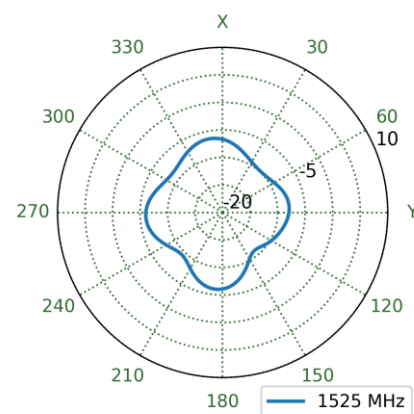


6.6 Patterns at 1561 MHz

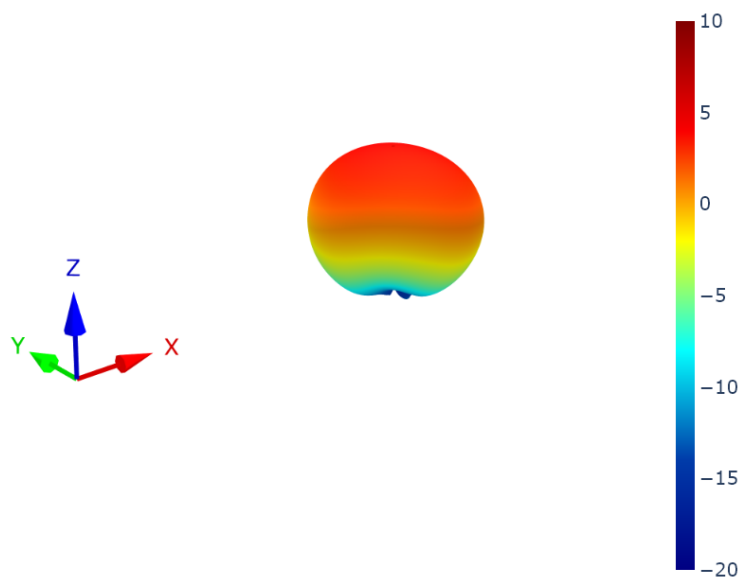


XZ Plane

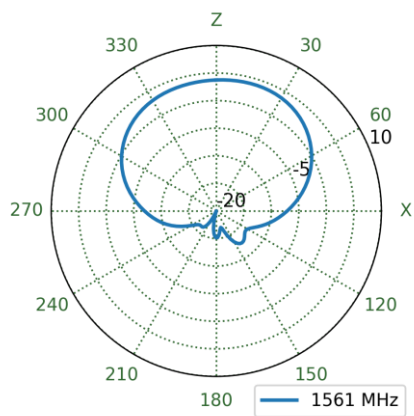


YZ Plane

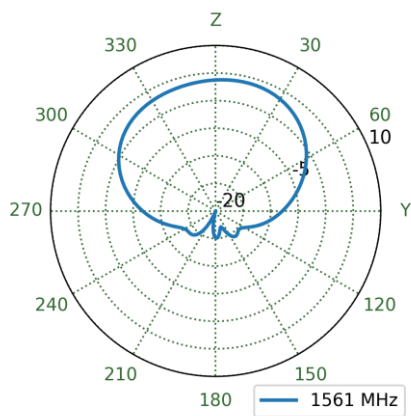


XY Plane

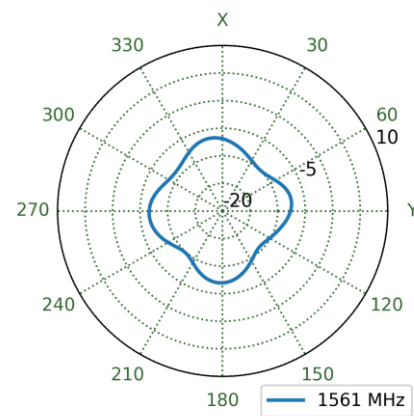


6.7 Patterns at 1576 MHz

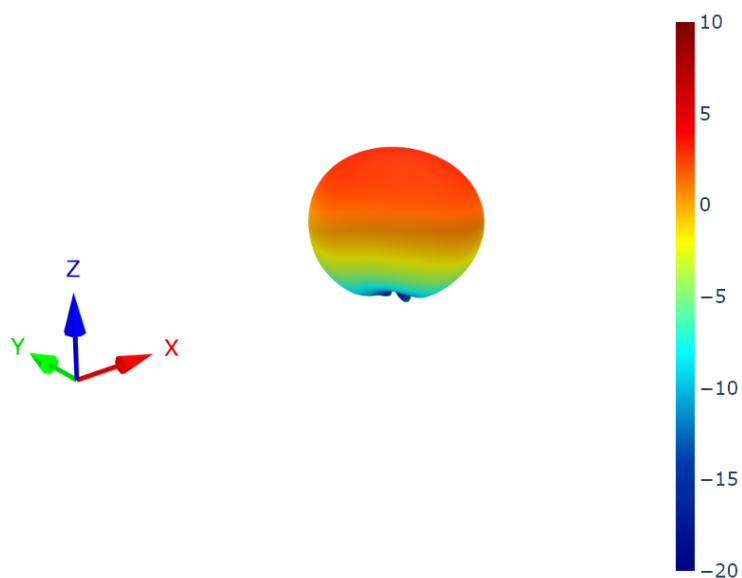


XZ Plane

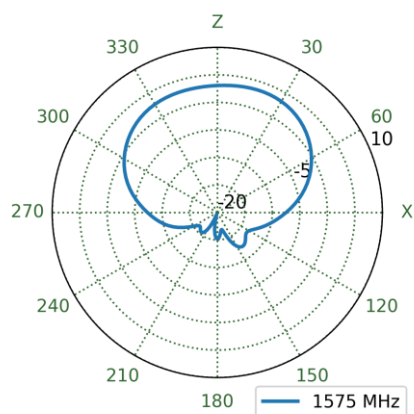


YZ Plane

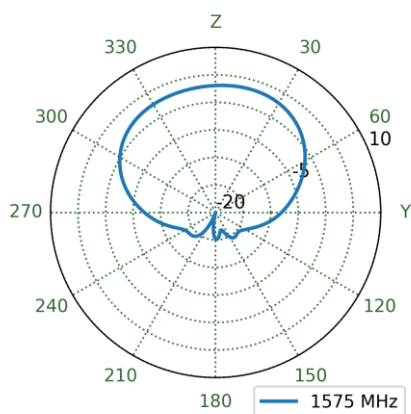


XY Plane

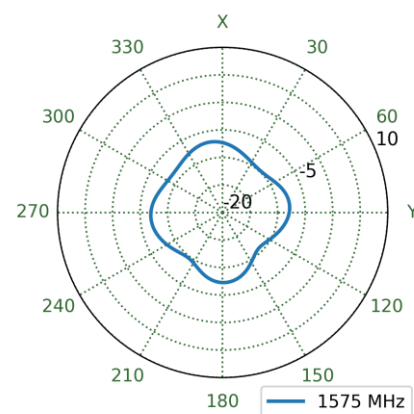


6.8 Patterns at 1602 MHz

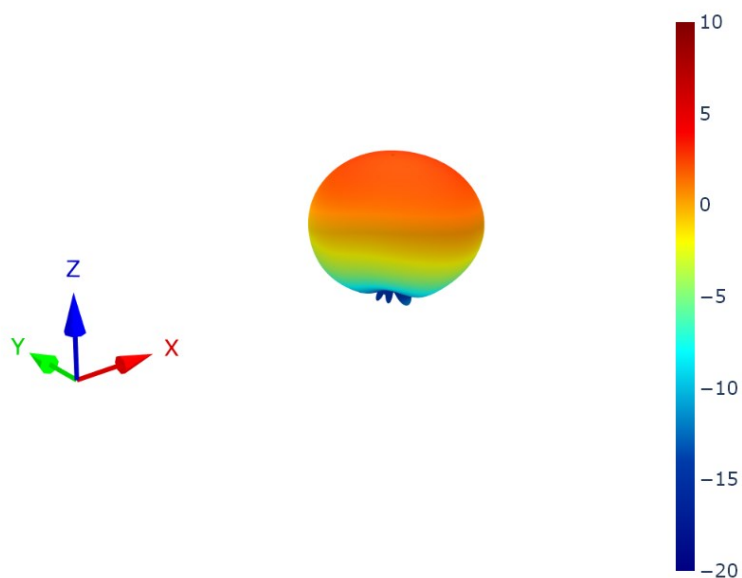


XZ Plane

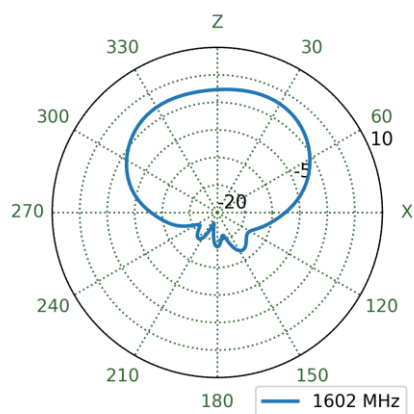

YZ Plane

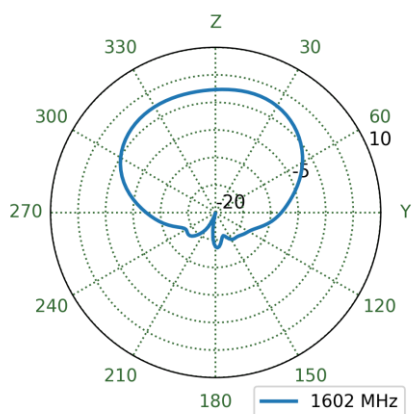


XY Plane

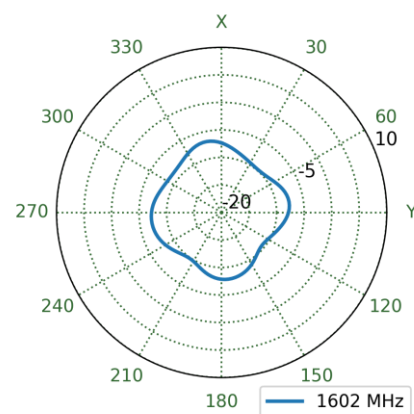


7. LNA Characteristics


7.1 Low-Band - Gain

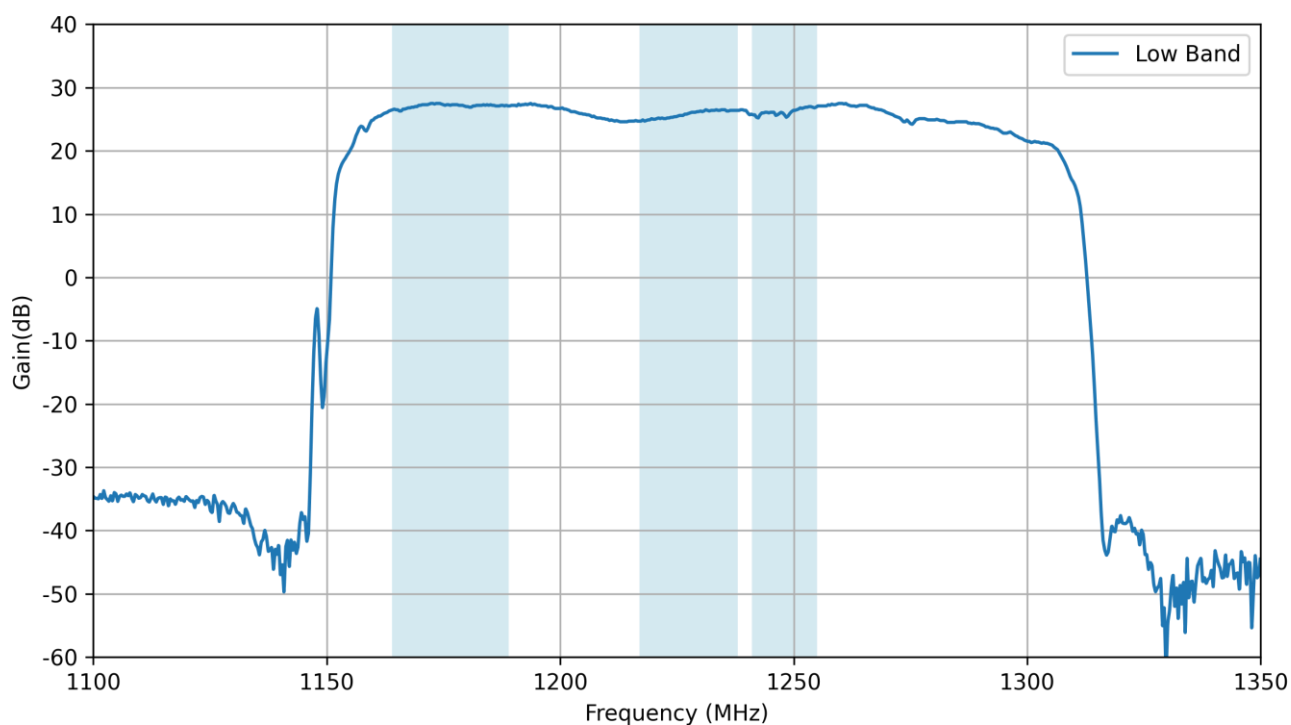


7.2 Low-Band – Noise Figure

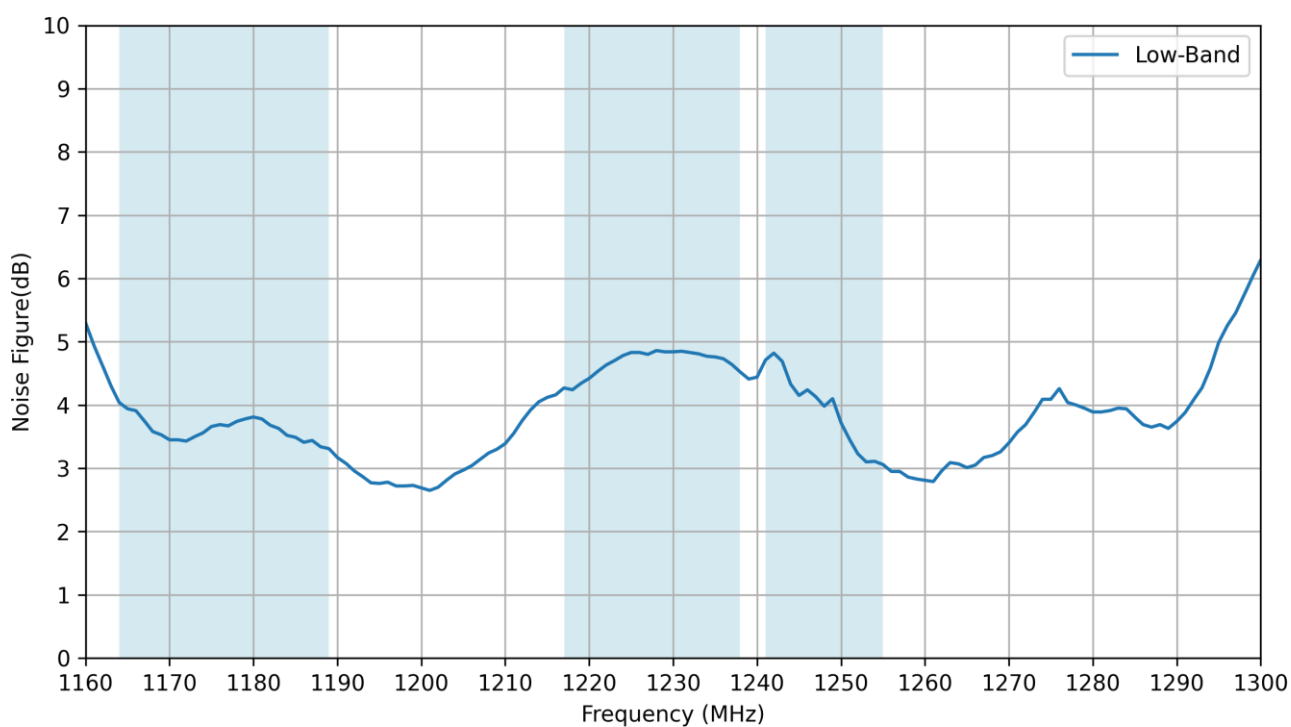


7.3 High-Band Gain

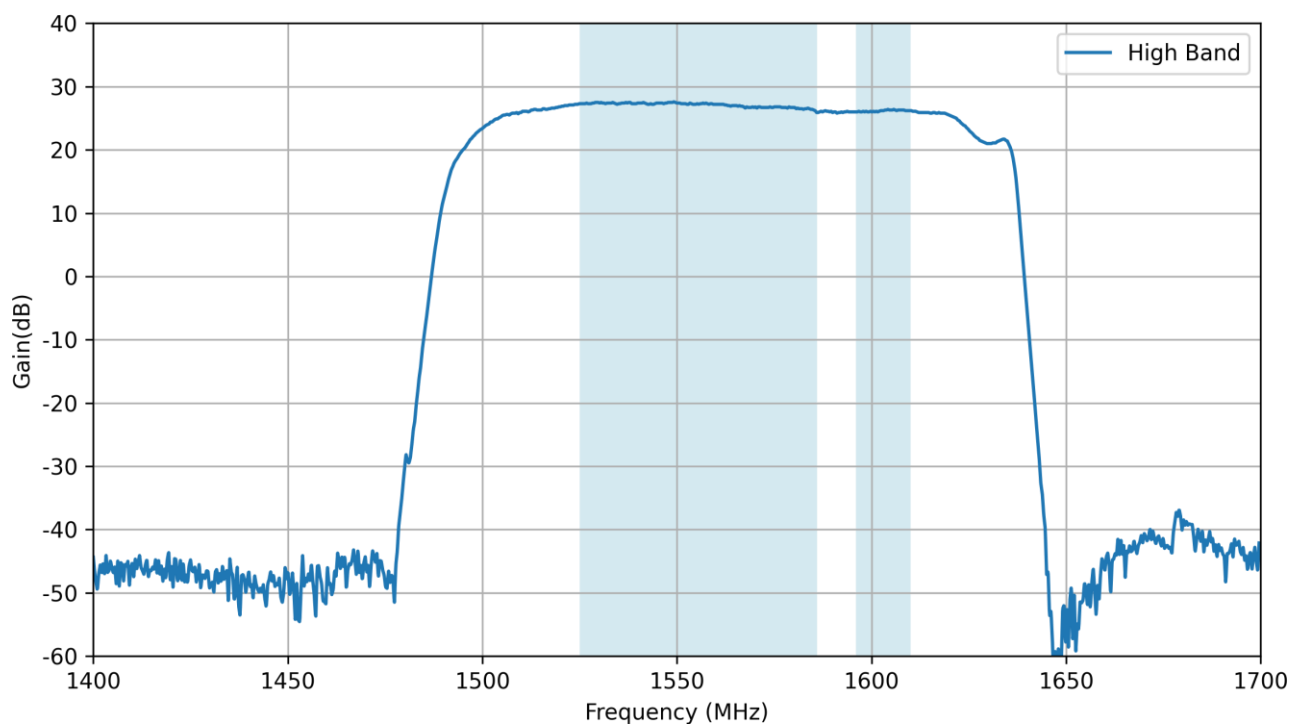

7.4 High-Band Noise Figure

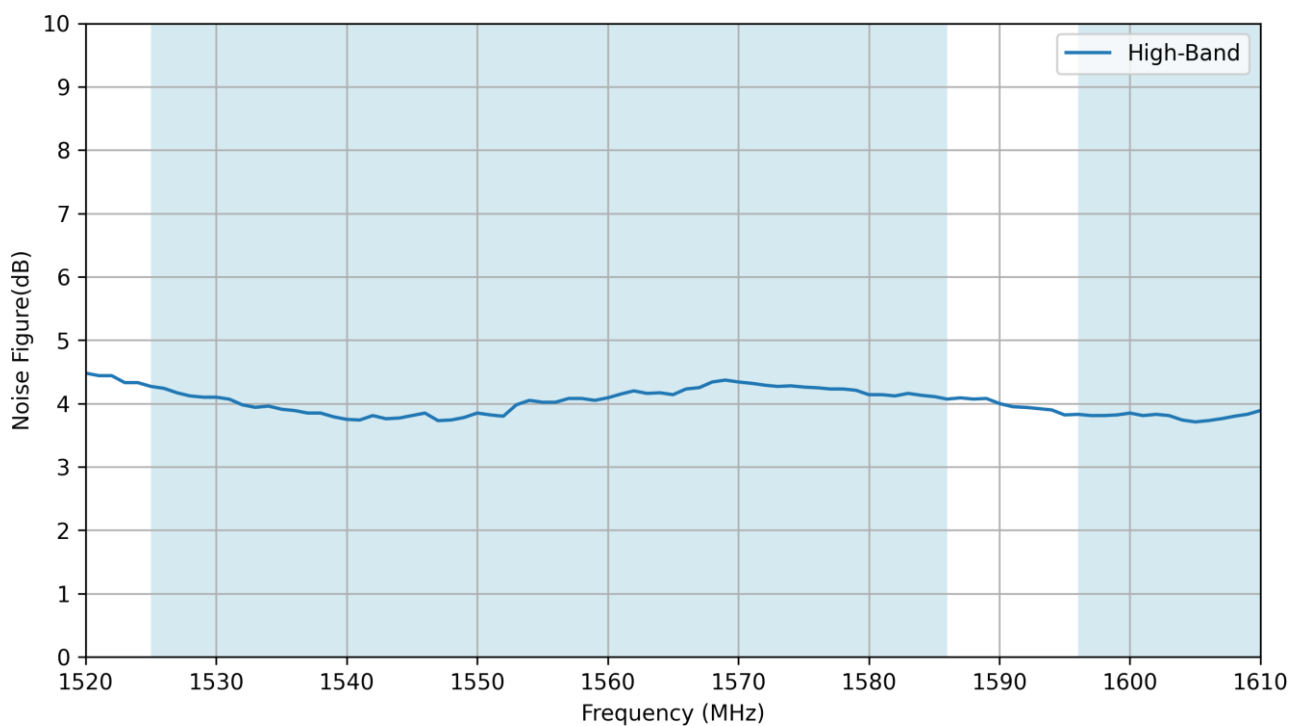

7.5 Out Of Band Rejection

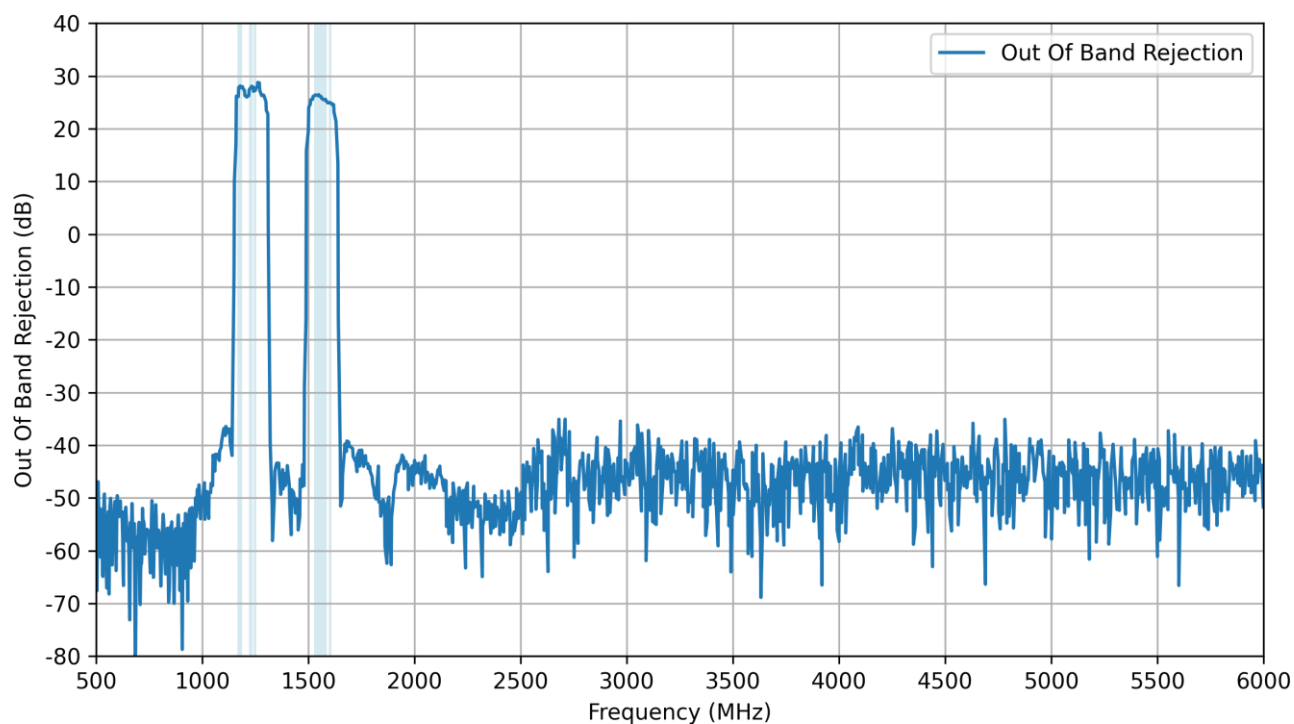

Changelog for the datasheet

SPE-24-8-246 – EAHp.60.01.0100D

Revision: A (Initial Release)

Date:	2024-10-03
Notes:	Initial Datasheet Release
Author:	Gary West

Previous Revisions



www.taoglas.com

