



TAOGLAS®



Datasheet

Part No:

XAHP.60.A.301111

Description

Active Multiband High Precision GNSS Permanent Mount

Features:

Embedded Active Antenna
Covering: L1/L2/L5 + L-Band
Permanent mount, robust IP67 rated enclosure
Dims: Ø94 x 57mm
Cable: 3m RG-174 with SMA(M) ST connector
RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	7
4.	Packaging	8
5.	Antenna Characteristics	9
6.	Radiation Patterns	16
7.	LNA Characteristics	24
	Changelog	27

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas XAHP.60 is a Permanent Mount active multi-band GNSS antenna that has been carefully designed for high performance cm-level positional accuracy on the full GNSS spectrum. Bands covered include GPS/QZSS L1/L2/L5, GLONASS G1/G2/G3, Galileo E1/E5a/E5b/E6, BeiDou B1/B2a/B2b/B3, L-Band, QZSS L6, NAVIC L5, as well as SBAS (WAAS/EGNOS/GAGAN/SDCM/SNAS. This allows the user to achieve higher location accuracy, as well as stability of position tracking in urban environments with their device.

The XAHP.60 has excellent performance across the full bandwidth of the antenna and its design has an even gain across the hemisphere giving almost excellent, broad axial ratio which in turn makes it resilient to multipath rejection and excellent phase centre stability. The LNA used in the XAHP.60 ensures excellent out of band rejection and provides excellent positioning stability and reliability of GNSS signals.

Typical applications for the XAHP.60 include:


- Autonomous Driving
- Precision Positioning for Robotics
- Precision Agriculture
- Inventory Management & Container tracking
- Telematics & Asset Tracking
- Timing Accuracy Synchronization

The XAHP.60 is the latest addition to an ongoing product road map of high precision antennas by Taoglas. For RTK applications, when used on the base and/or the rover, the XAHP.60 can achieve genuine cm-level accuracy.

Cable and connectors are fully customizable, and the XAHP.60 is also available in white (XAHP.60.W.301111). Please contact your regional Taoglas customer support team for further information.

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■

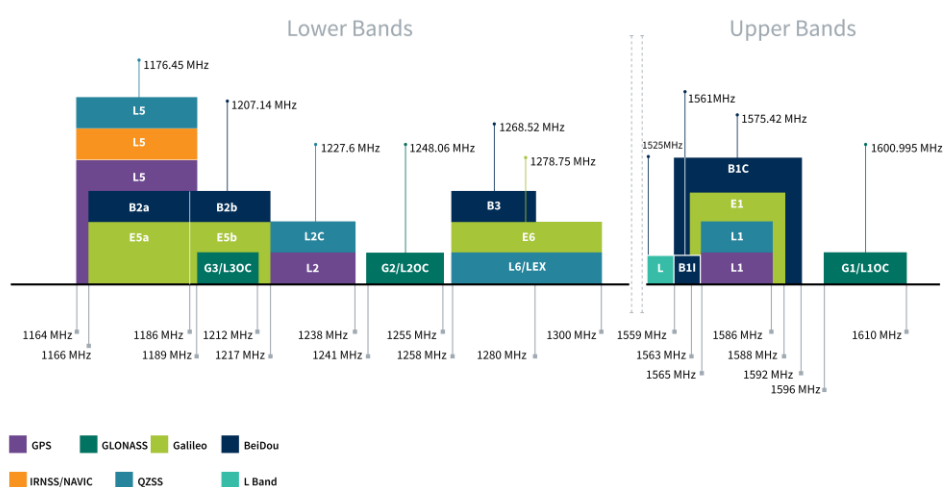

GNSS Bands and Constellations

GNSS Electrical									
Frequency (MHz)	1176.45	1207	1227.6	1248	1278.75	1542	1561	1575.42	1603
VSWR (max.)	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1
Passive Antenna Efficiency (%)	65.84	66.6	72.85	75.74	67.42	60.04	55.58	52.95	47.65
Passive Antenna Gain at Zenith (dBic)	6.67	6.24	6.76	6.76	6.27	4.74	3.74	3.74	2.57
Axial Ratio (dB)	2.94	3.08	1.7	0.89	0.66	1.84	1.63	1.51	1.27
PCO_x (cm)	0.05	0.49	0.49	0.45	0.45	0.22	0.23	0.2	0.15
PCO_y (cm)	-1.68	-1.34	-1.14	-1.27	-1.33	-1.16	-1.24	-1.27	-1.28
PCV (cm)	0.5	0.6	0.6	0.6	0.5	0.1	0.1	0.1	0.1
Group Delay Mean (ns)	9.65	10.69	10.89	12.47	12.17	11.23	11.3	10.85	10.8
Polarization	RHCP								
Impedance	50 Ω								
Tested on a 30x30cm Ground Plane									

LNA and Filter Electrical Properties									
Frequency (MHz)	1176.45	1207	1227.6	1248	1278	1542	1561	1575.42	1603
VSWR (max.)	<2								
Gain (dBic)	27.3	25.3	25.9	25.3	25.0	27.1	27.2	26.2	26.2
Noise (dBic)	3.7	3.1	4.8	3.9	4	3.8	4.2	4.3	3.8
Voltage In	1.8V~5.5V								
ESD	20KV for Contact and 30KV for Air								
Out Of Band Rejection	-70dB for frequencies <1GHz -60dB for frequencies <1.7GHz								
Power Consumption (mA)	22								
LTE Band 13 interference filter circuit									

Mechanical	
Dimensions	Ø94 x 57mm
Weight	395g
Connector	SMA(M) ST
Cable	3m of RG-174

Environmental	
Operation Temperature	-40°C to 85°C
IP Rating	IP67
Relative Humidity	Non-condensing 65°C 95% RH
RoHS Compliant	Yes
REACH Compliant	Yes


3. Mechanical Drawing

ISO NO.: EDW.002440


STATE: Release

NOTES: 1. All material must be RoHS compliant.
2. "*" Critical Dimensions.

REV.	DESCRIPTION	ENG.	APPROVED	DATE
001	Initial Design	Aron	Chozen	2024/5/6
002	Amend dimension.	Aron	Chozen	2024/9/9

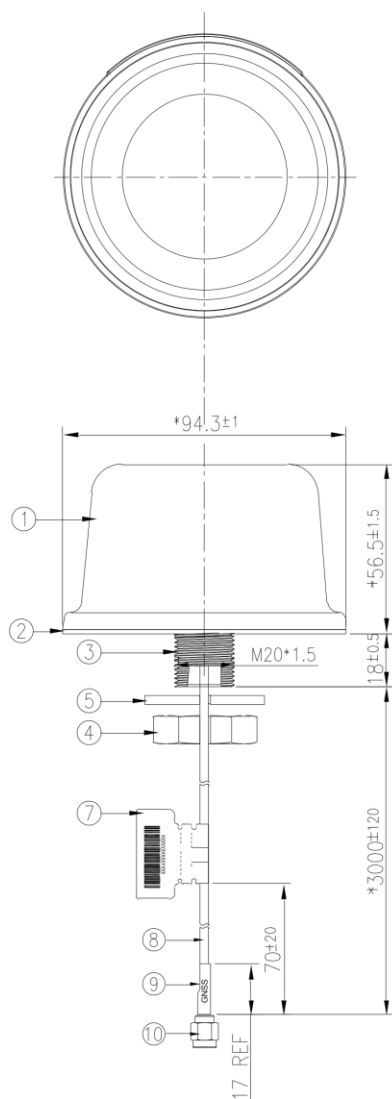

Bottom Thread View




Name	Material	Finish	QTY
1 Min. S1 Short Case	ASA/C9MC PW-978B	Black	1
2 Adhesive Foam Mini S1 (Black foam)	3M9448BK+CR4305	Black/White Liner	1
3 Mini S1 Base	Zinc Alloy	Ni Plated	1
4 Nut M20x1.5P9.5H Cut	Steel Carbon	Zn-Ni Plated	1
5 Washer D41	Steel Carbon	Zn-Ni Plated	1
6 Capse Rubber	Silicone Rubber	Black	1
7 Empty Label	PEPA	White	1
8 RG174 Coaxial Cable	PVC	Black	1
9 Heat Shrink Tube (GSS)	PE	Blue Tube/White Text	1
10 SMA(M)S1	Brass	Au Plated	1


APPROVED BY: Chozen	TAOGLAS. TW Design Centre This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas. TITLE : Active Multi-band GNSS Permanent Mount Antenna with 3m RG-74 & SMA(M) PART NO. : XAHP.60.A.301111
CHECK BY: Aaron	
DRAWN BY: Aron	
DATE: 2024/5/6	
UNLESS OTHERWISE SPECIFIED: TOLERANCES ON: XX ± 0.5 1.4 ± 0.3 X2 ± 0.2 X3 ± 0.1 XXX ± 0.05	UNIT: mm
THIRD ANGLE PROJECTION	SCALE: 1:2
	PAGES: 1/1
	REV: D02

4. Packaging

1pc XAHP.60.A.301111 per Small Box
 Dimensions – 135 x 30 x 140mm
 Weight - 395g

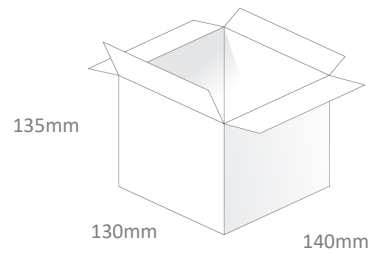

8pcs XAHP.60.A.301111 per Carton
 Dimensions – 588 x 296 x 142mm
 Weight – 4Kg

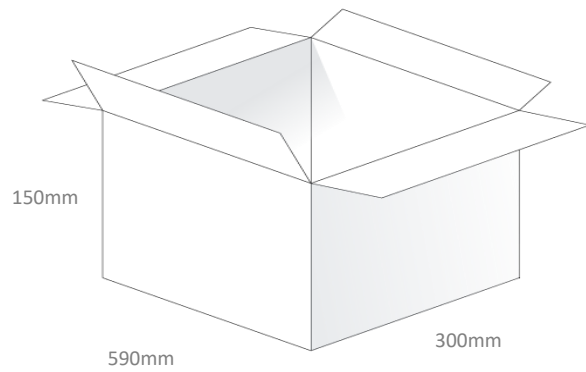


5. Antenna Characteristics

5.1 Test Setup

AUT




Vector Network Analyzer

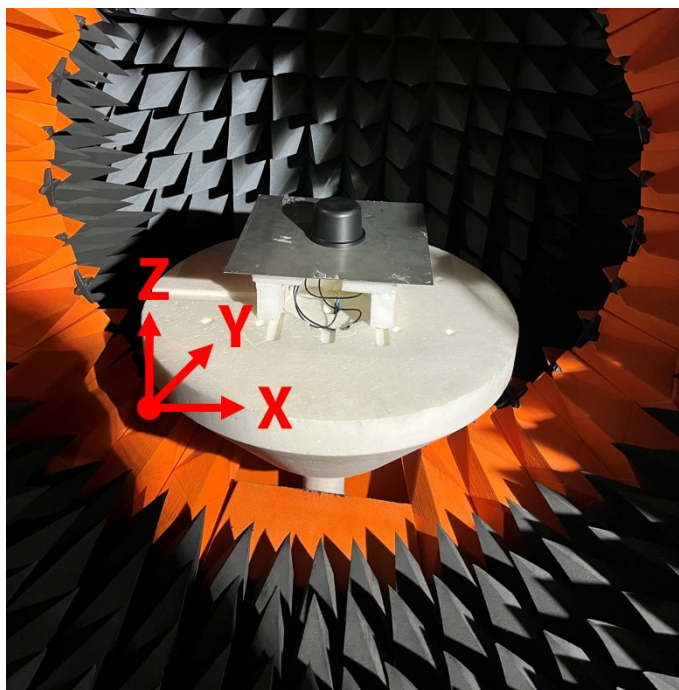


VNA Test Set-up on a 30x30cm Ground Plane


5.2 Return Loss

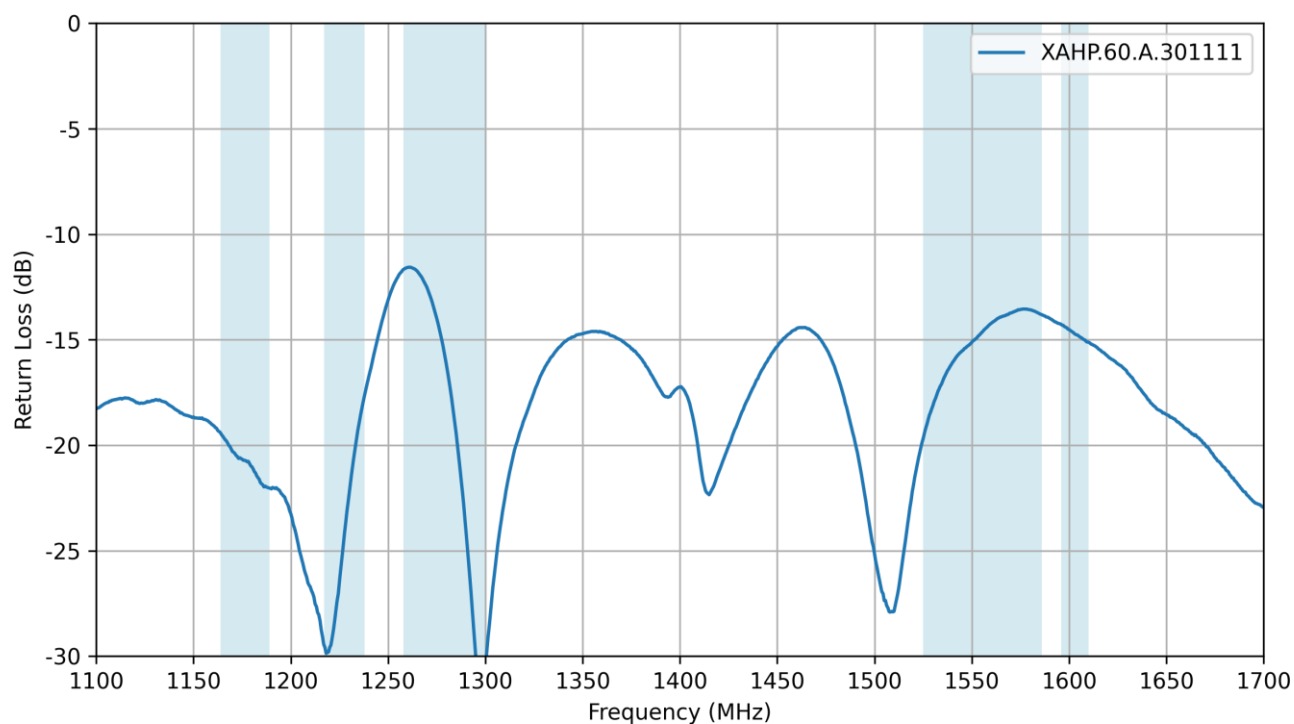


5.3 VSWR

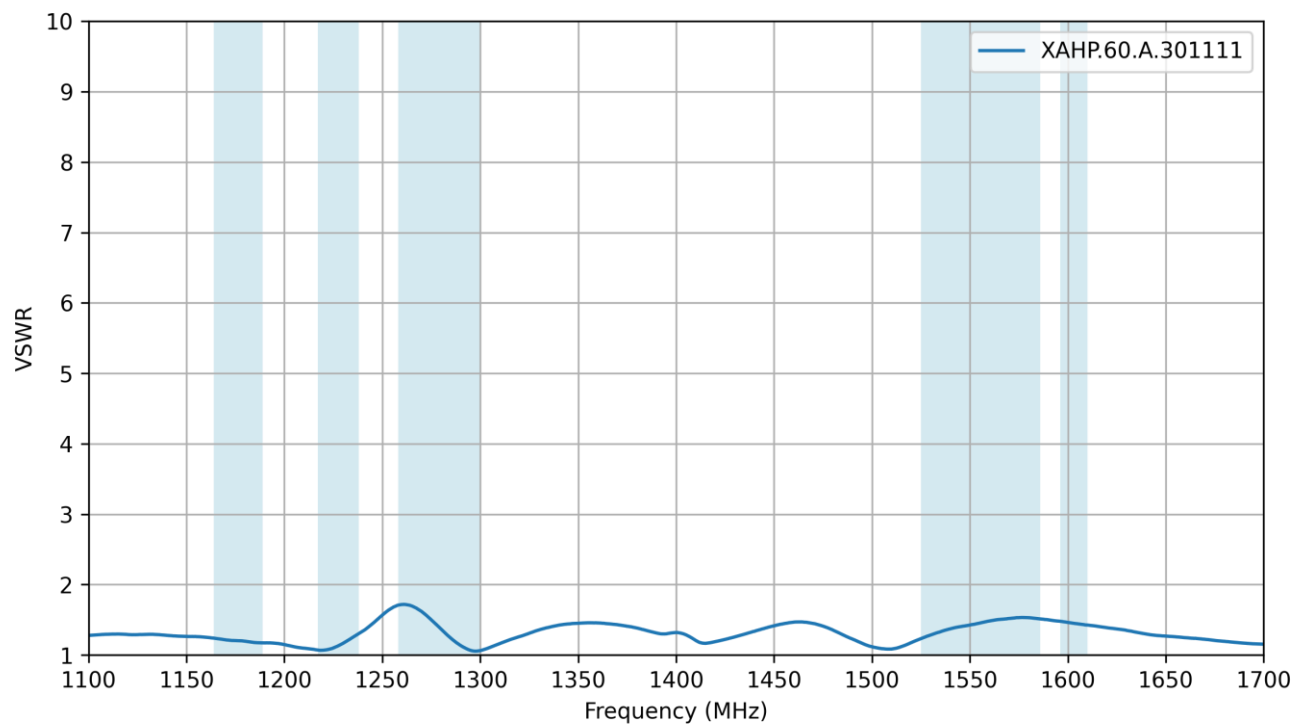


5.4 Efficiency

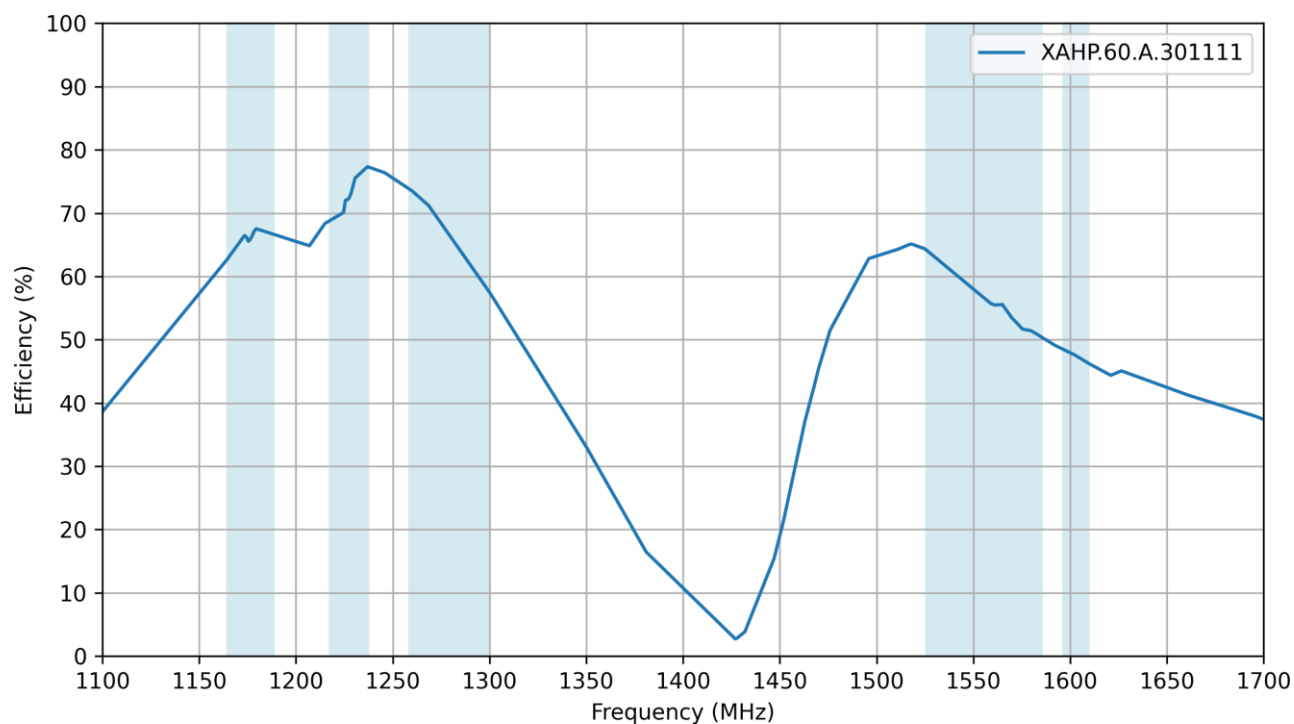


5.5 Average Gain

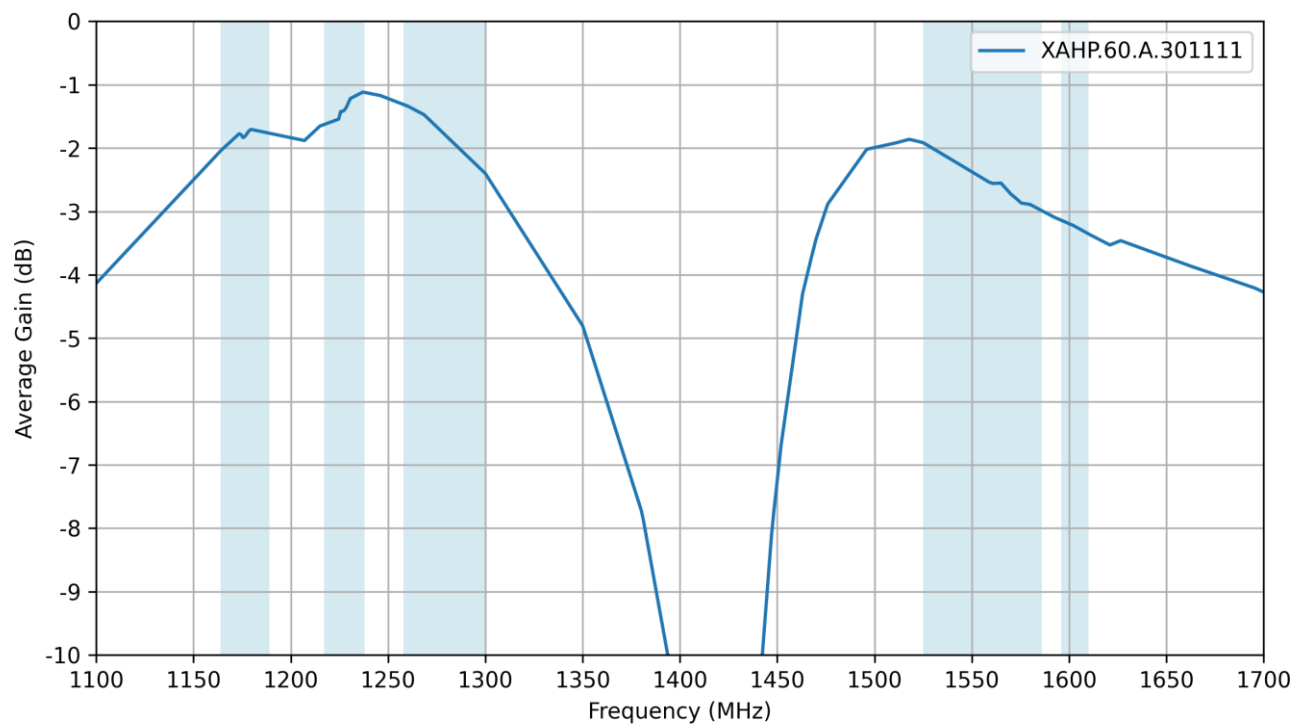


5.6 Peak Gain

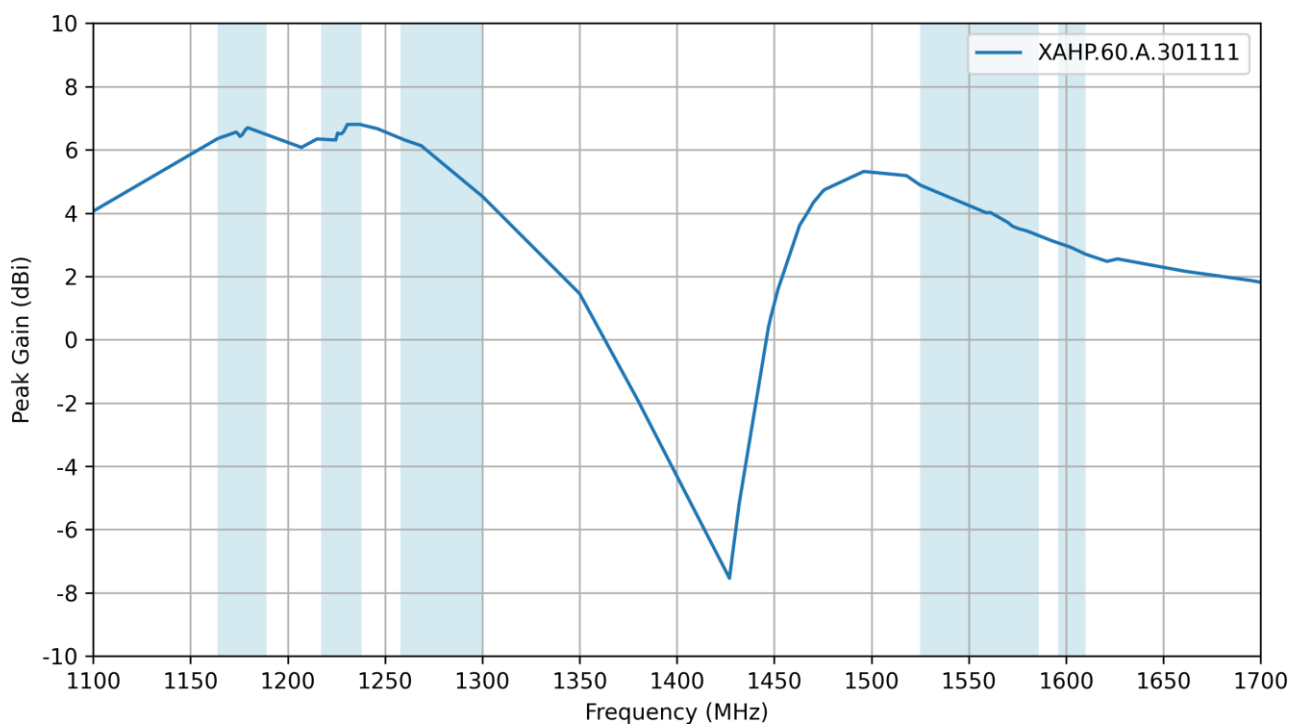


5.7 Axial Ratio

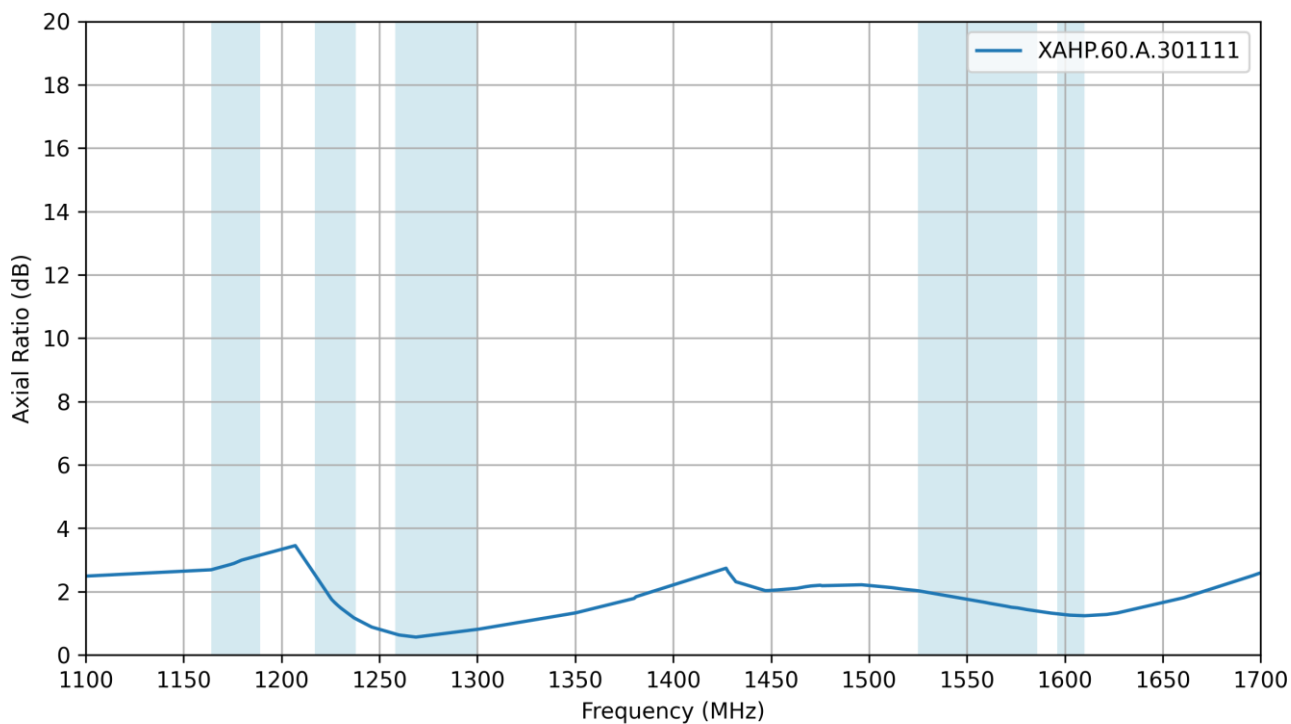


5.8 AR vs Angle for Phi=0

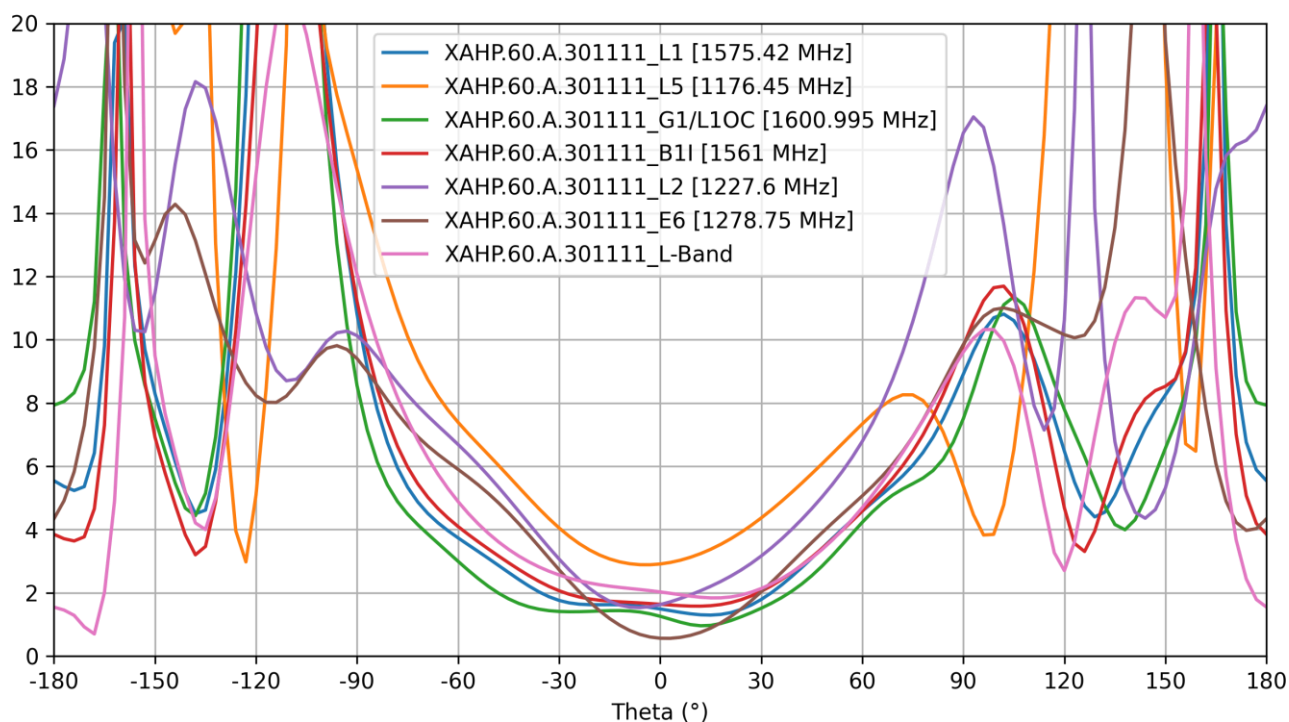


5.9 AR vs Angle for Phi=90

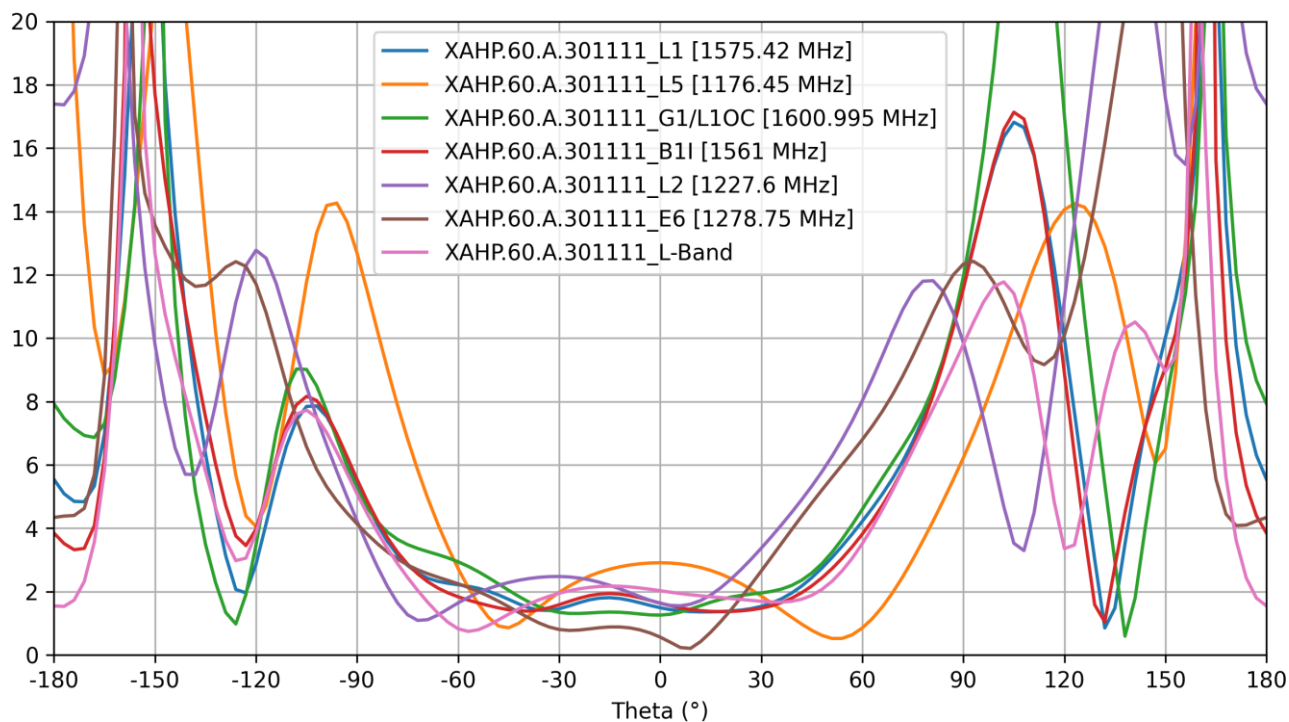


5.10 AR vs Angle for Theta=90

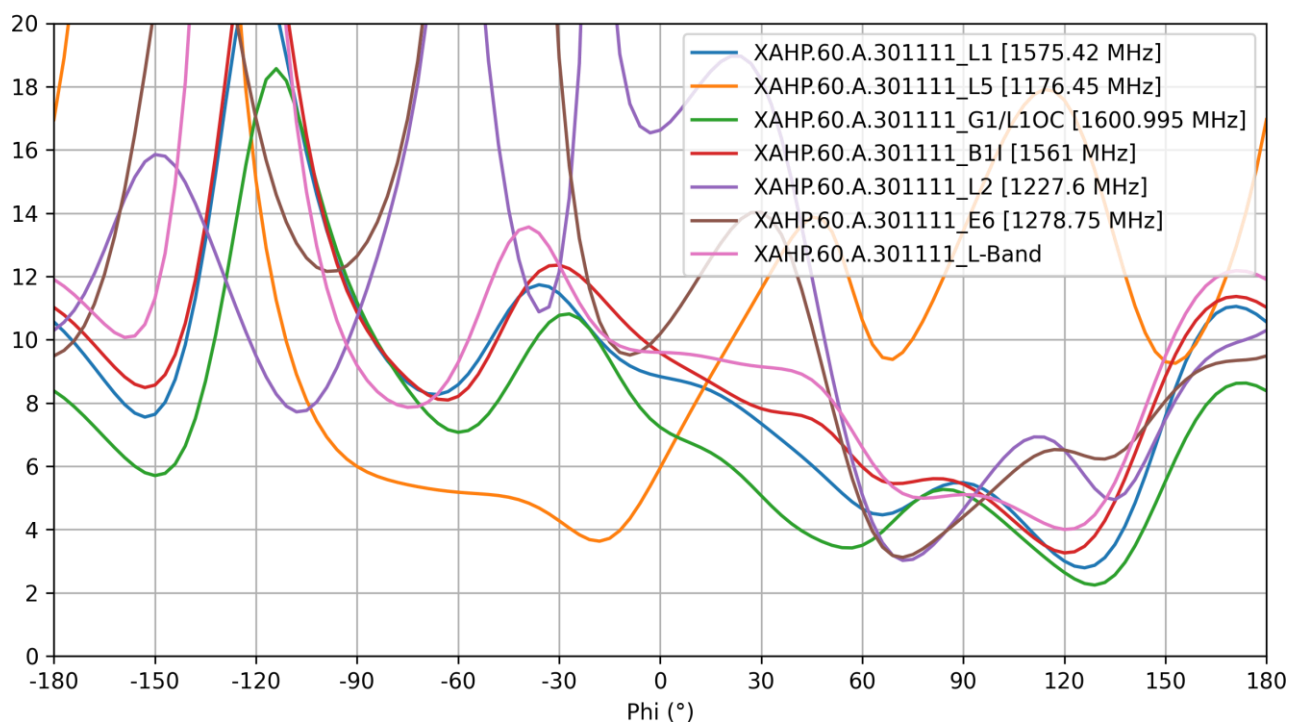

5.11 PCO


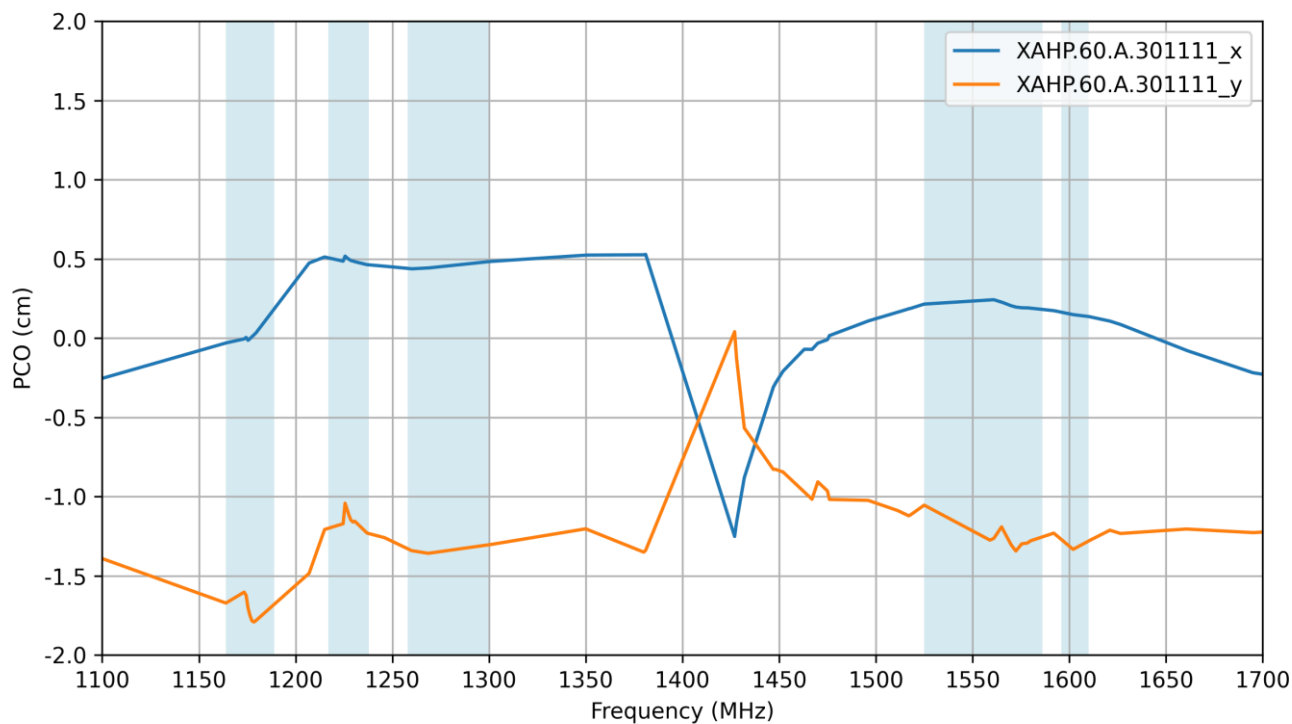


5.12 PCV

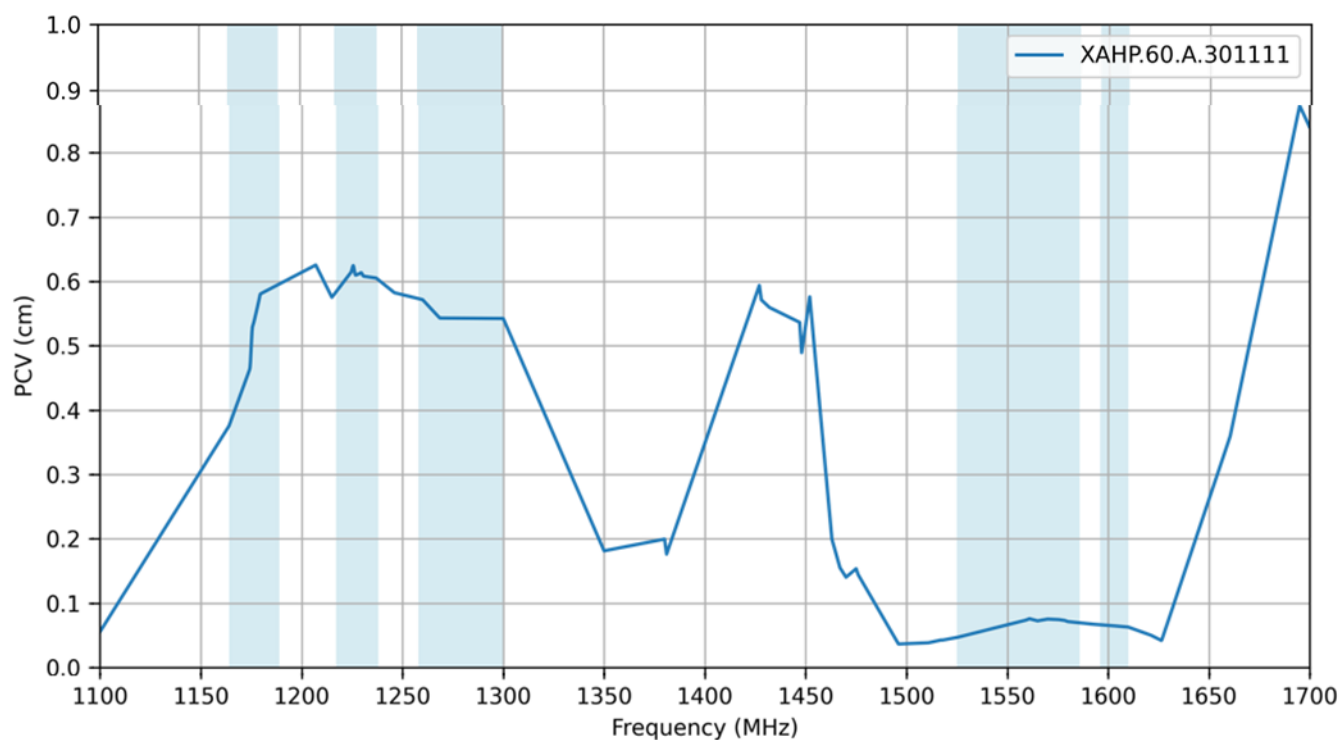


6. Radiation Patterns

6.1 Test Setup

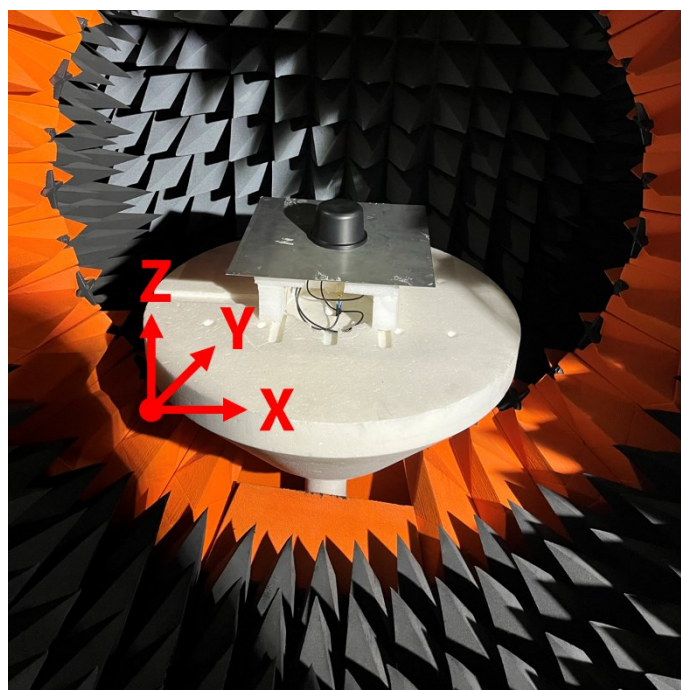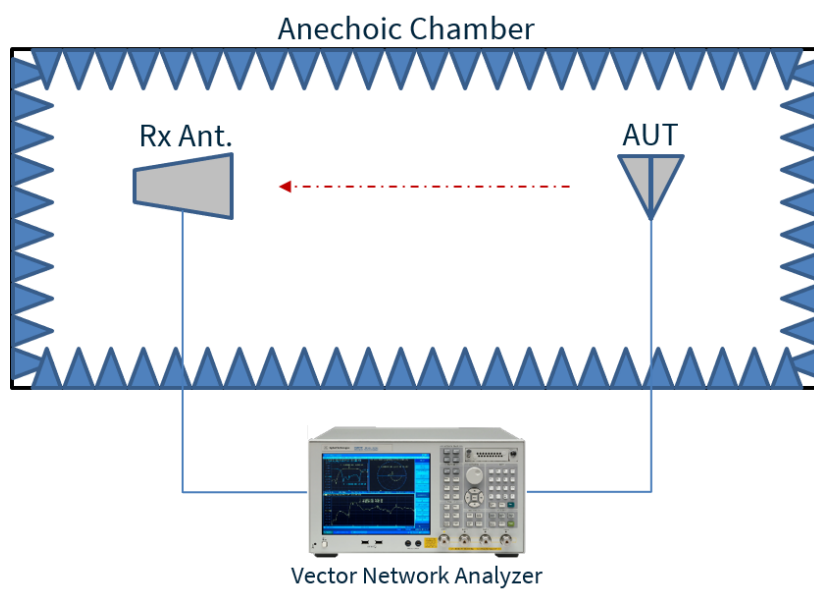


Chamber Test Set-up on a 30x30cm Ground Plane


6.2 Patterns at 1176 MHz

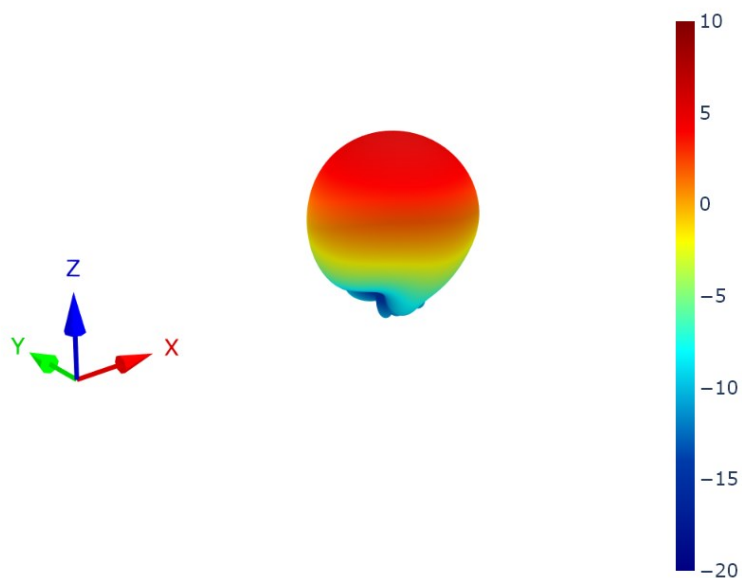


XZ Plane

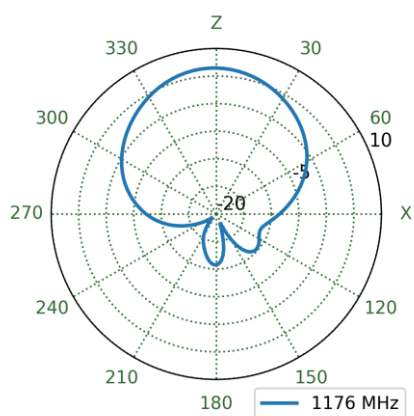


YZ Plane

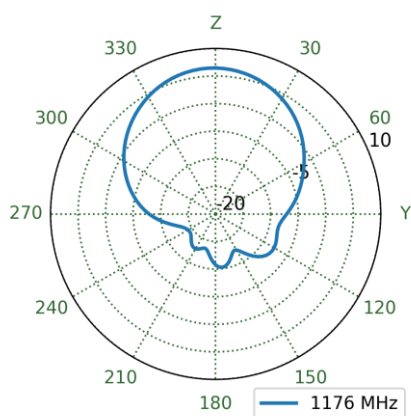


XY Plane

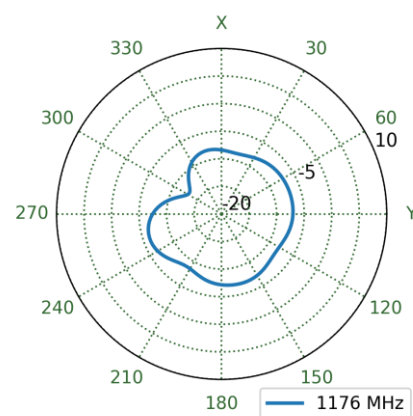


6.3 Patterns at 1228 MHz

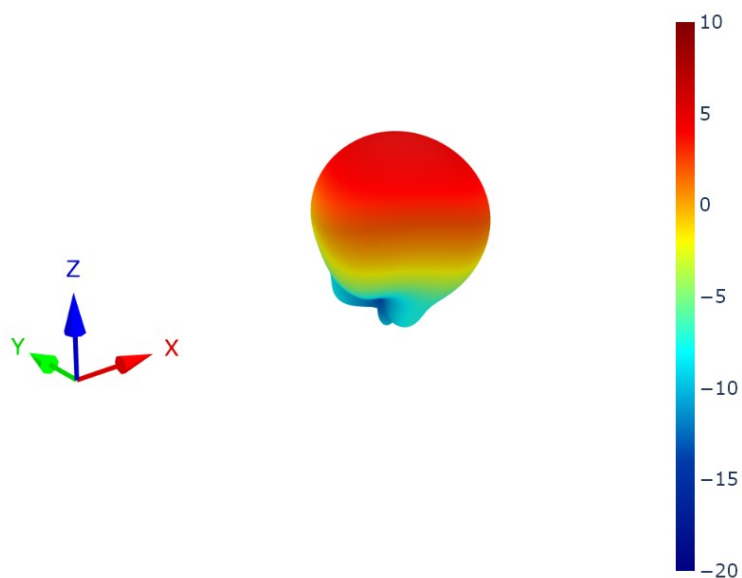


XZ Plane

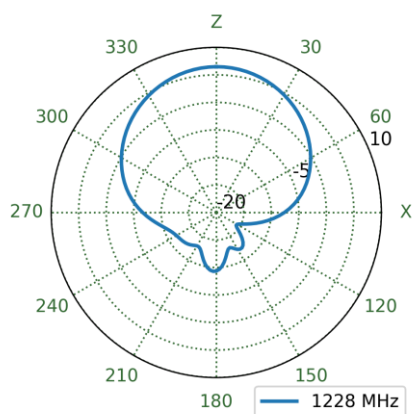


YZ Plane

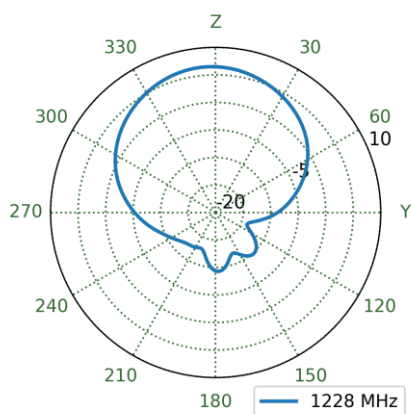


XY Plane

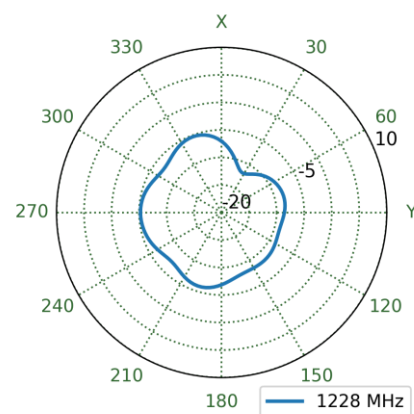


6.4 Patterns at 1278 MHz

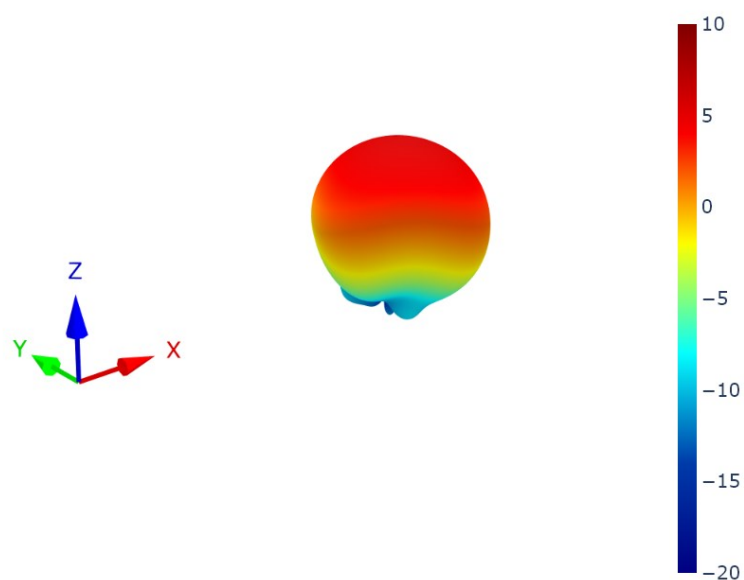


XZ Plane

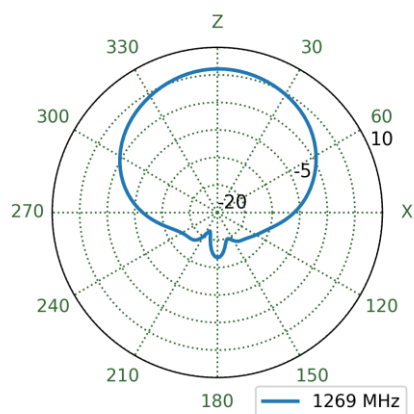


YZ Plane

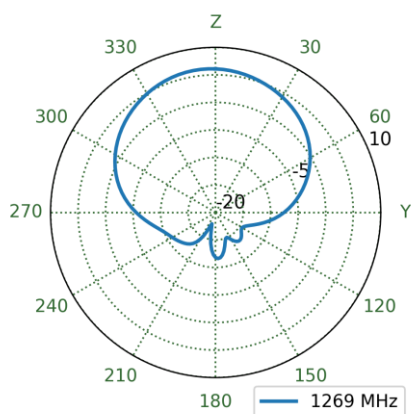


XY Plane

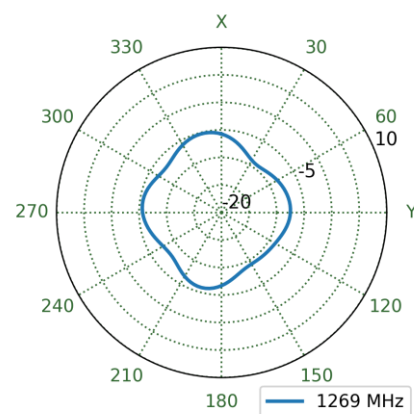


6.5 Patterns at 1542 MHz

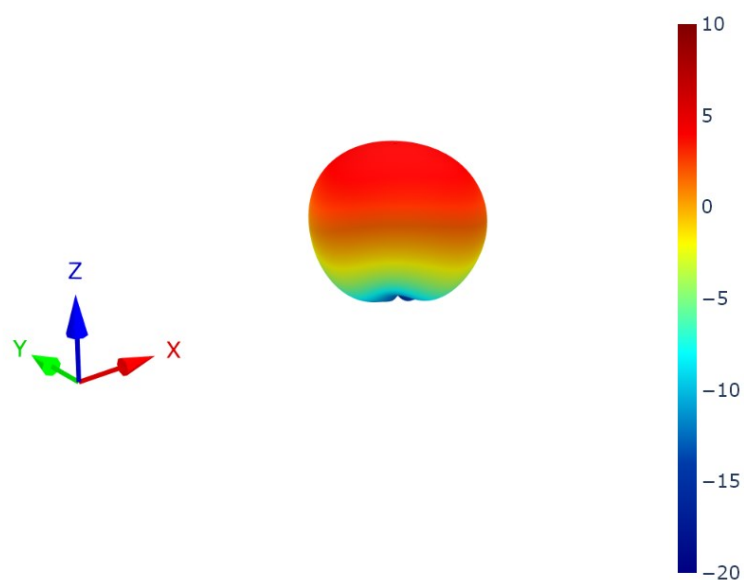


XZ Plane

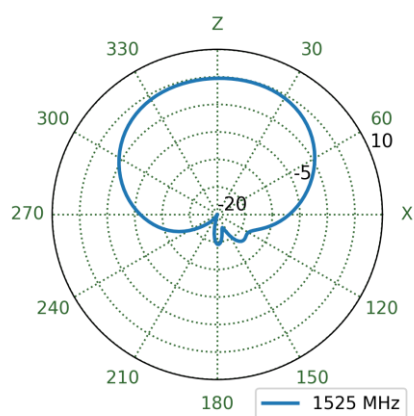


YZ Plane

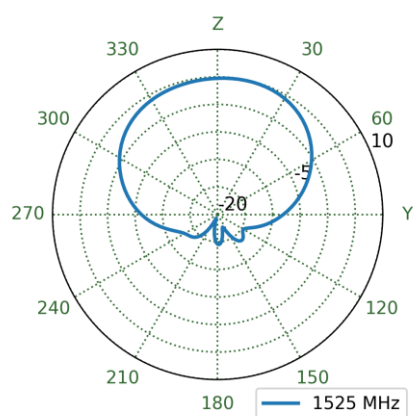


XY Plane

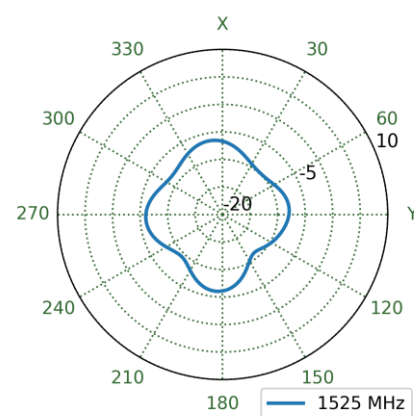


6.6 Patterns at 1561 MHz

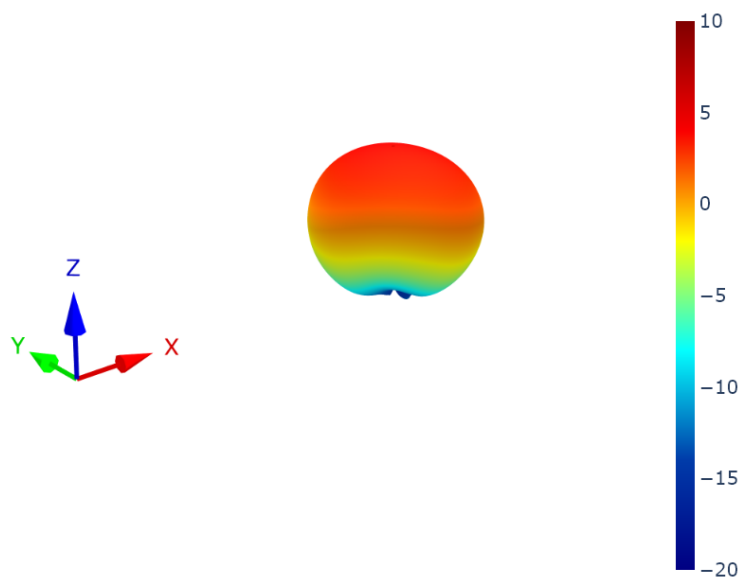


XZ Plane

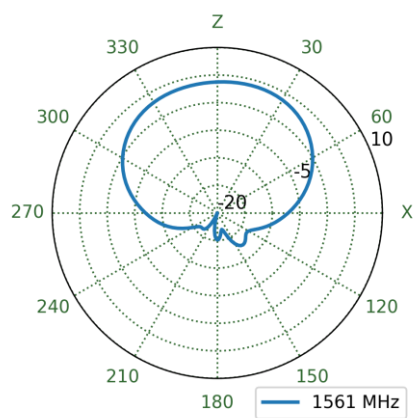


YZ Plane

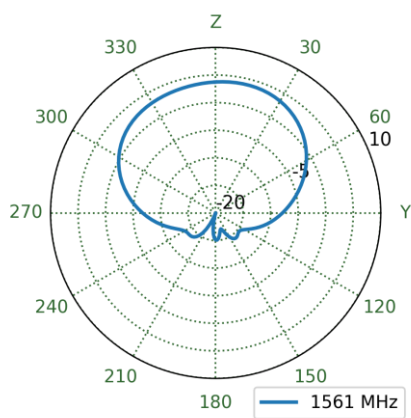


XY Plane

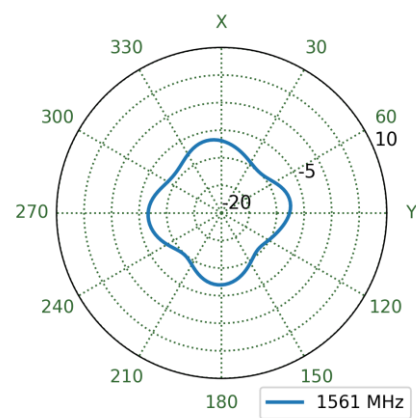


6.7 Patterns at 1576 MHz

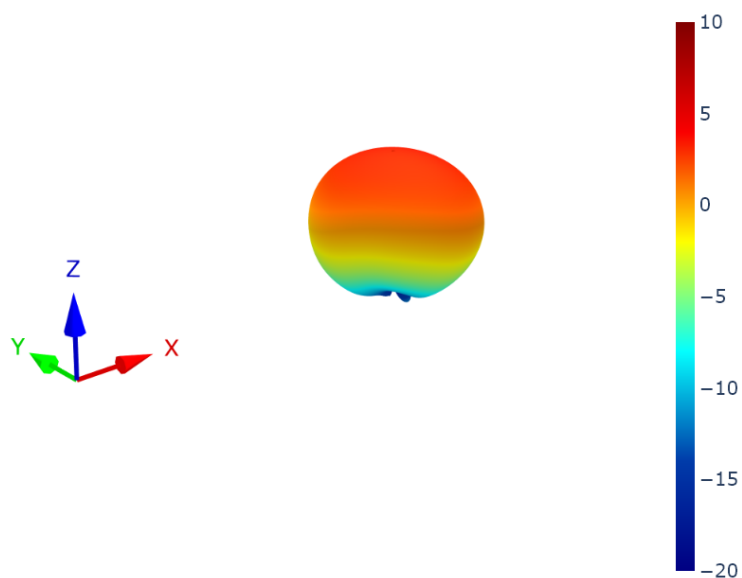


XZ Plane

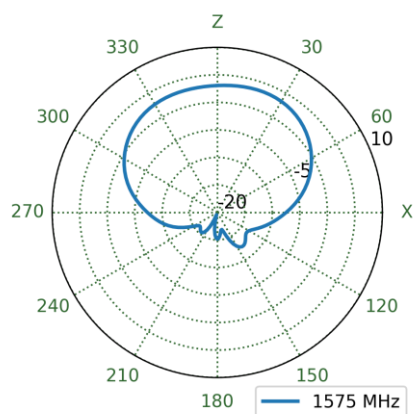


YZ Plane

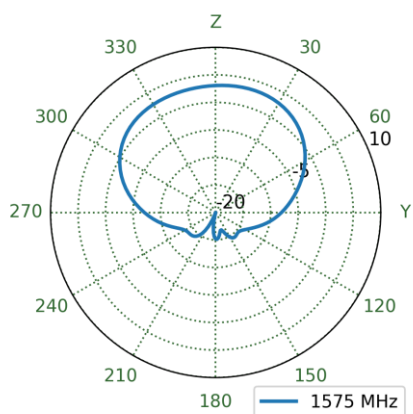


XY Plane

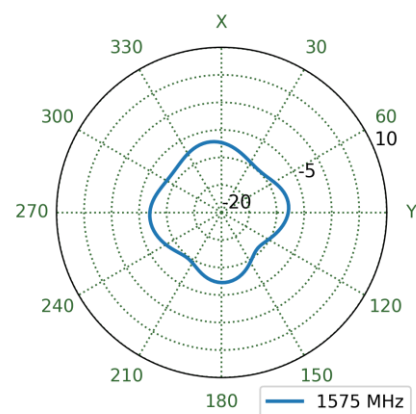


6.8 Patterns at 1602 MHz

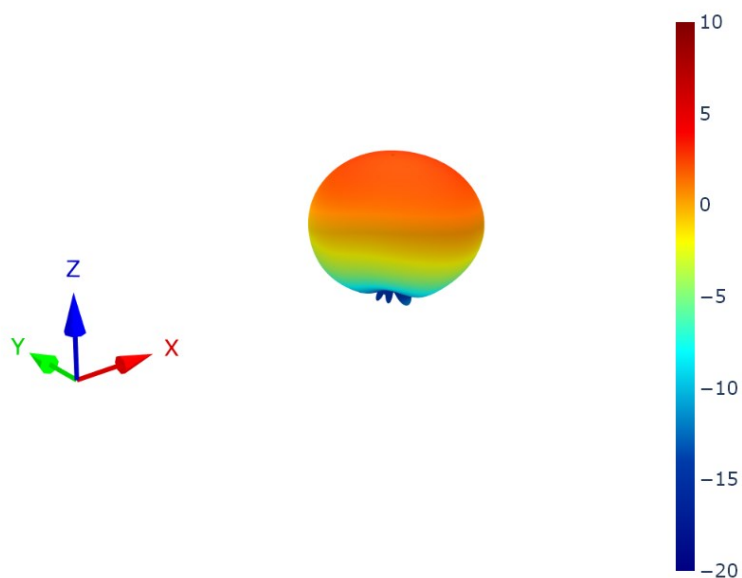


XZ Plane

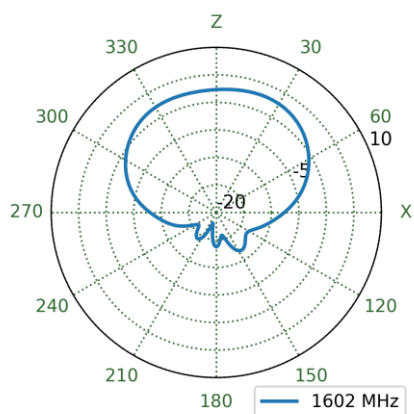

YZ Plane

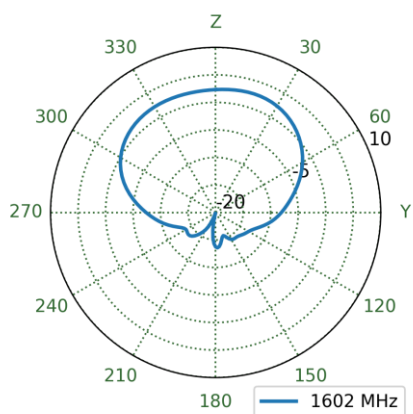


XY Plane

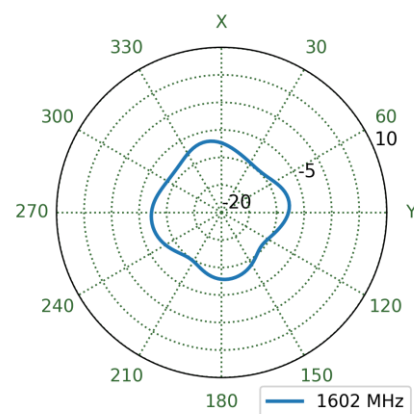


7. LNA Characteristics


7.1 Low-Band - Gain

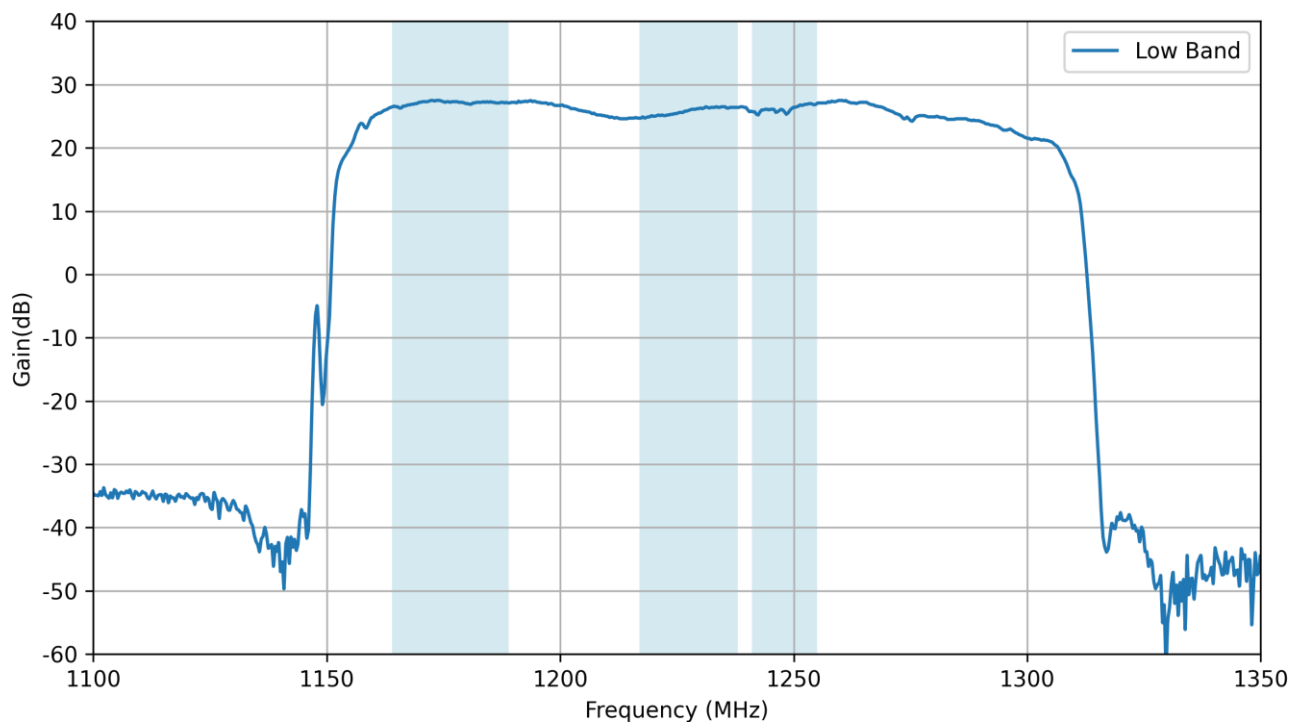


7.2 Low-Band – Noise Figure

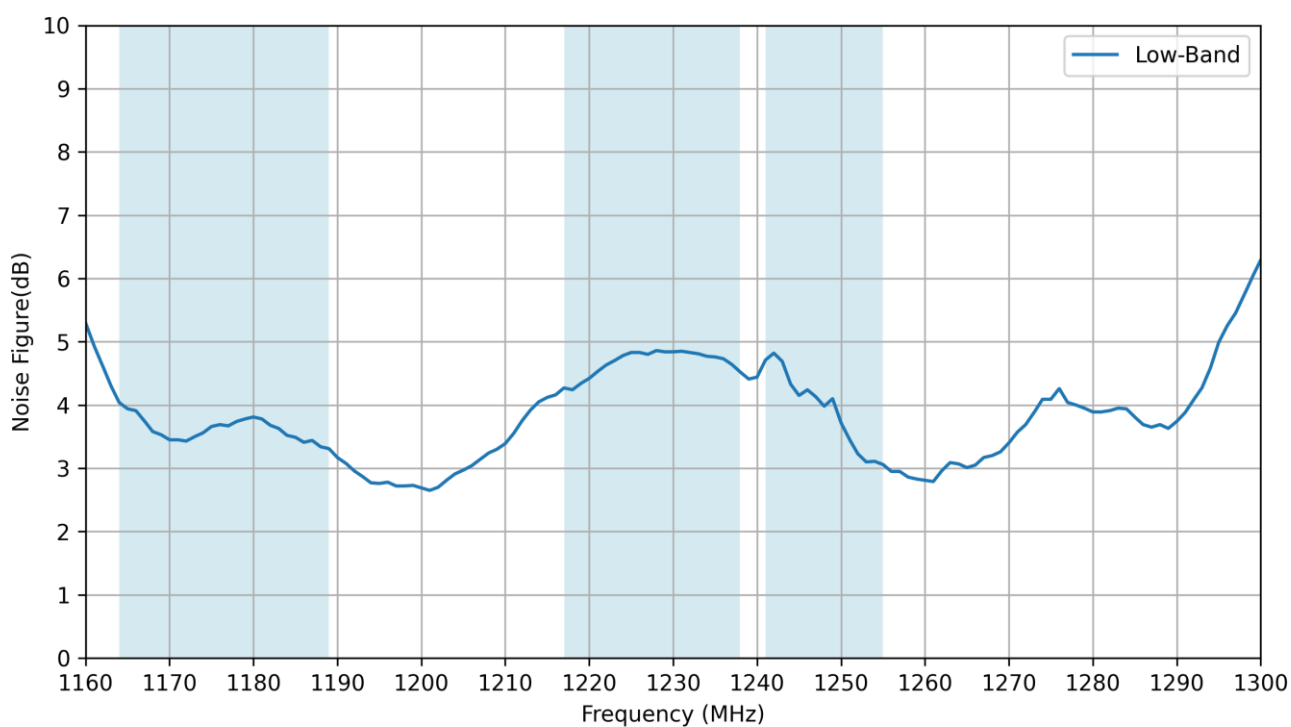


7.3 High-Band Gain

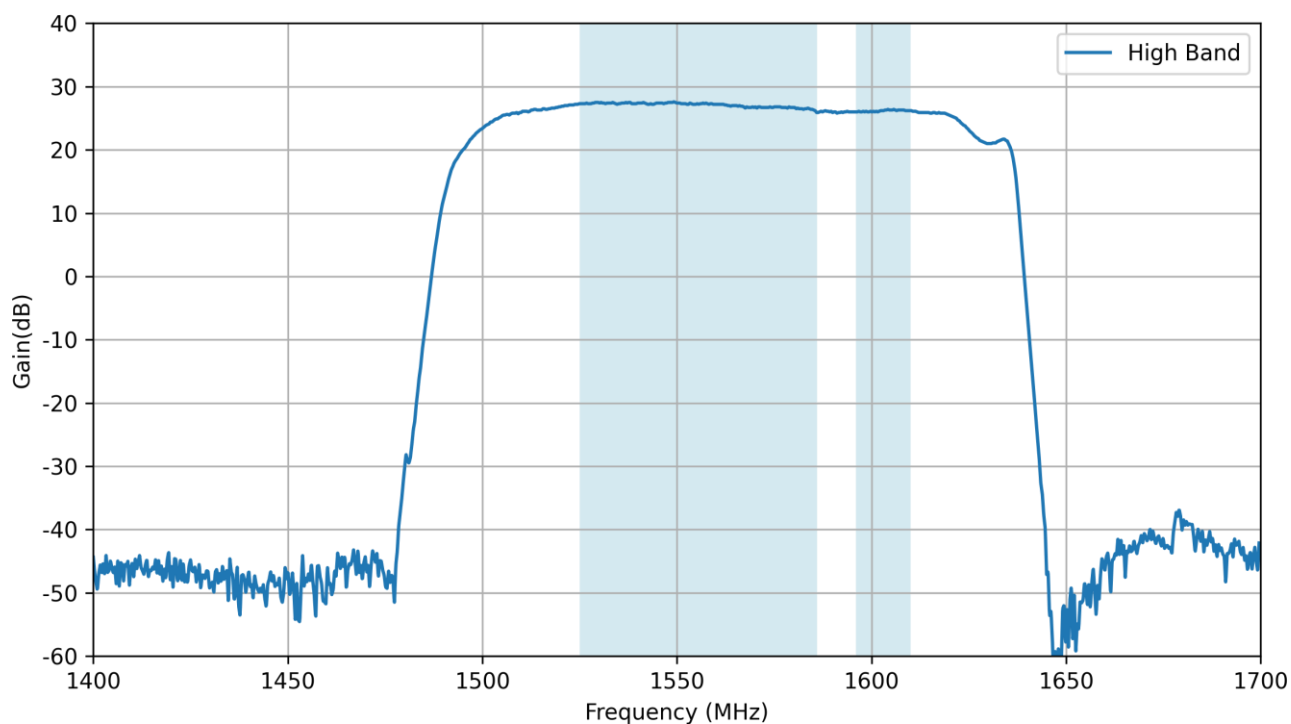

7.4 High-Band Noise Figure

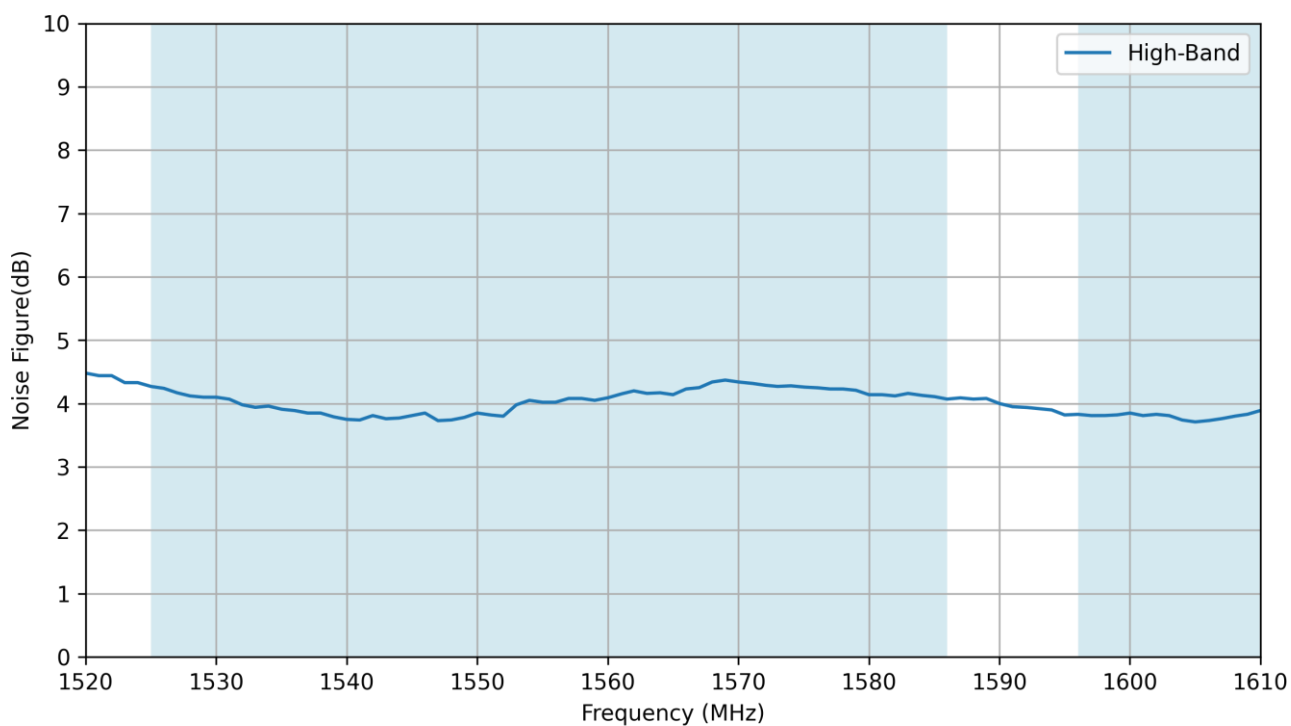

7.5 Out Of Band Rejection

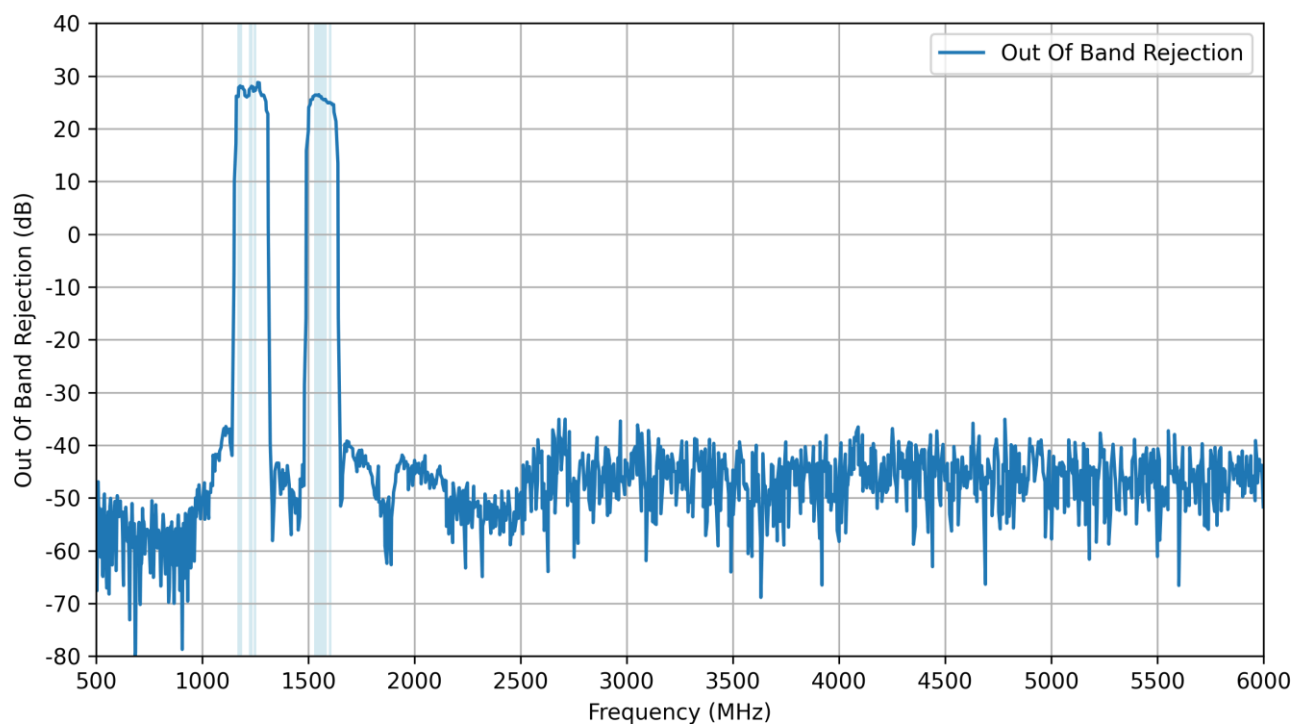

Changelog for the datasheet

SPE-24-8-250 – XAHP.60.A.301111

Revision: A (Initial Release)

Date:	2024-10-03
Notes:	Initial Datasheet Release
Author:	Gary West

Previous Revisions



www.taoglas.com

