


Data Sheet

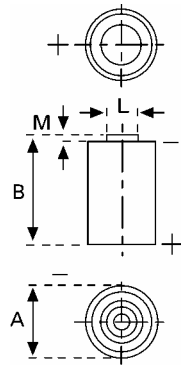

Type Number 6117
Designation IEC ---
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH 13654 (N)
Nominal Voltage 3 V
Typical Capacity C 2000 mAh
 Load 1.0 kOhm, at 20°C down to 2 V

Weight (approx.) 21,5 g
Volume 8,5 ccm
Coding..... Date of Manufacturing Quarter/Year

Temperature Ranges min max.
Storage -55°C 75 °C
Discharge -30°C 75°C

Dimensions min max.
Diameter (A) 14,45 14,75
Height (B) 49,5 50,5
Shoulder Diameter[E]..... 7
Shoulder Height [C]..... 0,6

Segment Electronic

Main Applications Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [μA]:	1000 Ω	Time: Capacity [mAh]: Energy [mWh]:	745 h 2000 5600
Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [μA]:	620 Ω	Time: Capacity [mAh]: Energy [mWh]:	430 h 1850 5000

All Data contained herein is for single cells for battery applications, performance data may vary from single cell data, depending on specific battery configuration