


Attachable heatsink

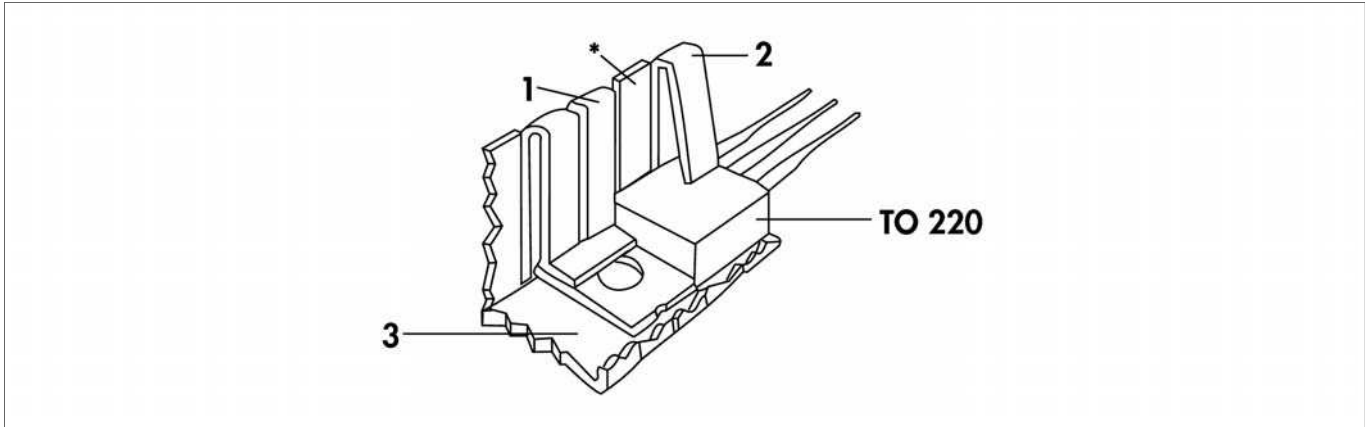

- narrow version with better thermal resistance
- max. 14.5 mm wide
- 3 different lengths for varied dissipation power
- takes less space than any other attachable heatsink
- simple assembly by pushing the heatsink onto the TO 220 housing
- the cooling fingers form spring clamps (1+2), which pushes the TO 220 and it's mounting flange onto the heatsink (3)
- optimum heat transfer due the constant pressure on the entire contact surface of the TO 220 cases
- effective heat emmission with horizontal and vertical mounting

without soldering lug

art. no.					
			26 K/W		
FK 242 SA 220 O					
art. no.					
			21 K/W		
FK 237 SA 220 O					
art. no.					
			16 K/W		
FK 240 SA 220 O					

* = touch in edge of transistor

material: aluminium
surface treatment: black anodised