

TDK-Lambda CUS800M, 1000M and 1200M Series

1.67" High 800W to 1200W AC-DC Power Supplies

<https://product.tdk.com/en/power/cus-m>
www.emea.lambda.tdk.com/cus800-1200m



Medical



Industrial



Test



LED



Broadcast




COMM



The very compact CUS800M, CUS1000M and CUS1200M AC-DC power supplies have a low profile 1.67" (42.5mm) high package and can deliver 800W, 1000W or 1200W with efficiencies up to 95.5%. All models have medical (IEC 60601-1) and audio/video, information and communication technology equipment (IEC 62368-1) certifications. A variable speed fan, 5V 2A standby voltage, remote on/off, remote sense and a Power Good signal is standard.

Features	Benefits
• Medical Certifications (2 x MOPP)	• Generally required for B and BF Type Medical Equipment
• $\leq 0.250\text{mA}$ Leakage Current	• Simpler System Compliance
• Class B Conducted and Radiated EMI	• Easier System EMC Compliance
• Compact 1.67" Height	• Space Saving in End Equipment
• Variable Speed Cooling Fan	• Lower Audible Noise

Model Selector							
Model	Nominal Output Voltage (V)	Output Adjustment (V)	Maximum Current (A)	Peak Current (A)	Maximum Power (W)	Maximum Peak Power (W)	Efficiency 115 / 230Vac (%)
CUS800M-12	12	11.7 - 12.6	56.7	66.7	680.4	800.4	90.8 / 92.5
CUS1000M-12	12	11.7 - 12.6	66.7	83.4	800.4	1000.8	92 / 93.6
CUS800M-24	24	23.4 - 25.9	33.4	-	801.6	-	92 / 94
CUS1000M-24	24	23.4 - 25.9	41.7	-	1000.8	-	93 / 95
CUS1200M-24	24	23.4 - 25.2	50.0	-	1200	-	92.5 / 95
CUS800M-36	36	35.1 - 38.8	22.2	-	799.2	-	92.5 / 94.6
CUS1000M-36	36	35.1 - 38.8	27.8	-	1000.8	-	93.3 / 95.3
CUS1200M-36	36	35.1 - 37.8	33.3	-	1198.8	-	93 / 95.5
CUS800M-48	48	46.8 - 51.8	16.7	-	801.6	-	92.2 / 94
CUS1000M-48	48	46.8 - 51.8	20.9	-	1003.2	-	93.5 / 95.5
CUS1200M-48	48	46.8 - 50.4	25.0	-	1200	-	93 / 95.5

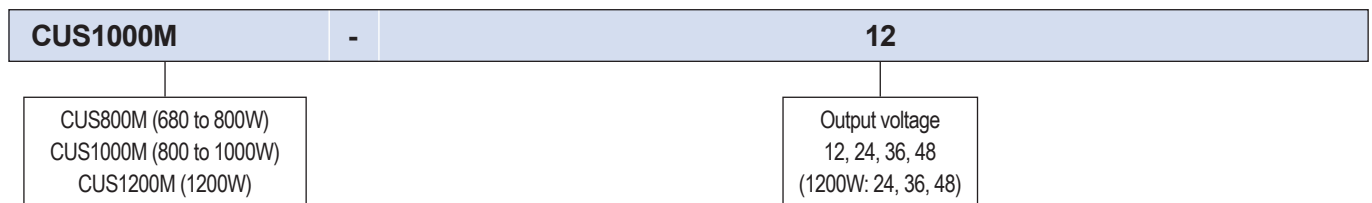

Specifications				
Model		CUS800M	CUS1000M	CUS1200M
Input				
Input Voltage Range (Operating)	Vac	85 - 265 (Derate linearly to 90% load from 90 to 85)		
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac only)		
Input Frequency	Hz	47 - 63		
Input Current at 115 / 230Vac	A	8.0 / 4.0	10.0 / 5.0	12.0 / 6.0
Inrush Current at 115 / 230Vac (Cold Start)	A	25.0 / 50.0	25.0 / 50.0	30.0 / 50.0
Leakage Current	uA	<250 at 265Vac 60Hz		
Touch Current (Enclosure Leakage)	uA	Not applicable		
Power Factor (115 / 230Vac)	-	0.99 / 0.95		
Harmonic Compliance	-	Meets IEC61000-3-2 Class A		
No Load Power Consumption	W	Typically <0.6W at 230Vac (Remote off and no load on 5Vsb). See evaluation data on website		
Hold Up Time (typ) at 115Vac Input	ms	11		
Efficiency	-	See model selector		
Conducted & Radiated EMI	-	EN55032, EN55011-B, FCC-B		
Immunity	-	Compliant with EN60601-1-2:2015 (Ed4), IEC61000-4.2, -3, -4, -5, -6, -8, -11		
Insulation Class	-	Class I		
Safety Certifications and Markings	-	IEC/EN/UL/CSA62368-1, IEC/EN/ES/CSA60601-1. CE Mark and UKCA Mark		

Immunity						
Test	Standard	Test Level	Criteria	Notes (The power stated below is total power (main output + standby output))		
				CUS800M	CUS1000M	CUS1200M
ESD	EN61000-4-2	1,2,3,4	A	-		
Radiated Susceptibility	EN61000-4-3	3	A	-		
Electrical Fast Transient Burst	EN61000-4-4	4	A	-		
Surge	EN61000-4-5	1,2,3,4	A	AC input power port		
Conducted Susceptibility	EN61000-4-6	3	A	-		
Magnetic fields	EN61000-4-8	4	A	-		
Voltage Dips and Input Interruptions	EN61000-4-11 Class 3 Industrial, incl EN55024 (100Vac)	0% for 1/2 cycle	A	A; < 330W, B; > 330W A; < 430W, B; > 330W	A; < 530W, B; > 530W	A; ≤ 500W, B; > 500W
		0% for 1 cycle	A/B		A; < 400W, B; > 400W	A; ≤ 600W, B; > 600W
		40% for 10/12 cycles	A/B			
		70% for 25/30 cycles	A			
		80% for 250/300 cycles	A			
		0% for 250/300 cycles	B			
	EN61000-4-11 Class 3 Industrial, incl EN55024 (240Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W	A; ≤ 600W, B; > 600W
		0% for 1 cycle	A/B			
		40% for 10/12 cycles	A			
		70% for 25/30 cycles	A			
		80% for 250/300 cycles	A			
		0% for 250/300 cycles	B			
EN60601-1-2:2015 (100Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W		
	0% for 1 cycle	A/B				
	70% for 25/30 cycles	A				
EN60601-1-2:2015 (240Vac)	0% for 250/300 cycles	B				
	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W		
	0% for 1 cycle	A/B				
70% for 25/30 cycles	A					
0% for 250/300 cycles	B					
SEMI F47 Line Dip	SEMI F47	-	-	At input voltages > 200Vac		

Specifications		CUS800M	CUS1000M	CUS1200M
Output		Primary-secondary converter: LLC resonant 50k to 300kHz		
Switching Frequency	kHz	12V: 60, 24V: 120, 36V: 180, 48V: 240		
Line Regulation	mV	24V: 120, 36V: 180, 48V: 240		
Load Regulation	mV	12V: 120, 24V: 240, 36V: 360, 48V: 480		
External Load Capacitance	uF	12 - 36V: 10,000, 48V: 7,000		
Ripple & Noise	mV	12V: 240, 24V: 360, 36V: 480, 48V: 480		
Temperature Coefficient	%/°C	±0.02		
Minimum Load	-	No minimum load required		
Overcurrent Protection ⁽¹⁾	A	CUS800M: 12V: >70.1, 24V: >35.1, 36V: >23.4, 48V >17.6 CUS1000M: 12V: >87.6, 24V: >43.8, 36V: >29.2, 48V >22 CUS1200M: 24V:>52.5, 36V: >35.0, 48V:>26.3		
Overvoltage Protection	-	CUS800M, CUS1000M: 12V: 13.8 - 16.2, 24V: 27.6 - 32.4, 36V: >41.4 - 48.6, 48V >55.2 - 64.8 CUS1200M: 24V: 27.6 - 32.4, 36V: >41.4 - 48.6, 48V >55.2 - 64.8		
Overtemperature Protection	-	Latching (unit shutdown), cycle AC input to reset		
Remote Sense	-	0.5V total compensation		
Remote On/Off	-	Opto-isolated. Inhibit: Low = ON, High = OFF		
Power Good	-	Combined AC Fail and DC OK opto isolated signal		
Standby Voltage	-	5V 2A		
Parallel Operation	-	Not possible		
Environmental				
Operating Temperature (-25°C start-up)	°C	-20 to +70, derate linearly to 60% load from 40 to 70 (CUS1200M-24:35 to 70)		
Storage Temperature	°C	-40 to +75		
Humidity (non condensing)	%RH	10 - 95. Operating and storage		
Cooling	-	Variable speed fan, air exits across output terminals. Typical 30dBA at 20% load, 42dBA at full load		
Altitude	m	5,000. Operating, transportation and storage		
Withstand Voltage (For 1 minute)	Vac	Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPP), Output to Ground 1,500 (1xMOPP)		
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500Vdc		
Vibration (Non Operating)	-	10-55Hz (1 min sweep). Maximum 19.6m/s ² , 1 hour each		
Shock	-	<196m/s ²		
Other				
Weight (Typ)	g	810	850	980
Size (LxWxH)	mm	171 x 85 x 42.5	171 x 85 x 42.5	187 x 93 x 42.5
Size (LxWxH)	Inches	6.73 x 3.35 x 1.67	6.73 x 3.35 x 1.67	7.36 x 3.66 x 1.67
Connectors	-	Screw terminals. Signals: JST B8B PHDSS, Mating connector: PHDR-08VS		
MTBF - Telcordia SR-332 ⁽²⁾	Hours	452,227		
Warranty	yrs	5		

Notes:

See website for detailed specifications, test methods and installation manual

Specification parameters apply at 25°C ambient temperature unless otherwise stated.

(1) Hiccup with automatic recovery. If the output is shorted, an AC power reset may be required

(2) 24V full load, 115Vac input, 40°C



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
 ttf.fr-powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tia.powersolutions@tdk.com
 www.us.lambda.tdk.com



Italy Sales Office

Tel: +39 02 61 29 38 63
 ttf.it-powersolutions@tdk.com
 www.emea.lambda.tdk.com/it



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en



Netherlands

tff.nl-powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl



TDK-Lambda Corporation

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn



Austria Sales Office

Tel: +43 2256 655 84
 tlg.at-powersolutions@tdk.com
 www.emea.lambda.tdk.com/at



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
 tis.marketing@tdk.com
 www.sg.lambda.tdk.com



Switzerland Sales Office

Tel: +41 44 850 53 53
 tlg.ch-powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch




TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: Tel. +45 3222 8086
 tlg.dk-powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk

