


T H E R M O M E T R I C S
A C O M M I T M E N T T O E X C E L L E N C E

TG Series NTC Thermistors

Glass-Sealed Radial Type Thermistors

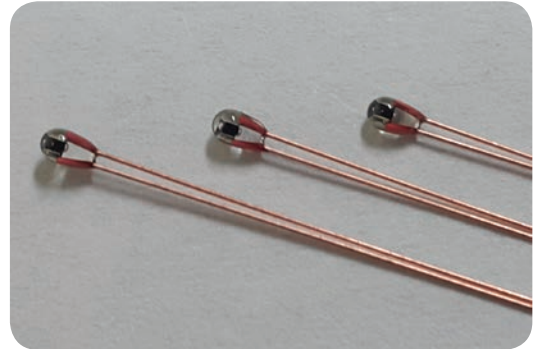

Another innovative solution from Amphenol Advanced Sensors - The TG Series of Glass-Sealed NTC Type Thermistors featuring high resistance and accuracy.

Features

- High temperature resistance up to +300°C (572°F)
- Chip type element
- Fast response time
- Water and oilproof design
- Tin and Nickel-Plated options available

Applications

- Automotive
(Water, Oil and Air Temperature Sensing)
- Heating / Cooling Devices
- Boiler Systems
- Appliances


Amphenol
Advanced Sensors

Type TG Series Specifications

Dimensions

(unit: mm)

D	H	d (dumet)	L
Φ 1.3	2.2	Φ 0.2	65

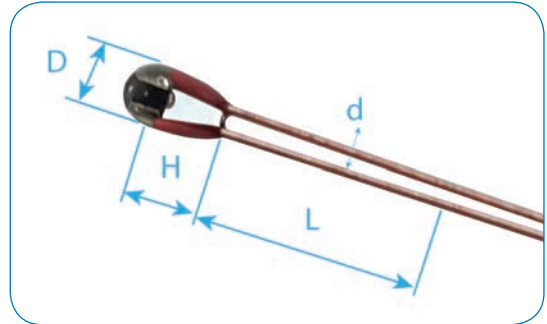

Standard Specifications

- Thermal time constant : 5 Sec. approx. (in still air)
- Dissipation constant : 0.75 mW/C approx. (in still air)
- Operating temperature : -40°C +300°C

Part No.	R25 Ω	B (25/50)	Operating Temp. (Max)
TG250*34*B*	5k	3434 K	+300°C (+572°F)
TG310*34*B*	10k	3434 K	+300°C (+572°F)

Part No. ⁽¹⁾

TG	310	*	34	*	B	*	
							Wire : NR (dumet)
							Center temperature : B (25°C)
							Tolerance of B constant : G (±2%)
							B constant : 34 (3400K ~ 3499K)
							Tolerance of resistance : J (±5%)
							Resistance at 25°C : 310 = 10 x 10 ³ = 10kΩ, 250 = 50 x 10 ² = 5kΩ
							Glass-sealed radial type thermistor

1. Other values are available upon request.

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2017 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.
Other company names and product names used in this document are the registered trademarks or
trademarks of their respective owners.

AAS-920-669B - 09/2017