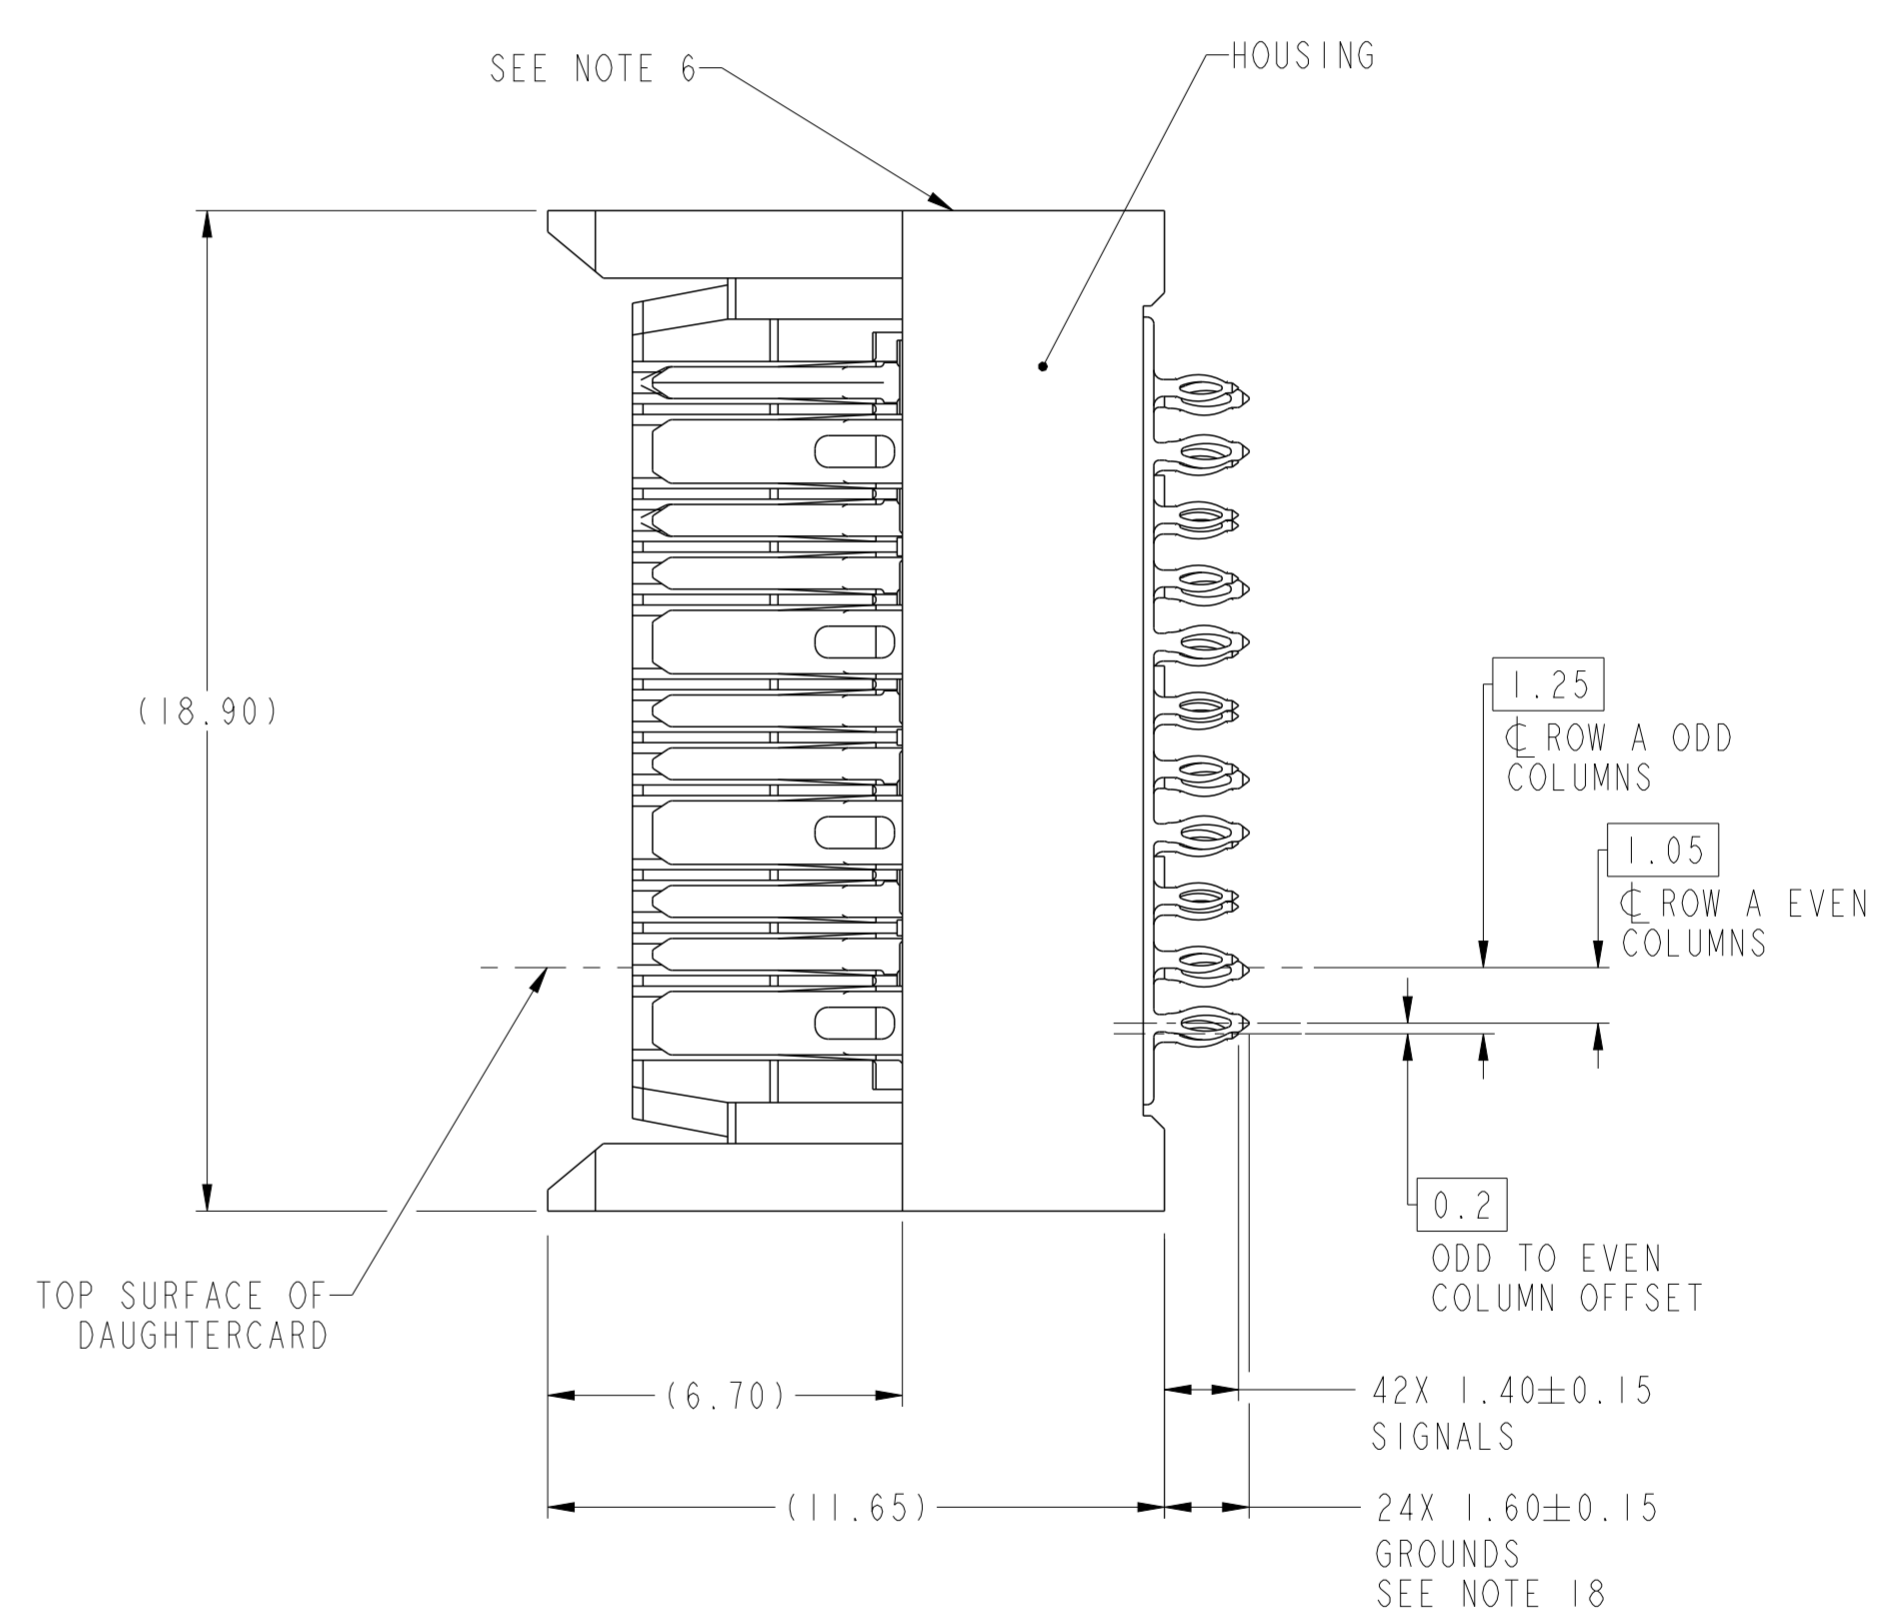
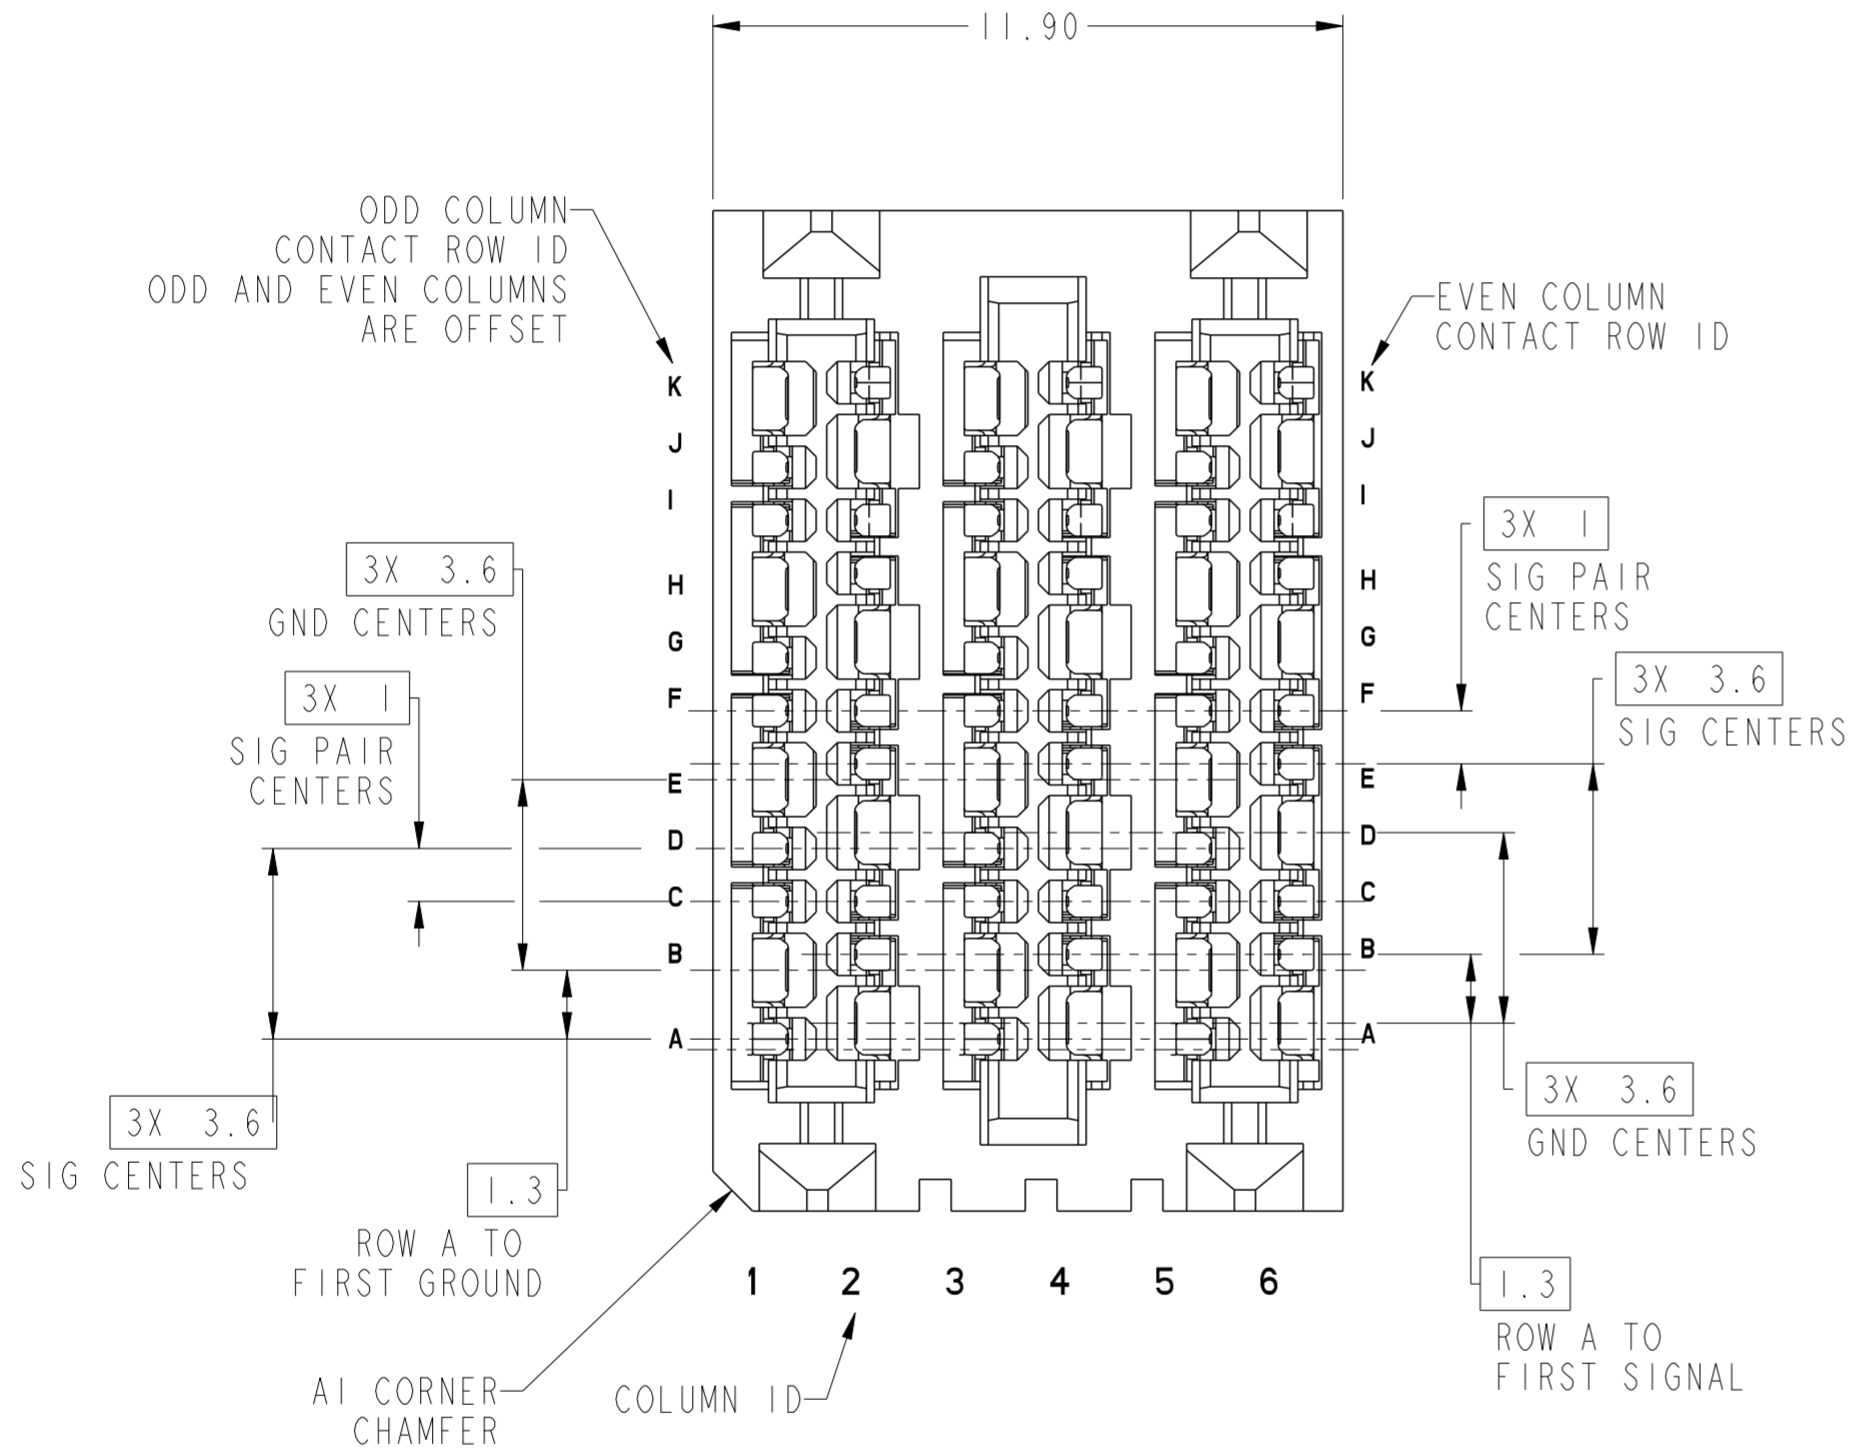


PRODUCT NUMBER
SEE SHEET 10




10128349-Y01LF
(10128349-101LF STANDRAD MATE CONNECTOR SHOWN)
SCALE 7:1


spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	7:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	appr						
surface	linear	0.X	±.3	Amphenol FCI		ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA		dwg no 10128349	rev 7	
		0.XX	±.10							
		0.XXX	±.050							
	angular	0°	±2°	cat. no.	Product - Customer Drw		sheet 1 of 11			

Amphenol FCI

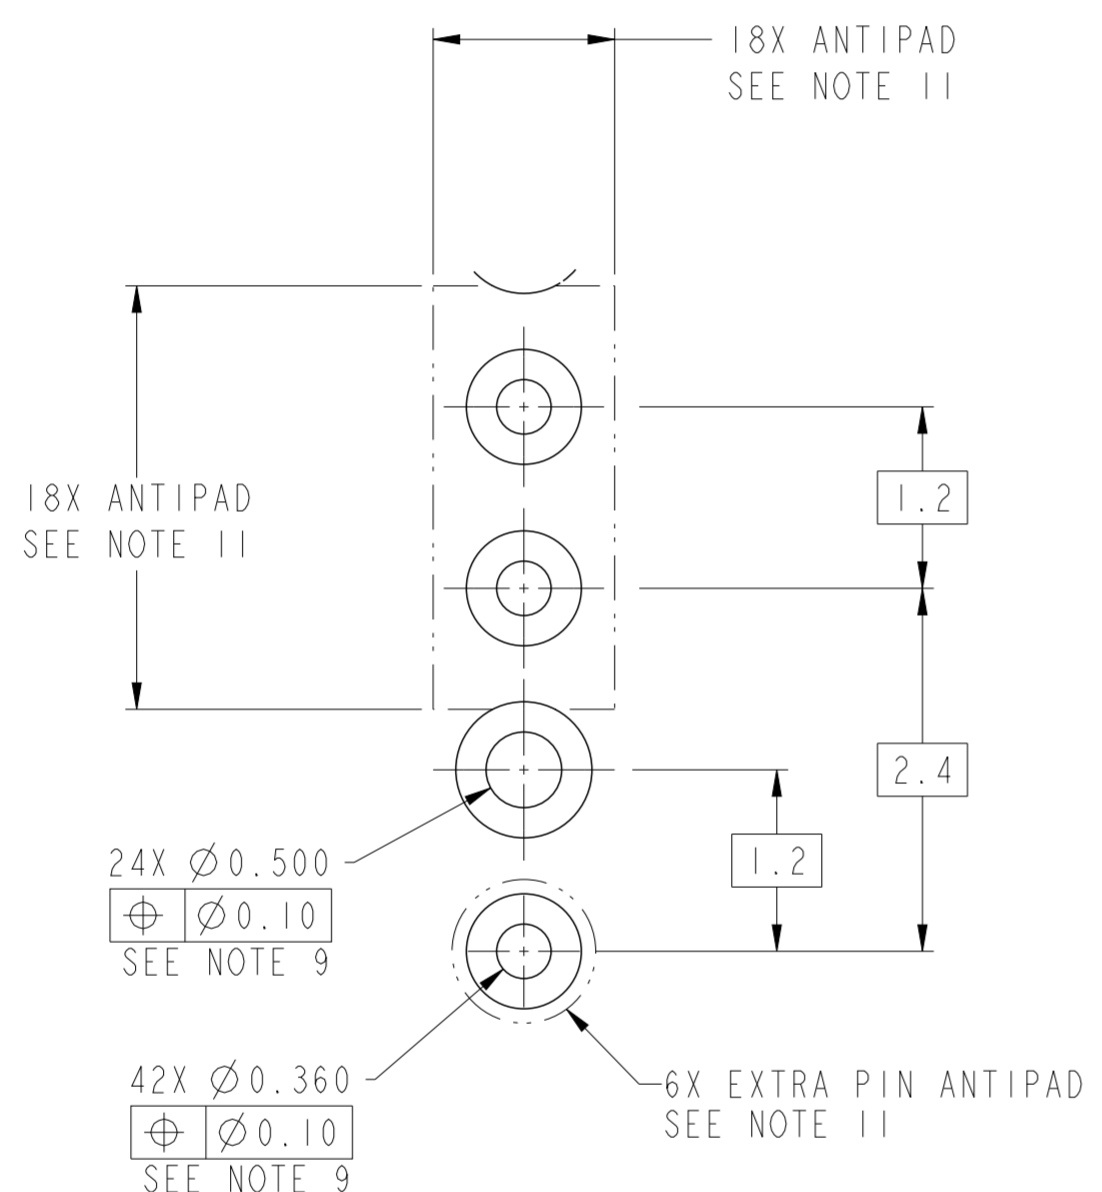© 2016 APCI




DETAIL A
SCALE 20:1

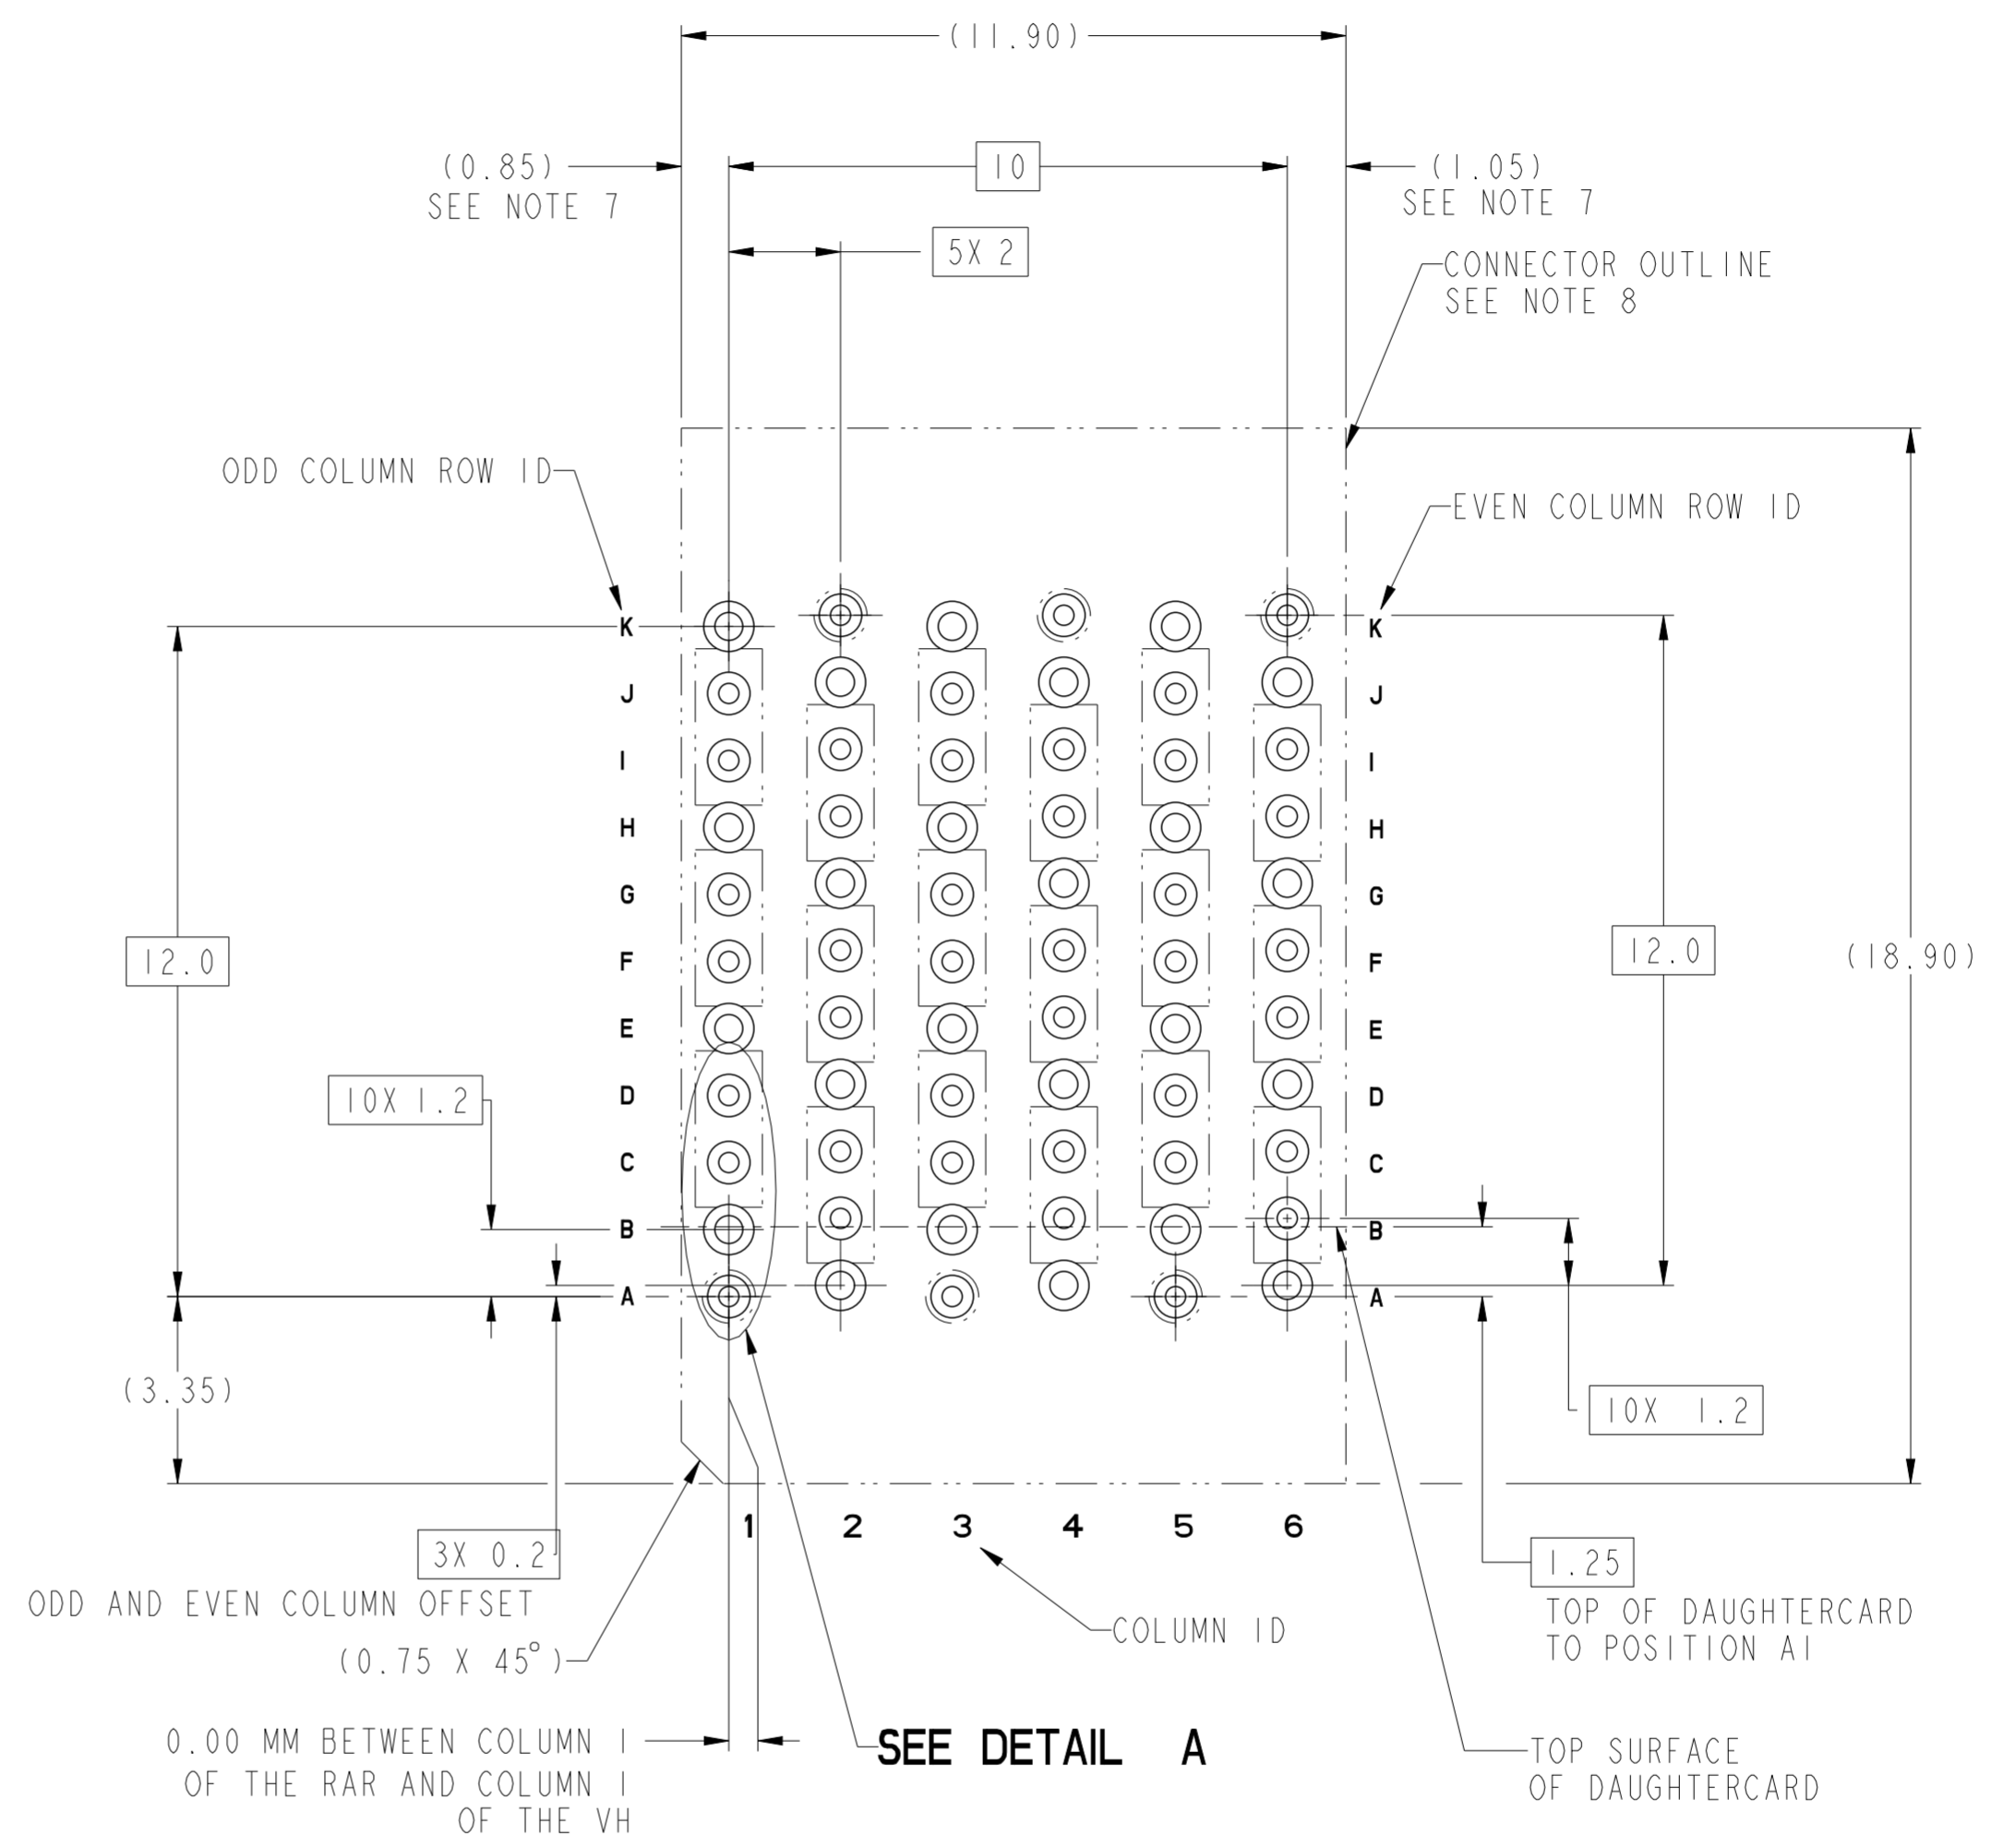

**RECOMMENDED PCB LAYOUT FOR
10128349-Y01LF COMPONENT SIDE
SEE NOTES 7, 8, 9 & 11
SCALE 8:1**

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	5:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary	
ASME Y14.5M		chr	-	appr							-
surface	linear	0.X	±.3		Amphenol FCI		title	ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA		rev	7
		0.XX	±.10		cat. no.	Product - Customer Drw	dwg no	10128349	sheet 2 of 11		
	angular	0°	±2°								

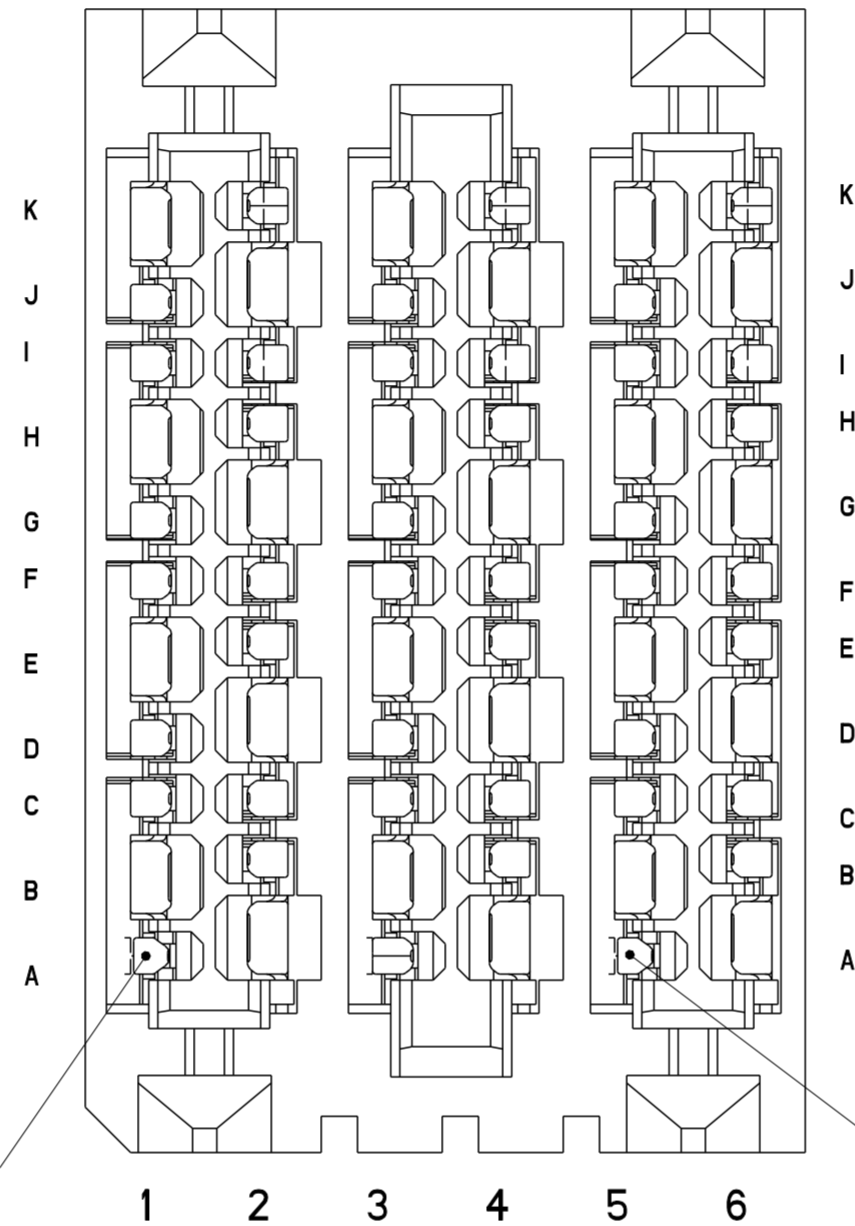

ADVANCED MATE
POSITION A1
SEE NOTE 13

ADVANCED MATE
POSITION A5
SEE NOTE 13

10128349-201LF
ADVANCED MATE CONNECTOR
 ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
 FOR ALL DIMENSIONS SEE SHEET 1
 SCALE 8:1

Amphenol
FCi

© 2016 AFci

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	5:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	-			product family	ExaMAX		
surface		linear	0.X	±.3		title ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA	dwg no 10128349	rev 7	cat. no. Product - Customer Drw	sheet 3 of 11
<input checked="" type="checkbox"/>	0.XX	±.10								
	0.XXX	±.050								
	angular	0°	±2°							

A

B

C

D

E

F

A

B

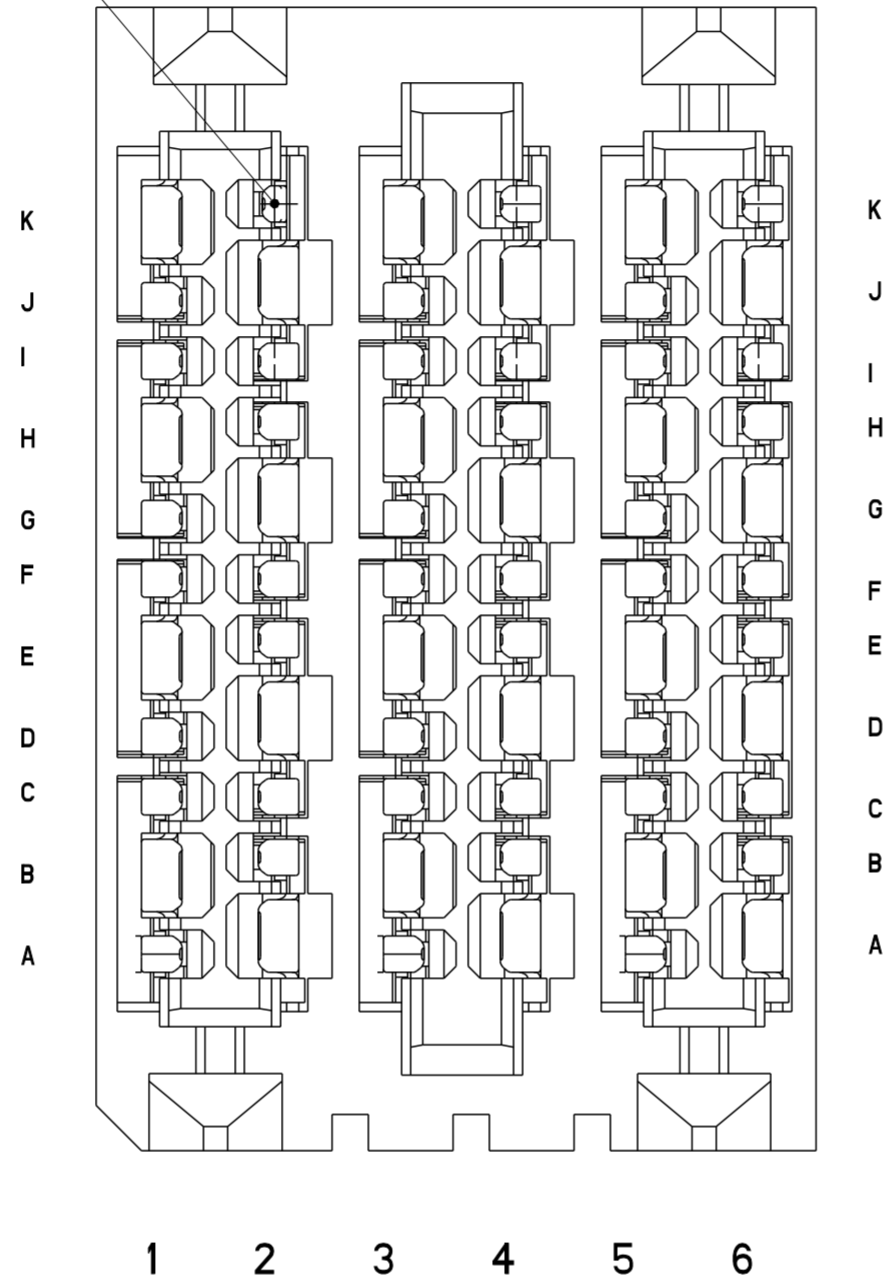
C

D

E

F

SHORT DETECT
POSITION K2
SEE NOTE 14




10128349-301LF
SHORT DETECT CONNECTOR
SHORT DETECT POSITIONS IS K2 ONLY
FOR ALL DIMENSIONS SEE SHEET 1
SCALE 8:1

Amphenol
FCi

© 2016 APCI

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	5:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	-						
surface	-	linear	0.X	±.3		title ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA	dwg no 10128349	rev 7	cat. no. Product - Customer Drw	sheet 4 of 11
			0.XX	±.10						
			0.XXX	±.050						
		angular	0°	±2°						

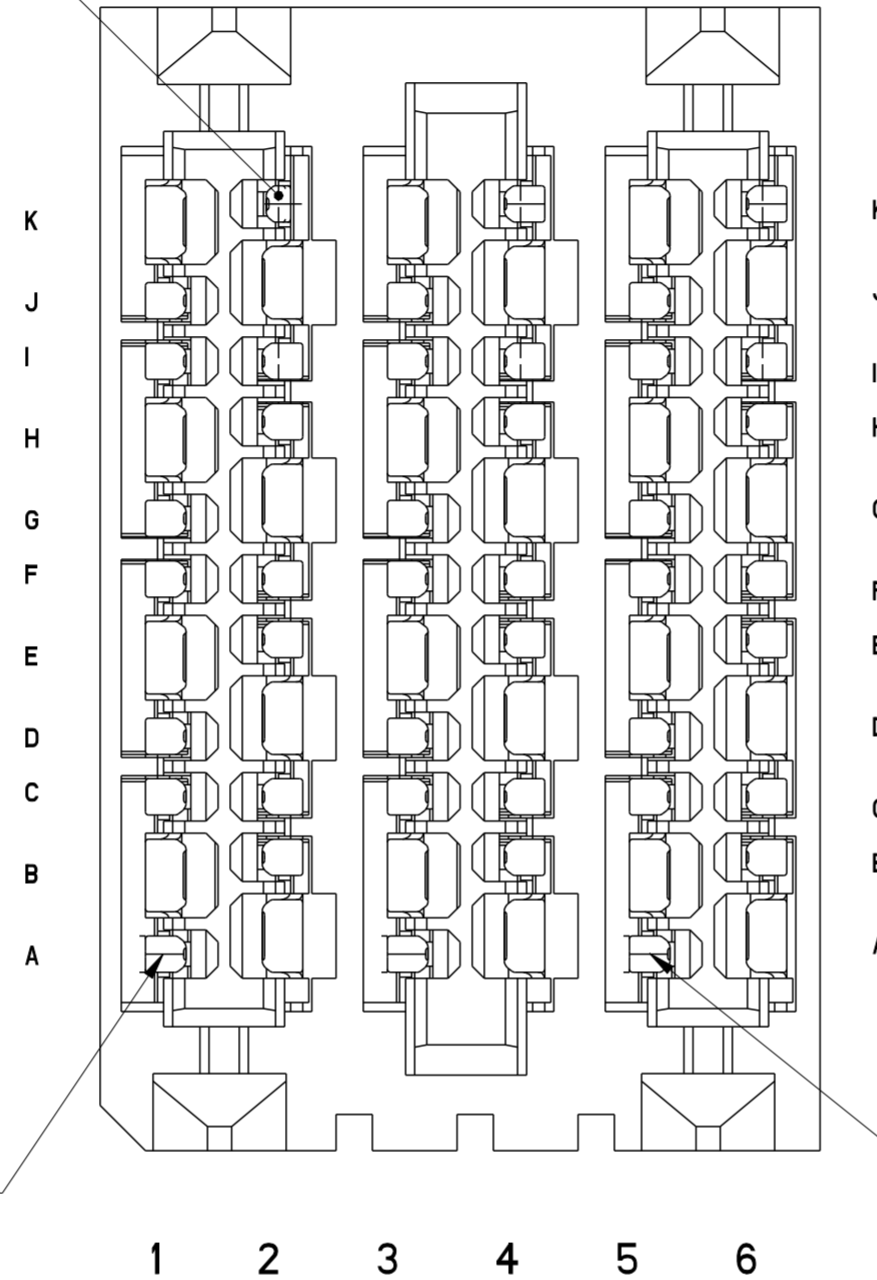SHORT DETECT
POSITION K2
SEE NOTE 15



ADVANCED MATE
POSITION A1
SEE NOTE 15



ADVANCED MATE
POSITION A5
SEE NOTE 15

10128349-401LF
ADVANCED MATE/SHORT DETECT CONNECTOR
ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
SHORT DETECT POSITIONS IS K2 ONLY
FOR ALL DIMENSIONS SEE SHEET 1
SCALE 8:1

Amphenol
FCi

© 2016 AFci

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	3:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	product family			ExaMAX			
surface		linear	0.X	±.3		title ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA	dwg no 10128349	rev 7	cat. no. Product - Customer Drw	sheet 5 of 11
<input checked="" type="checkbox"/>	0.XX	±.10								
	0.XXX	±.050								
	angular	0°	±2°							

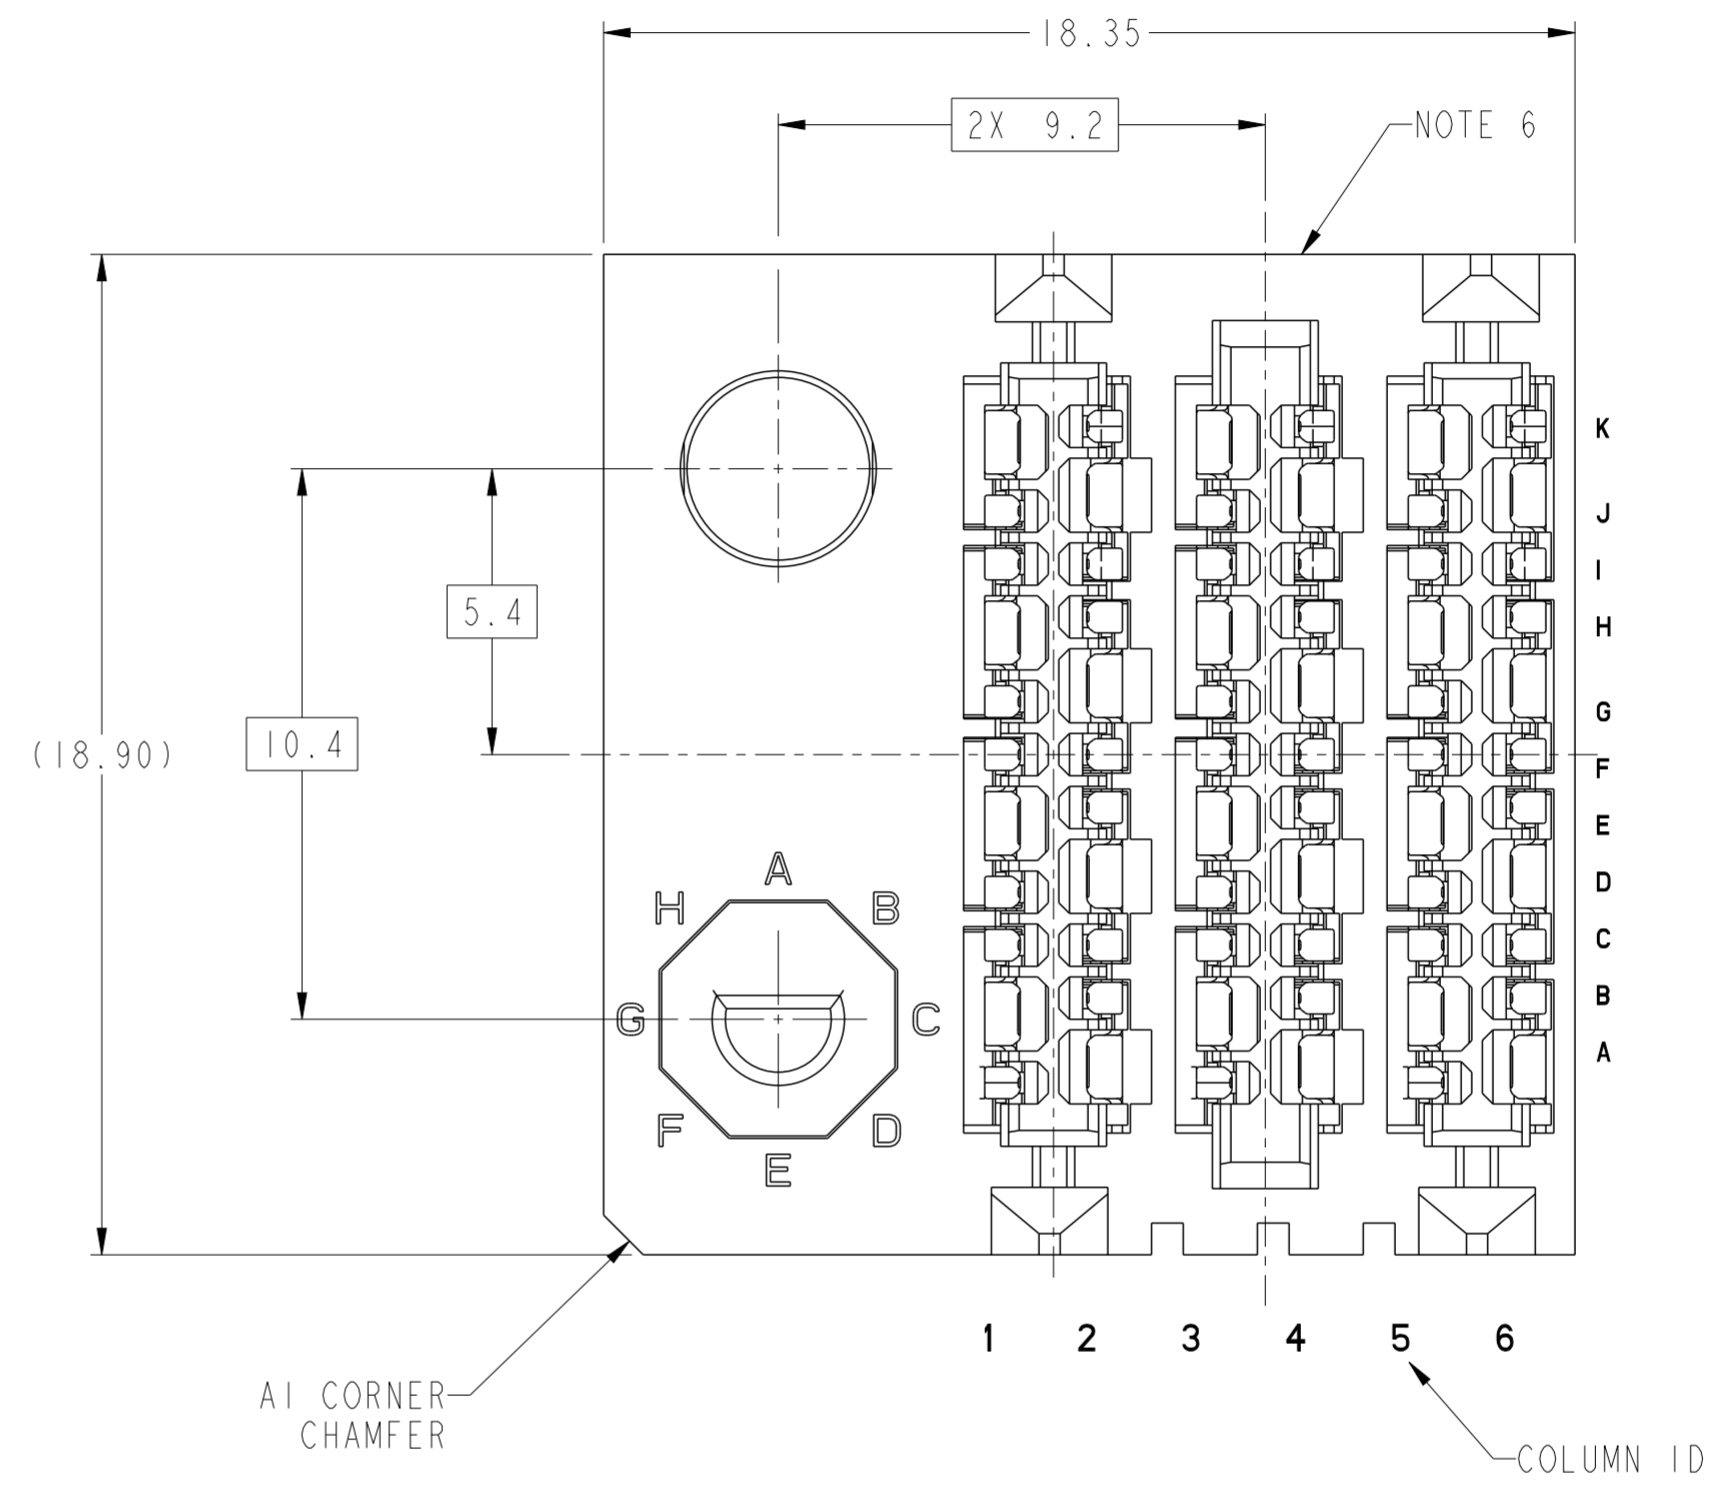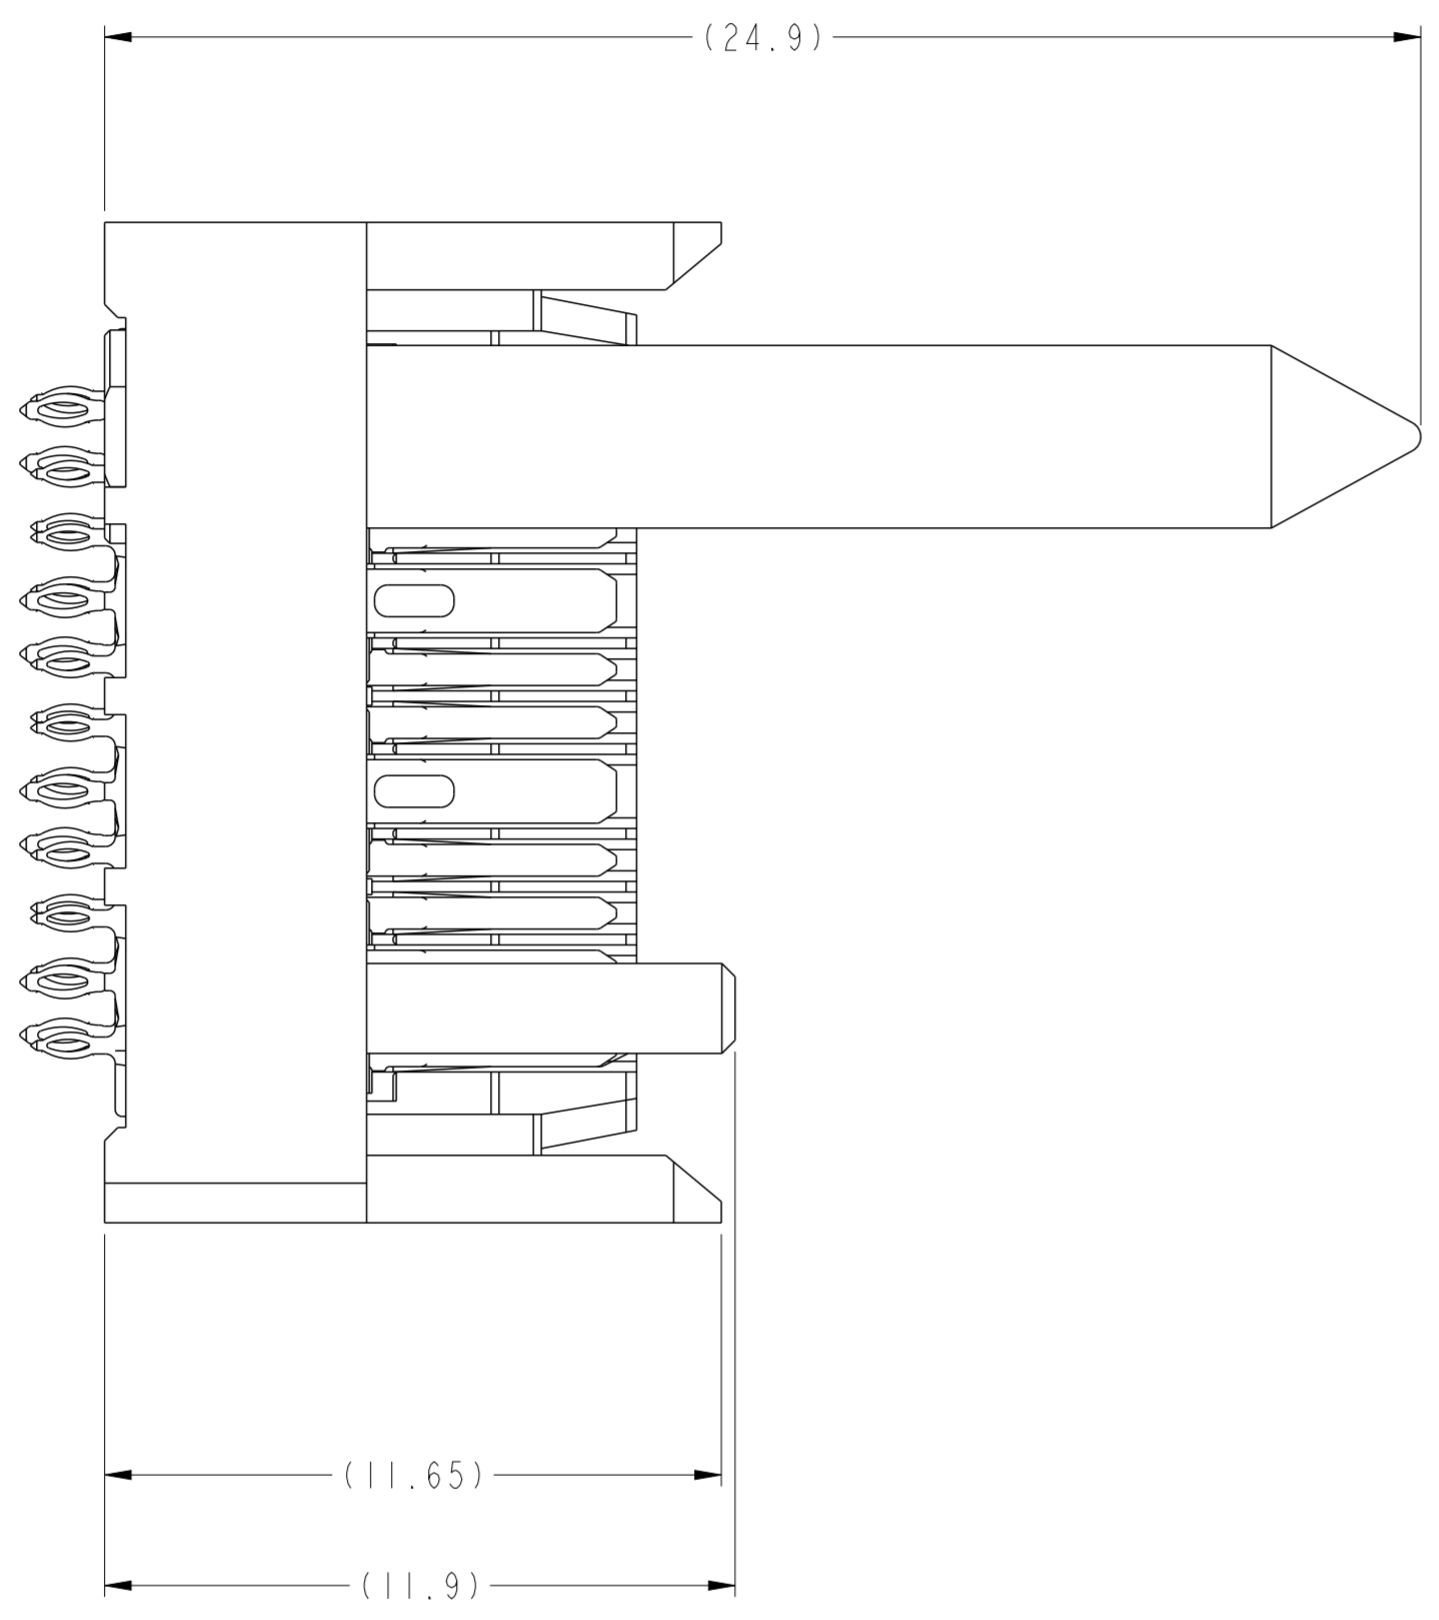

10128349-Y1ALF THRU -Y1JLF
 RIGHT GUIDANCE CONNECTOR (SEE NOTE 17)
 FOR ALL OTHER DIMENSIONS SEE SHEET 1
 SCALE 7:1

Amphenol
 FCI

© 2016 AFCI

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	5:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	product family			ExaMAX			
surface	- ✓	linear	0.X	±.3	Amphenol FCI	title ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA	dwg no 10128349	rev 7	cat. no. Product - Customer Drw	sheet 6 of 11
			0.XX	±.10						
			0.XXX	±.050						
		angular	0°	±2°						

A

B

C

D

E

F

A

B

C

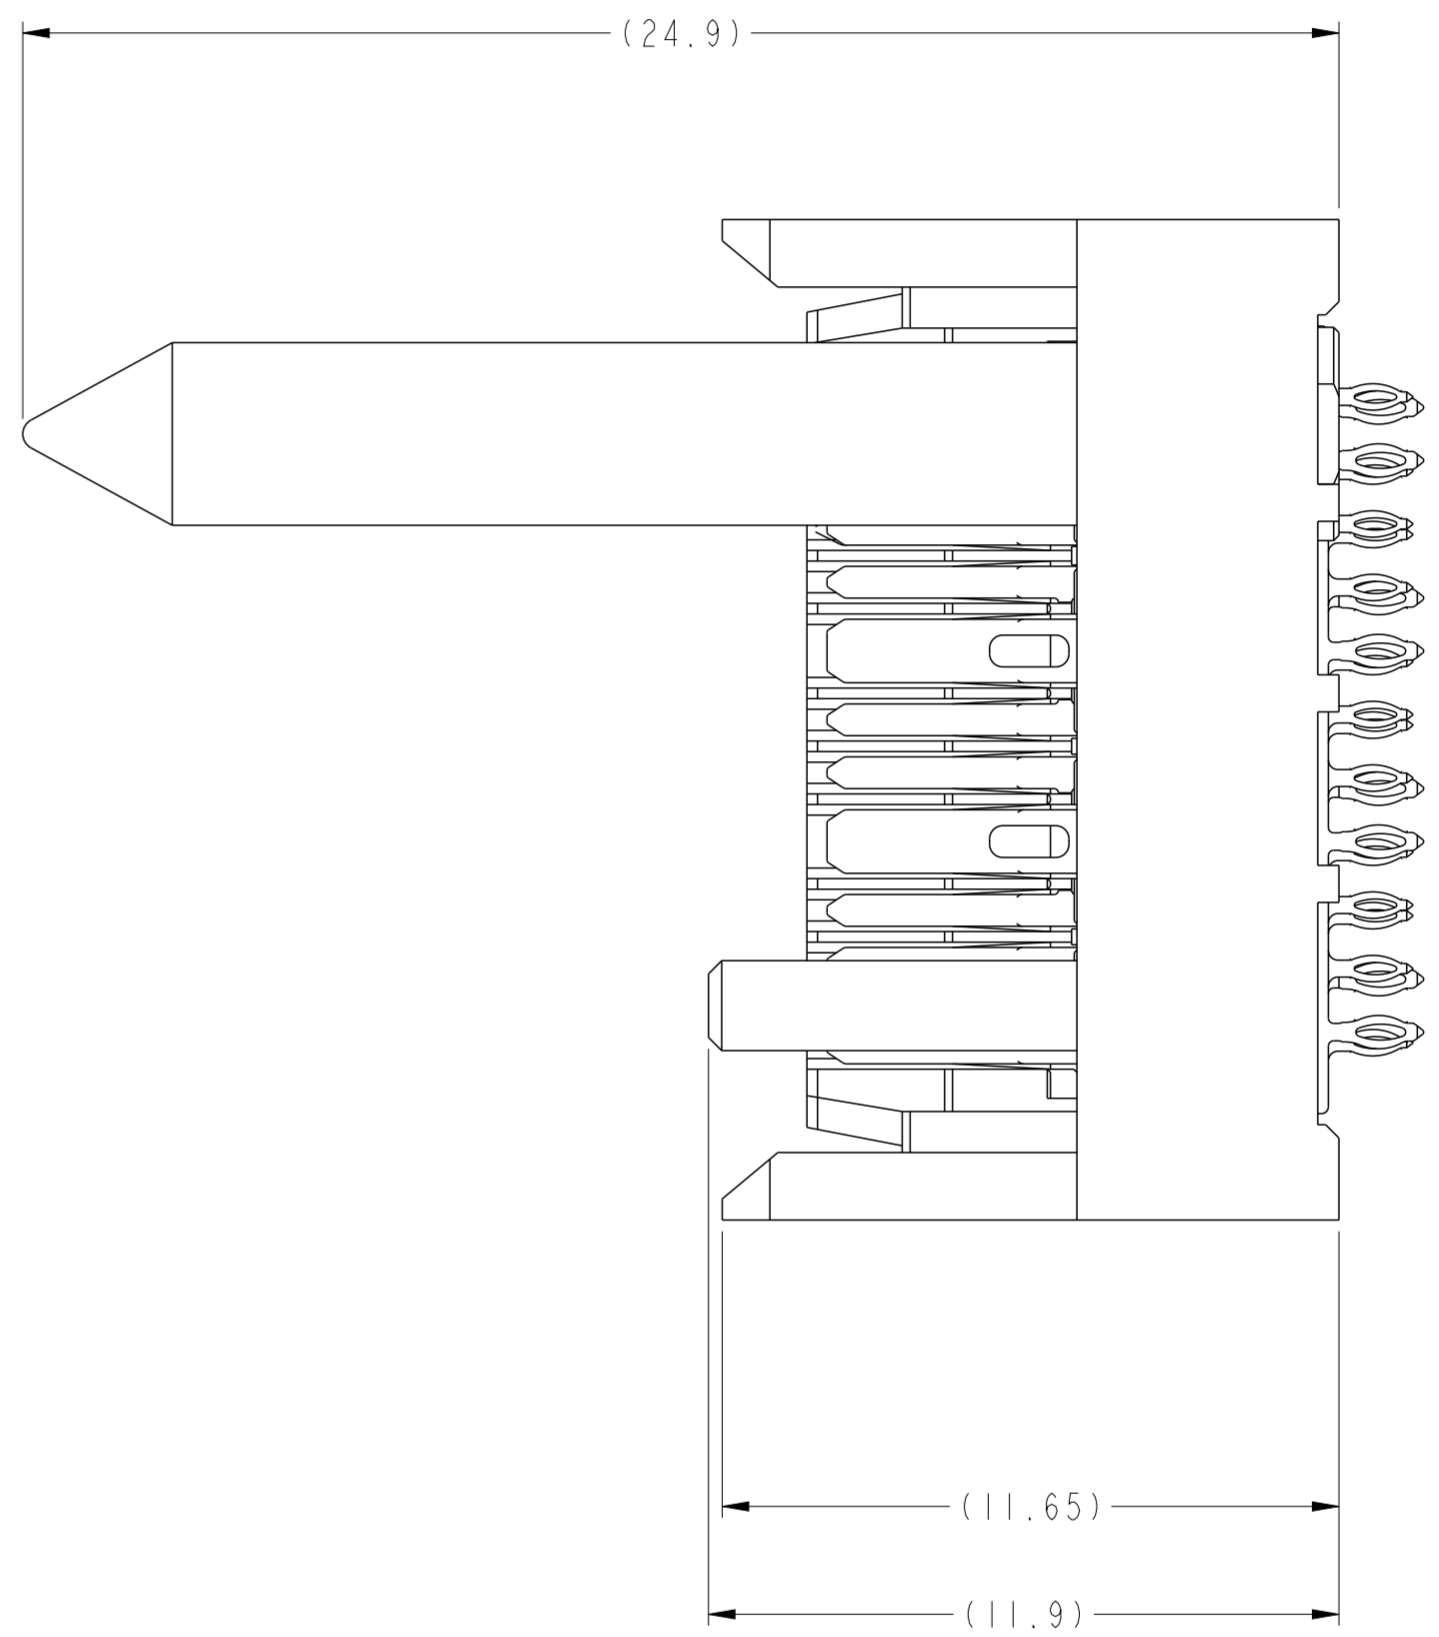
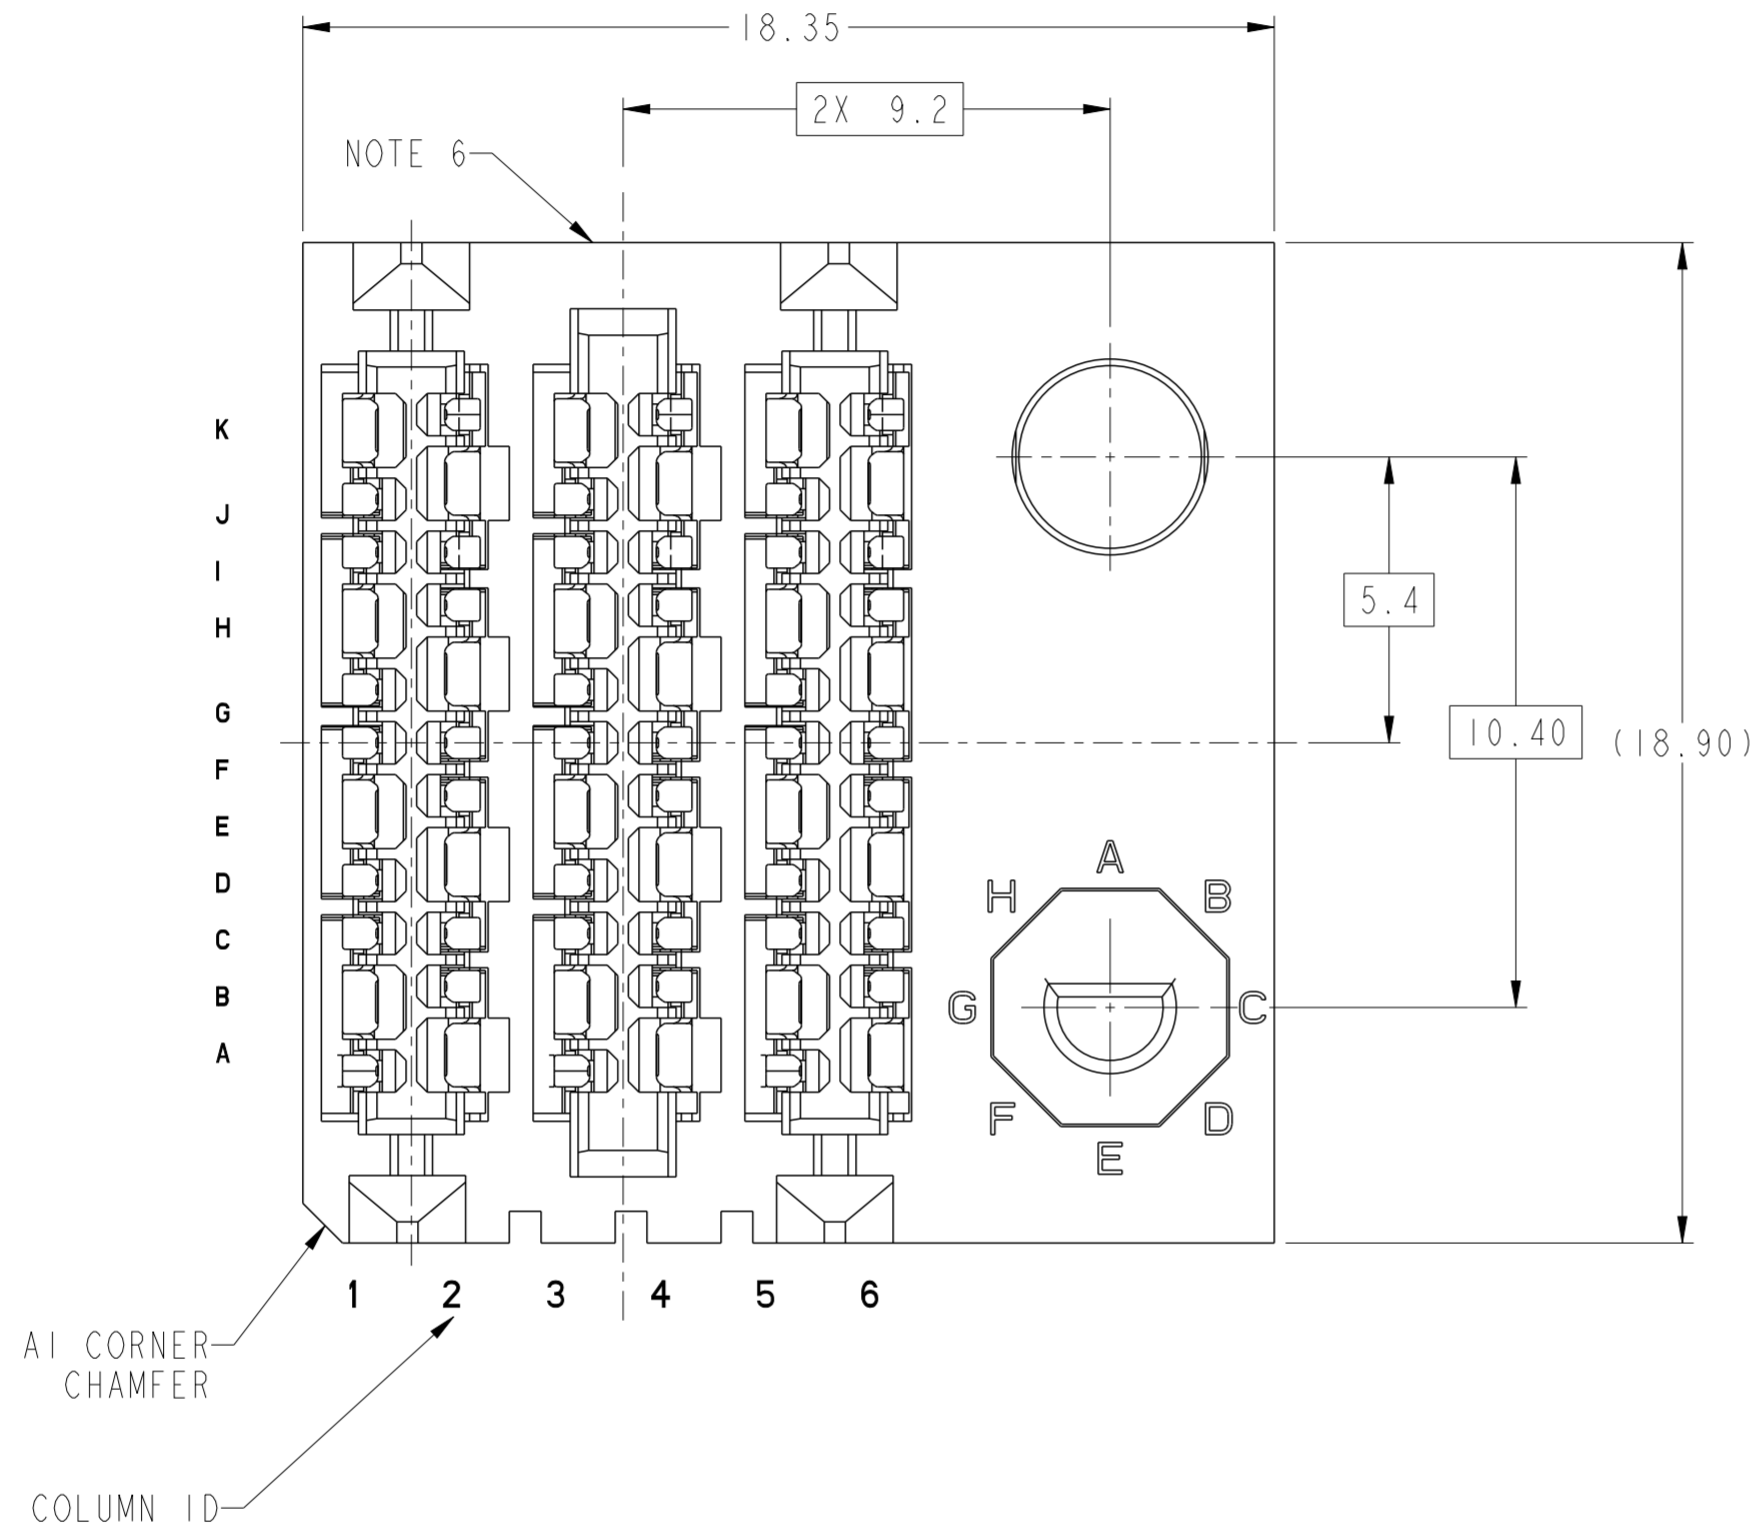
D

E

F



Amphenol
FCi

© 2016 AFCi



10128349-Y2ALF THRU -Y2JLF
LEFT GUIDANCE CONNECTOR (SEE NOTE 17)
FOR ALL OTHER DIMENSIONS SEE SHEET 1
SCALE 7:1

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	3:1									
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary									
ASME Y14.5M		chr	-	cat. no.			Product - Customer Drw												
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±.3		0.XX	±.10		0.XXX	±.050	angular	0°	±2°	Amphenol FCi	title ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA		product family ExaMAX	dwg no 10128349	rev 7
linear	0.X	±.3																	
	0.XX	±.10																	
	0.XXX	±.050																	
angular	0°	±2°																	

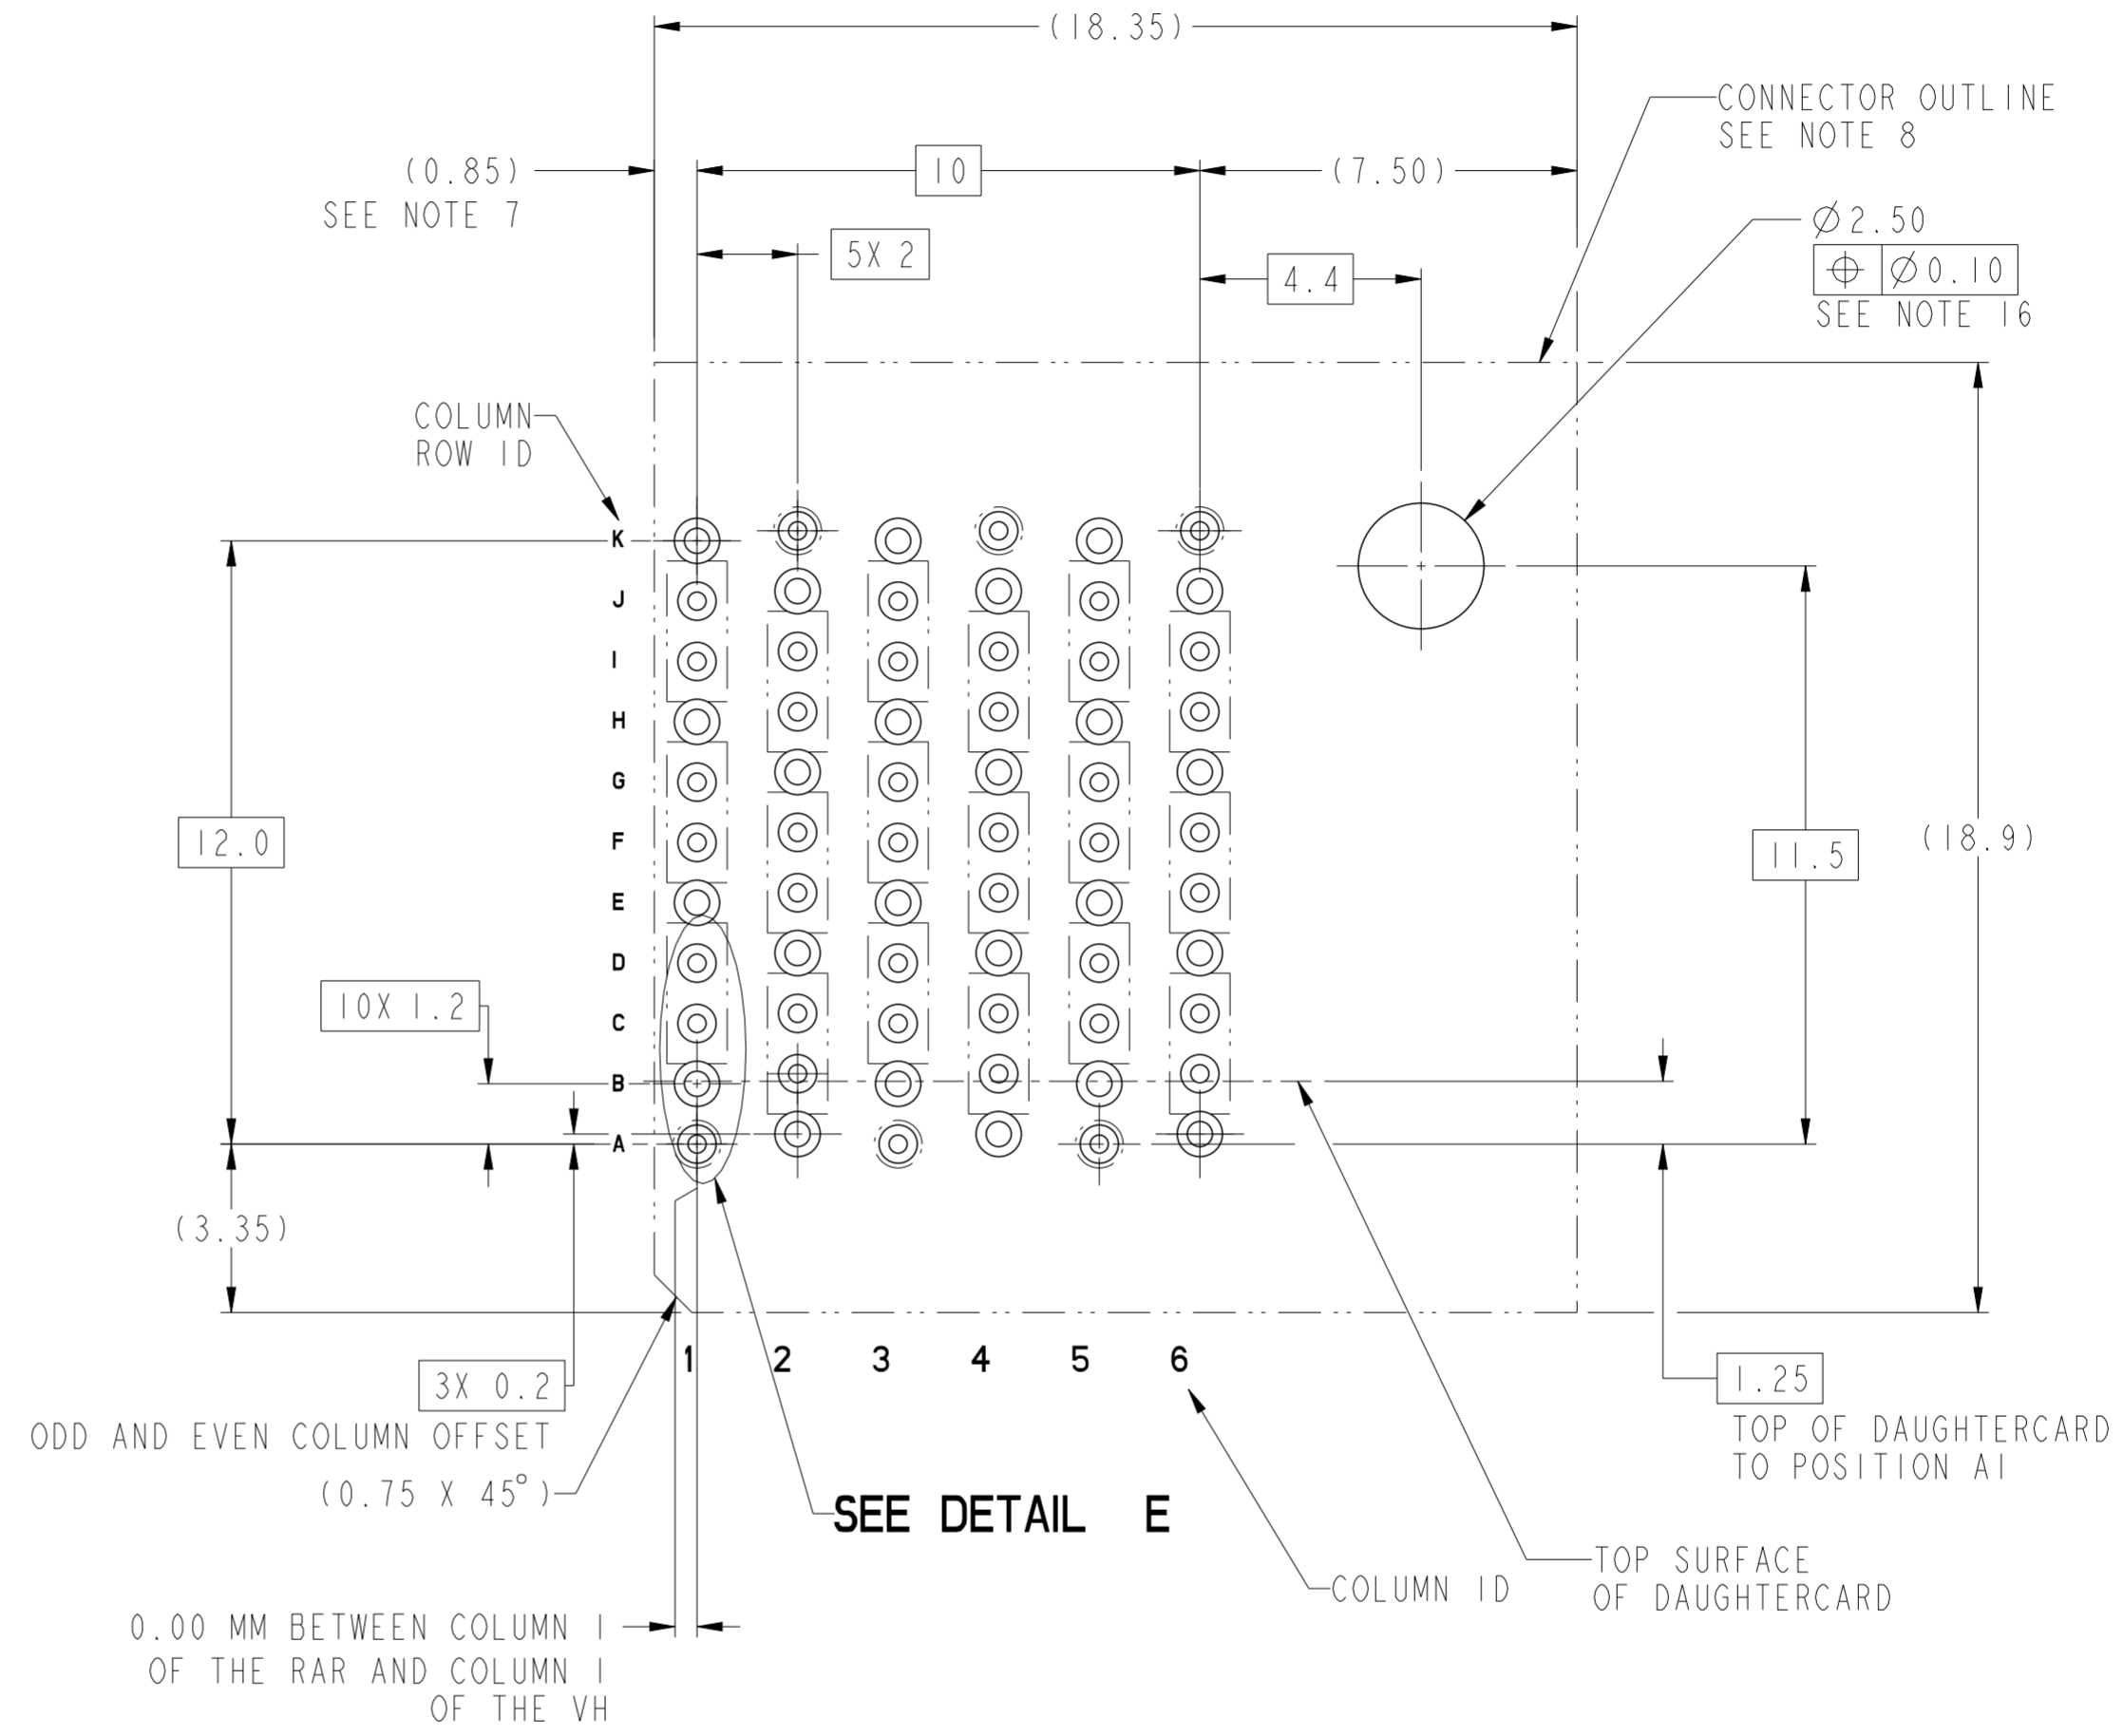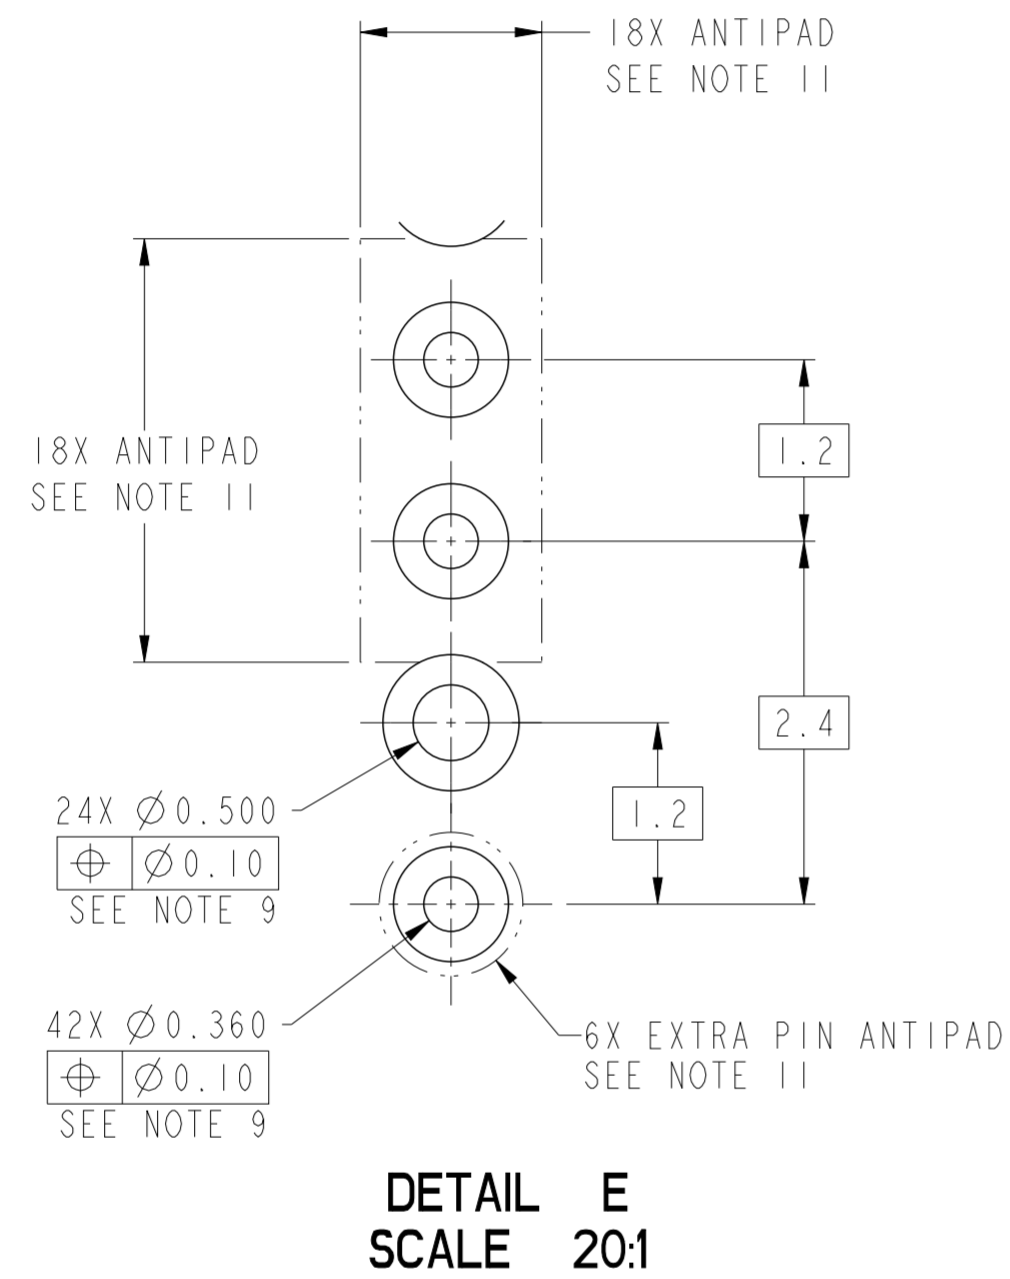

RECOMMENDED PCB LAYOUT FOR
10128349-Y2YLF COMPONENT SIDE
SEE NOTES 7, 8, 9, 11 & 16
SCALE 7:1






















spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	2:1		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13			ecn no	-	rel level	Preliminary		
ASME Y14.5M		chr	-	appr							-	product family
surface	linear	0.X	±.3	0.XX	±.10	0.XXX	±.050	Amphenol FCI		ExaMAX VERTICAL HEADER ASS'Y, 3 PAIR, 66 POS, 6 IMLA	dwg no 10128349	rev 7
	angular	0°	±2°	cat. no.		Product - Customer Drw		sheet 9 of 11				

Amphenol FCI


© 2016 APCI

10128349 - Y Y Y L F

ASSEMBLY PART NUMBER	DESCRIPTION
10128349-1YYLF	STANDARD MATE
10128349-2YYLF	ADVANCED MATE
10128349-3YYLF	SHORT DETECT
10128349-4YYLF	ADVANCED MATE & SHORT DETECT

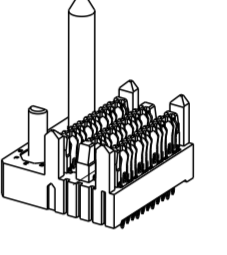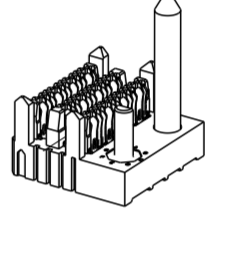MODULE DESCRIPTION	DESIGNATION REPRESENTED IN DASH NUMBER									BASE MODULE
STANDARD NO GUIDANCE (SEE SHEET 1)	01									
RIGHT GUIDANCE MODULE (SEE SHEET 6)	1A	1B	1C	1D	1E	1F	1G	1H	1J (NO KEY)	
										
LEFT GUIDANCE MODULE (SEE SHEET 8)	2A	2B	2C	2D	2E	2F	2G	2H	2J (NO KEY)	
										

Amphenol FCI

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	5:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13		← →	ecn no	-	rel level	Preliminary
ASME Y14.5M		chr	-	-						
surface		appr	-	-						
	linear	0.X	±.3	Amphenol FCI	title	ExaMAX VERTICAL HEADER	dwg no	10128349	rev	7
		0.XX	±.10							
		0.XXX	±.050							
	angular	0°	±2°	cat. no.		Product - Customer Drw	sheet 10 of 11			

© 2016 AFCI

NOTES:

- ① - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
GUIDE PIN: ZINC ALLOY
POLERIZING PIN: ZINC ALLOY
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE

PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)
- 3 - PRODUCT SPECIFICATION: GS-12-1096
- 4.- APPLICATION SPECIFICATION GS-20-0361.
- 5 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- ⑥ - PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.
- ⑦ - THE MINIMUM VIA SPACING BETWEEN STACKED CONNECTORS WILL BE 2.0 mm OR 3.0 mm AS DEFINED BY NOTE 7 ON THE MATING RECEPTACLE CUSTOMER DRAWING. REFER TO THE APPLICATION SPECIFICATION FOR DETAILS.
- ⑧ - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- ⑨ - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
- 10 - THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
- ⑪ - REFER TO APPLICATION SPECIFICATION FOR TRACE ROUTING EXAMPLES THAT INCLUDE DIMENSIONS FOR ANTIPADS, TRACE WIDTH, TRACE SPACING, ETC.
- 12 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260° C FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑬ - THE ADVANCED MATE HEADER, 10128349-2YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑭ - THE SHORT DETECT HEADER, 10128349-3YYLF, WHEN MATED WITH A STANDARD MATE RECEPTACLE WILL PROVIDE 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑮ - THE ADVANCED MATE /SHORT DETECT HEADER, 10128349-4YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS, AND 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑯ - FOR CONNECTOR WITH EITHER A LEFT OR RIGHT GUIDE MODULE, ONE PHILLIPS PAN HEAD M2 HOLD DOWN SCREW MUST BE USED TO SECURE GUIDE PIN/CONNECTOR TO THE PCB. THE SCREW LENGTH SHALL BE 2.0 - 6.0mm PLUS THE THICKNESS OF THE BOARD. SCREW IS NOT PROVIDED WITH CONNECTOR.
- ⑰ - LEFT / RIGHT INTEGRATED GUIDE ORIENTATION IS DETERMINED BY THE LOCATION OF THE GUIDE FEATURES WHEN LOOKING AT THE MATING FACE OF THE RIGHT ANGEL RECEPTACLE. THE LEFT / RIGHT DESIGNATION OF THE MATING HEADER IS DEFINED BY THE RIGHT ANGEL RECEPTACLE THAT IT MATES WITH (i. e. A RIGHT GUIDE VERTICAL HEADER MATES A RIGHT GUIDE RIGHT ANGEL RECEPTACLE.)
- ⑱ - ALL GROUND CONTACTS ARE COMMONED WITHIN A COLUMN.

spec ref	SEE NOTES	dr	Daniel Xiao	2014/02/19	projection	MM	size	A2	scale	2:1			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Terry Luo	2016/04/13		← →	ecn no	-	rel level	Preliminary			
ASME Y14.5M		chr	-	-			product family	ExaMAX					
surface	linear	0.X	±.3	Amphenol FCi	title	ExaMAX VERTICAL HEADER	dwg no	10128349	rev	7			
✓		0.XX	±.10								cat. no.	Product - Customer Drw	sheet 11 of 11
		0.XXX	±.050										
	angular	0°	±2°										

Amphenol
FCi

© 2016 AFci