
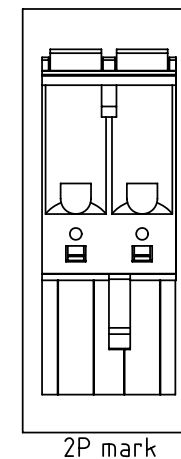
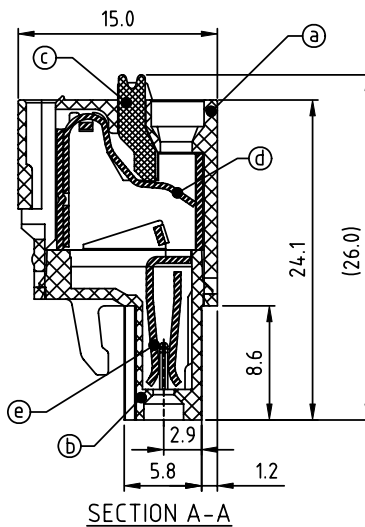
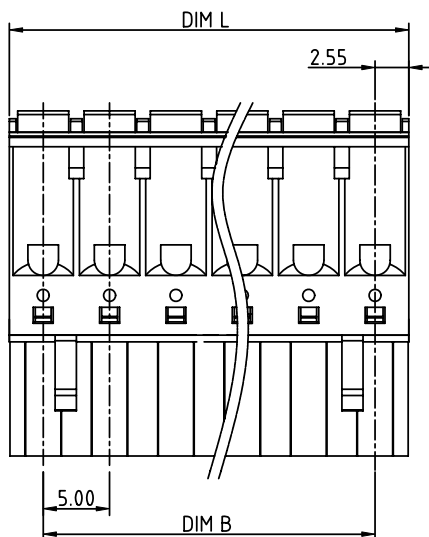


PRODUCT NUMBER	PITCH
HWxx70x000J0G	5.00 mm

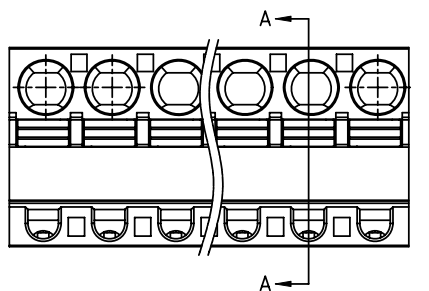

Material:

- Item a Top body: Thermoplastic (UL94V-0)
- Item b Bottom body: Thermoplastic (UL94V-0)
- Item c Terminal lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)
- Item d Spring clamp: Stainless Steel
- Item e Female contact: PhBz (CuSn) Tin plated

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Solid wire (AWG): 12-26
- Stranded wire (AWG): 12-26
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 

PART NO.: HW xx 7 0 x 0 00J0 G

N=Number of poles

Dim L=N×5.00+0.10

Dim B=(N-1)×5.00

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

Solid block
No. of poles
02 2 poles
03 3 poles
...
24 24 poles

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Green (RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK				
ltr	ecn	no	dr	date	tolerances unless otherwise specified						title			
					angles about	X.±0.5					TERMINAL BLOCK			
						X.X±0.3					SPRING CLAMP, PLUGGABLE PLUG,			
						X°.XX±0.1					CONTACT ON DOWN SIDE			
					dr	EVIN ZHONG	051514			dwg no		sheet 1 of 1		size
					engr	EVIN ZHONG	051514			HWxx70x000J0G		A		
					chr	HANKE FENG	051514							
					appd	SHI JUN	051514							
sheet index	revision	A												
	sheet	1												