




P0311 Product Details

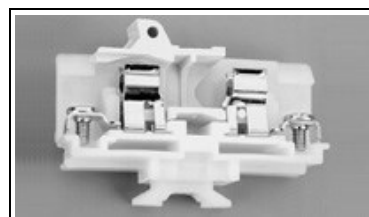

P0311 (4-1437397-0)

TE Internal Number: 4-1437397-0

[Active](#)

[View 3D PDF](#)

NEMA Terminal Blocks

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- 0300 Series Block Series
- NEMA Product Line
- Block Type = Dovetail Base
- Contact Configuration = Strap Screw
- In-Line Circuit Protection Application

[View all Features](#)

Quick Links

- [Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [CONTACT SECTION W/ FUSE PULLER & TUBULAR CONTACT \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- [BUCHANAN TERMINAL BLOCKS CATALOG - NEMA TERMINAL BLOCKS \(PDF, English\)](#)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version A\)](#)
- [3D Model \(IGES, Version A\)](#)
- [3D Model \(STEP, Version A\)](#)

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Line Drawing](#)
- [Typical Mounting Configuration](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Block Series](#) = 0300 Series
- Product Line = NEMA
- [Block Type](#) = Dovetail Base
- Screw Size = 10-32 Binding Head

Electrical Characteristics:

- Voltage Rating (VAC) = 600
- Amperes (A) = 25.0

Body Features:

- Mount Style = Channel Mount (Dovetail Base) or Direct Mount
- [Wire Range \(Solid and Stranded\)\[MCM\] \(AWG\)](#) = 22-8
- [Blown Fuse Indicator](#) = Without
- [Blown Fuse Indicator Type](#) = None

Contact Features:

- Contact Configuration = Strap Screw
- Pitch (mm [in]) = 19.05 [0.750]

Housing Features:

- [Housing Material](#) = Polypropylene

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Flammability Rating = UL 94V-0

Conditions for Usage:

- Temperature, Max. (°C) = 105

Operation/Application:

- Application = In-Line Circuit Protection

Packaging Features:

- Terminals Per Foot = 16

Other:

- Brand = Buchanan

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility
Plan](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Manage Your Account](#)

