

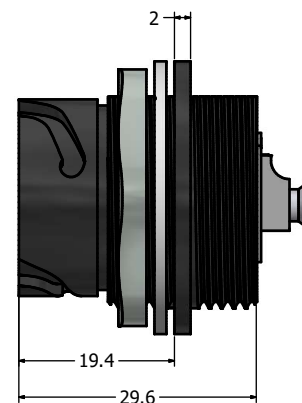
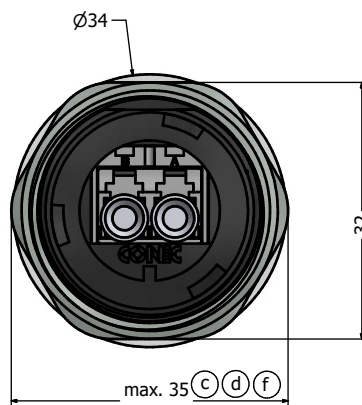
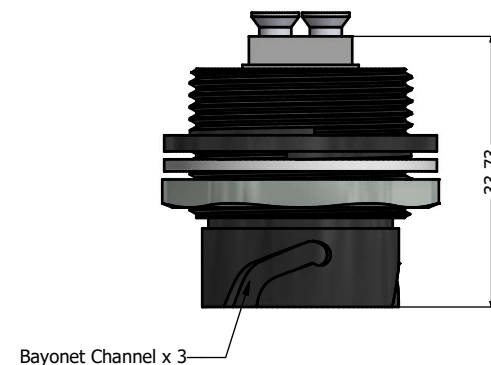
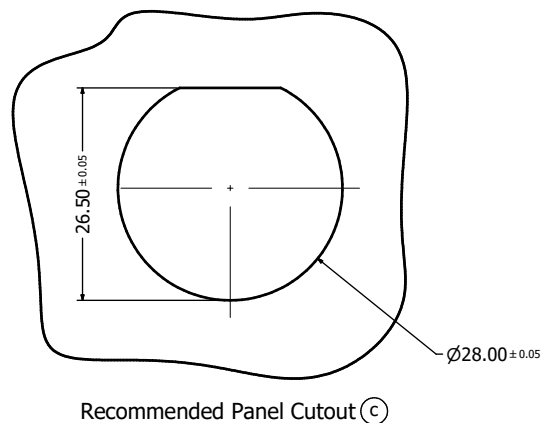


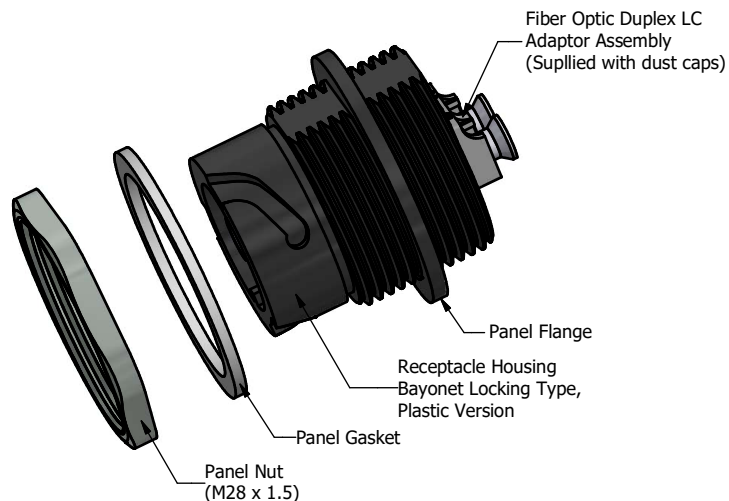

Notes:

1. Material and Finish:

- Receptacle Housing: Polyester (Black); UL94 V-0
- Panel Nut: Brass, Finish: Nickel Plated
- Panel Gasket: Silicone, Color: White
- Duplex LC Adaptor Assembly:
- Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green** (b)
- Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
- Dust Cap: PP, Color: Neutral transparent
- Operating Temperature: -40~C to +85~C

2. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

(e) 3. IP67/IP68 rated when covered or fully mated with the appropriate mating connector

(d) 4. Recommended Mounting Panel Nut torque is 20 to 25 lb-inch

Description	Part Number
Single Mode (SM)	17-300010
Multi Mode (MM)	17-300020
(c) APC Single Mode (APC SM)	17-300170

RoHS compliant

Customer:				Tolerance Unless otherwise specified		Autodesk Inventor	Scale: 1.5:1	Dim. in mm
Name	Title	Approval Date	(d)	0 PLC ± 0.50	1 PLC ± 0.38		Material: See Notes	
1 x f	A21-0426	25.10.2021	Bub	2 PLC ± 0.25	3 PLC ± 0.10	2008 Date Name	Title: IP67 Industrial Duplex LC Receptacle Assembly Kit Plastic Version	
e	1 x e	Dec/03/2015	Vincent Ke	Angles ± 3°		Draw. Jun. 06 Vincent Ke		
d	3 x d	Sep/25/2013	Vincent Ke			Appd. Jun. 06 J. Chaudry	Drawing No.: 17K1A002	
c	3 x c	Feb/25/2011	Vincent Ke			Norm		
b	1 x b	May/28/2009	Vincent Ke			D-old	Part No.: SEE PART NUMBER TABLE	
a	Original							
Rev.	Changes	Date	Name	CONEC			Sheet 1/1	