



SYM	ECN	DESCRIPTION	DATE	APPROVED
0A	---	FIRST RELEASE	08/01'24	Dam

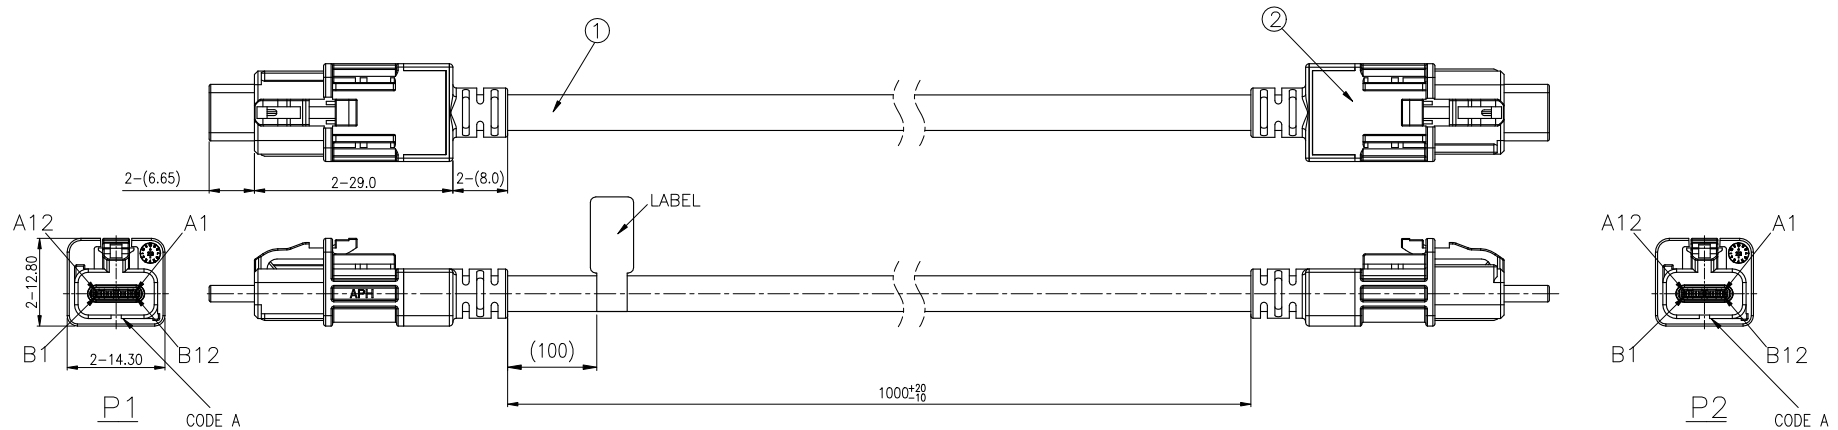


LABEL:

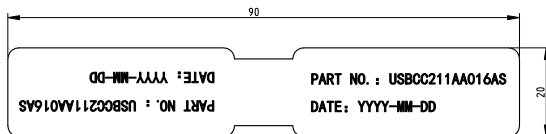


NOTES:

- PRODUCT MUST COMPLY TO THE LATEST LEVEL OF SAE/USCAR30.
- ELECTRICAL PERFORMANCE:
CURRENT RATING: 5A
INSULATION RESISTANCE: 5MΩ MIN. (200V DC)
- MECHANICAL PERFORMANCE:
DURABILITY: 10 CYCLES MIN.
TEMPERATURE RANGE: -40°C TO +105°C
- MATERIAL SHOULD BE FULFILLED RoHS REQUIREMENT AND AMPHENOL SPEC# SSN002.

5. ORDER P/N SYSTEM:

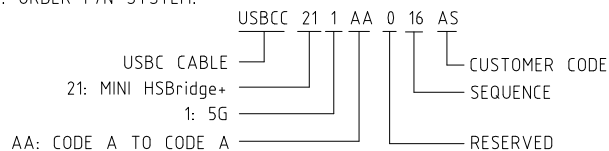

WIRE LIST:

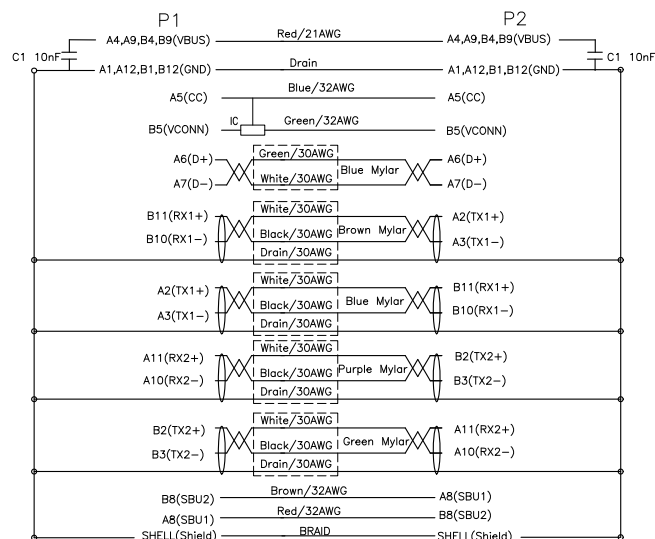

HF(无卤)	
Non-HF(有卤)	✓

2	CONNECTOR	MINI HSBridge+ USB PLUG CABLE CONNECTOR CODE-A	2
1	RAW CABLE	USB3.1 FEP,(30AWG-1P+EAM)×4×(30AWG-1P+AM)×(32AWG-1C)×4×21AWG×1C,0D5.2	A/R
ITEM	NAME	DESCRIPTION	QUANTITY
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC			
0	±0.00	±0.00	±0.00
0.00	±0.00	±0.00	±0.00
FRACTIONS	±0.00	±0.00	±0.00
ANGLES	±0.00	±0.00	±0.00
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES			
DIMENSIONS U.S. INCHES (METRIC) (MM)			
APPROVAL DATE			
DRAWN Simon 08/01'24			
CHECKED Johnny 08/01'24			
DRAWING FILE :			
ANGLE OF PROJECTION			
TITLE			
CUSTOMER DRAWING FOR MINI HSBridge+ USB PLUG TO PLUG CABLE, CODE A-A, L=1000MM			
SIZE DRAWING NO. REV.			
A3 USBCC211AA016AS 0A			
SCALE N/A SHEET 1 OF 1			