




SYM	ECN	DESCRIPTION	DATE	APPROVED
0A	---	FIRST RELEASE	08/01'24	Dam

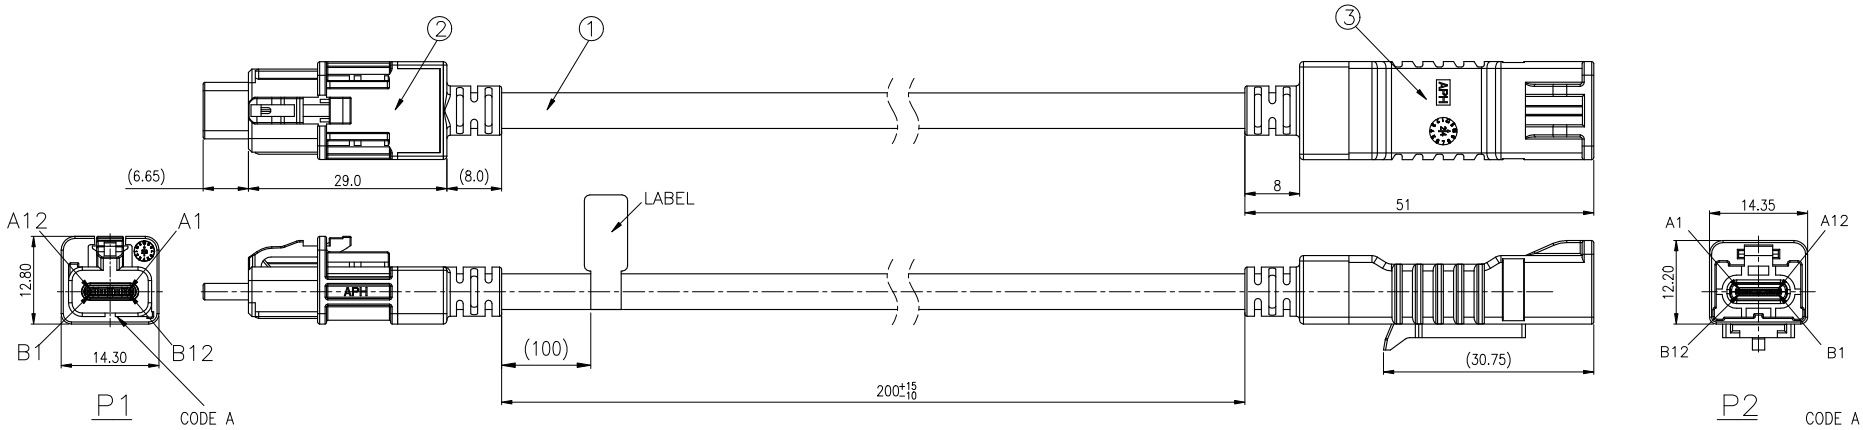

LABEL:

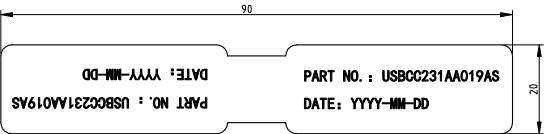


WIRE LIST:

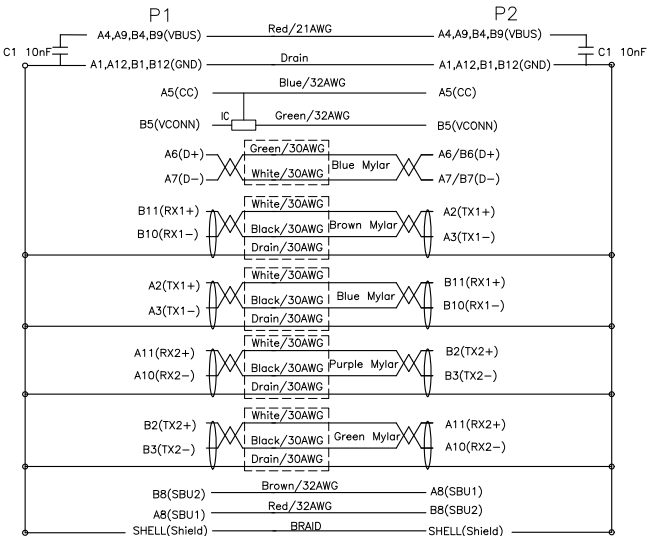

NOTES:

- PRODUCT MUST COMPLY TO THE LATEST LEVEL OF SAE/USCAR30.
- ELECTRICAL PERFORMANCE:
CURRENT RATING: 5A
INSULATION RESISTANCE: 5MΩ MIN. (200V DC)
- MECHANICAL PERFORMANCE:
DURABILITY: 10 CYCLES MIN.
TEMPERATURE RANGE: -40°C TO +105°C
- MATERIAL SHOULD BE FULFILLED RoHS REQUIREMENT AND AMPHENOL SPEC# SSN002.
- ORDER P/N SYSTEM:

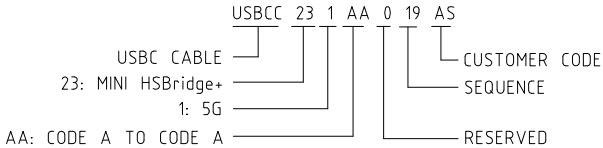

HF(无卤)
Non-HF(有卤) ✓

3	CONNECTOR	MINI HSBRIDGE+ USB INLINE CABLE CONNECTOR CODE-A	1
2	CONNECTOR	MINI HSBRIDGE+ USBC PLUG CABLE CONNECTOR CODE-A	1
1	RAW CABLE	USB3.1 FEP,(30AWG-1P+EAM)×4+(30AWG-1P+AM)×(32AWG-1C)×4+21AWG×1C,005.2	A/R
ITEM	NAME	DESCRIPTION	QUANTITY
UNLESS OTHERWISE SPECIFIED TOLERANCES			
U.S.		APPROVAL	DATE
0 +/-		DRAWN Simon	08/01'24
0.00 +/-		CHECKED Johnny	08/01'24
FRACTIONS +/-		Amphenol	
ANGLES +/-		Amphenol East Asia Limited	
FOR MATERIALS AND FINISHES SEE NOTES		TITLE	
REMOVE SHARP EDGES		CUSTOMER DRAWING FOR MINI HSBRIDGE+ USBC PLUG TO INLINE CABLE, CODE A-A, L=200MM	
DIMENSIONS		SIZE DRAWING NO.	
U.S. INCHES		A3 USBCC231AA019AS	
(METRIC) (MM)		SCALE N/A	
ANGLE OF PROJECTION		REV. 0A	
		SHEET 1 OF 1	