

# 6.3x32mm glass fuses


## 6.3x32mm glass, quick blow

| PART NO.       | RATING | PART NO.       | RATING |
|----------------|--------|----------------|--------|
| CFB06332F/100  | 100mA  | CFB06332F/3    | 3A     |
| CFB06332F/125  | 125mA  | CFB06332F/3.15 | 3.15A  |
| CFB06332F/160  | 160mA  | CFB06332F/4    | 4A     |
| CFB06332F/200  | 200mA  | CFB06332F/5    | 5A     |
| CFB06332F/250  | 250mA  | CFB06332F/6.3  | 6.3A   |
| CFB06332F/500  | 500mA  | CFB06332F/7    | 7A     |
| CFB06332F/630  | 630mA  | CFB06332F/7.5  | 7.5A   |
| CFB06332F/750  | 750mA  | CFB06332F/8    | 8A     |
| CFB06332F/1    | 1A     | CFB06332F/10   | 10A    |
| CFB06332F/1.25 | 1.25A  | CFB06332F/12   | 12A    |
| CFB06332F/1.5  | 1.5A   | CFB06332F/12.5 | 12.5A  |
| CFB06332F/1.6  | 1.6A   | CFB06332F/15   | 15A    |
| CFB06332F/2    | 2A     | CFB06332F/20   | 20A    |
| CFB06332F/2.5  | 2.5A   | CFB06332F/25   | 25A    |

CFB06332F



CFB06332T



## 6.3x32mm glass, time delay

| PART NO.       | RATING | PART NO.       | RATING |
|----------------|--------|----------------|--------|
| CFB06332T/100  | 100mA  | CFB06332T/2.5  | 2.5A   |
| CFB06332T/125  | 125mA  | CFB06332T/3    | 3A     |
| CFB06332T/160  | 160mA  | CFB06332T/3.15 | 3.15A  |
| CFB06332T/200  | 200mA  | CFB06332T/4    | 4A     |
| CFB06332T/250  | 250mA  | CFB06332T/5    | 5A     |
| CFB06332T/500  | 500mA  | CFB06332T/6    | 6A     |
| CFB06332T/630  | 630mA  | CFB06332T/6.3  | 6.3A   |
| CFB06332T/750  | 750mA  | CFB06332T/7    | 7A     |
| CFB06332T/800  | 800mA  | CFB06332T/7.5  | 7.5A   |
| CFB06332T/1    | 1A     | CFB06332T/8    | 8A     |
| CFB06332T/1.25 | 1.25A  | CFB06332T/10   | 10A    |
| CFB06332T/1.5  | 1.5A   | CFB06332T/12   | 12A    |
| CFB06332T/1.6  | 1.6A   | CFB06332T/12.5 | 12.5A  |
| CFB06332T/2    | 2A     | CFB06332T/15   | 15A    |

### Product overview


- Quick blow (F)
- Excellent I<sup>2</sup>T characteristics
- Welded element for enhanced vibration tolerance
- Glass cartridge, nickel plated brass end caps
- Break capacity  
35A/250V (to 1A),  
100A/250V (to 3.5A),  
200A/250V (above 3.5A)
- Operating temperature -55°C to +125°C
- approved (500mA-3A) (4A-10A) (12A-15A)

### Product overview

- Time delay (T)
- Excellent I<sup>2</sup>T characteristics
- Welded element for enhanced vibration tolerance
- Glass cartridge, nickel plated brass end caps
- Break capacity  
35A/250V (to 1A),  
100A/250V (to 3.5A),  
200A/250V (above 3.5A)
- Operating temperature -55°C to +125°C
- approved (500mA-1A) (1.5A-3A) (4A) (10A-15A)

#### CFB06332F

Average time current (I-T curves)

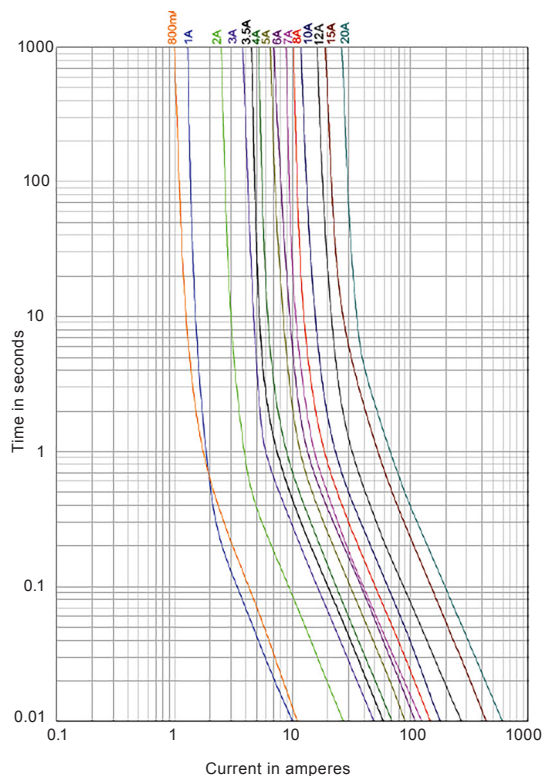

#### CFB06332T

Average time current (I-T curves)

