

POTTER & BRUMFIELD KUP SERIES PANEL PLUG-IN RELAY

GENERAL PURPOSE PANEL/PLUG-IN RELAYS

INTRODUCTION

TE Connectivity (TE)'s Potter & Brumfield KUP Series Panel Plug-In Relay is a reliable solution for industrial and commercial applications. It supports AC (12-240V) and DC (5-110V) coils, with multiple contact configurations and mounting options. Features like push-to-test buttons, indicator lamps, and Class B coil insulation enhance usability. Compatible sockets for panel, DIN rail, or PCB mounting ensure easy installation.

FEATURES

- AC coils: 12-240VAC, 50/60 Hz.; DC coils 5-110VDC
- Contact arrangements of 1-3 form C
- Wide selection of termination and mounting styles
- PC terminals available
- Push-to-test button and indicator lamp options
- Sockets available for panel, DIN rail or PCB mounting
- Class B coil insulation

APPLICATIONS

- Vending
- Commercial sewing
- Tool/die equipment
- Robotics
- Timers
- Welding
- HVAC
- Medical
- Power generators



APPROVALS

- UL E214025
- CSA LR15734

Technical data of approved types on request



POTTER & BRUMFIELD KUP SERIES PANEL PLUG-IN RELAY

Panel/Plug-in Relays

CONTACT DATA

Contact arrangement	1-3 form C (CO)	
Rated voltage	240VAC	
Rated current	10A	
Contact material	Ag, AgCdO	
Contact material	Ag	AgCdO
Min. recommended contact load	100mA, 12VDC	300mA, 12VDC
Frequency of operation	360 ops./hour	360 ops./hour
Operate/releases time max.	15/10ms	
Bounce time max.	17ms	

CONTACT RATINGS

Type	Load	Cycles	Type	Load	Cycles		
UL 508			AgCdO, 1, 2 and 3 pole	5A, 120VAC, tungsten	-		
Ag, 1, 2 and 3 pole	5A, 240VAC	-		1/2HP, 250VAC	-		
	5A, 28VDC	-		0.5A, 125VDC	-		
	1/6HP, 120VAC	-		10FLA, 40LRA, 125VAC	-		
	2.5A, 120VAC, tungsten	-		3A, 600VAC	-		
	1/3HP, 240VAC	-		1/2HP, 480VAC	-		
	0.5A, 120VDC	-		1/2HP, 600VAC	-		
	5FLA, 15LRA, 250VAC	-		1HP, 480 VAC, 3 phase	-		
	AgCdO, 1, 2 and 3 pole	10A, 240VAC		-	Mechanical endurance		10x10 ⁶ ops.
10A, 32VDC		-					
5FLA, 15LRA, 250VAC		-	Note: Indicated contact ratings and electrical endurance data apply only for direct wiring of the relay (according to UL 508/61810-1); for relays mounted on sockets, deratings may				
1/3HP, 120VAC		-					

POTTER & BRUMFIELD KUP SERIES PANEL PLUG-IN RELAY

Panel/Plug-in Relays

COIL DATA

Coil voltage range	5 to 110VDC 12 to 240VAC
Coil insulation system according UL	Class B

COIL VERSIONS, DC COIL

Coil code	Rated voltage VDC	Operate voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
1, 2 and 3 pole				
5	5	3.75	21	1.2
6	6	4.5	32.1	1.125
12	12	9.0	120	1.2
24	24	18.0	472	1.25
36	36	27.0	1080	1.2
48	48	36.0	1800	1.3
110	110	82.5	10000	1.25

All figures are given for coil without preenergization, at ambient temperature +23°C.

COIL VERSIONS, AC COIL

Coil code	Rated voltage VDC	Operate voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
1 and 2 pole				
12	12	10.2	24	2.0
24	24	20.4	85	2.0
120	120	102.0	2250	2.1
240	240	204.0	9110	2.1
3 pole				
12	12	10.2	18	2.8
24	24	20.4	72	2.8
120	120	102.0	1700	2.9
240	240	204.0	7200	2.9

INSULATION DATA

Initial dielectric strength	
between open contacts	1200Vrms
between contact and coil	2200Vrms
between adjacent contacts	2200Vrms
Initial insulation resistance	
between insulated elements	100M Ω , 500VDC

ACCESSORIES

For details see datasheet	Sockets and Accessories, KUP Relays
---------------------------	--

Product Code	Description	TE Part Number
27E893	DIN socket (use 20C318 clip)	2-1419106-5
27E121	Track mount socket (use 20C314 clips)	1393143-5
27E043	Chassis mount/solder eyelet socket (use 20C254 clip)	1393143-1
27E046	Chassis mount/PCB socket (use 20C254 clip)	1419106-4
27E067	Chassis mount/quick connect socket (use 20C254 clip)	1393143-2
27E396	Snap-in/quick connect socket (use 20C254 clip)	3-1393143-8



OTHER DATA

Material compliance	EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter
Ambient temperature	
DC coil	Enclosed relays, 1-3 pole: -45°C to 70°C
AC coil	Enclosed relays, 3 pole: -45°C to +45°C
	Enclosed relays, 1 and 2 pole: -45°C to +55°C
Category of environmental protection	
IEC 61810	RTI - dust protected
Terminal type	Quick connects (QC), .187 PCB-THT
Terminal retention, push force	
QC .187PCB	25 lbs for 3s
Weight	85g
Packaging unit	tray/25 pcs., box/150pcs.

POTTER & BRUMFIELD KUP SERIES PANEL PLUG-IN RELAY

Panel/Plug-in Relays


MAXIMUM ALLOWABLE AMBIENT TEMPERATURE VS VOLTAGE (KUP ENLCOSED)




DIMENSIONS (Unit:mm)

RELAY FRONT DIAGRAMS

1-3 pole models




KUP PLAIN CASE

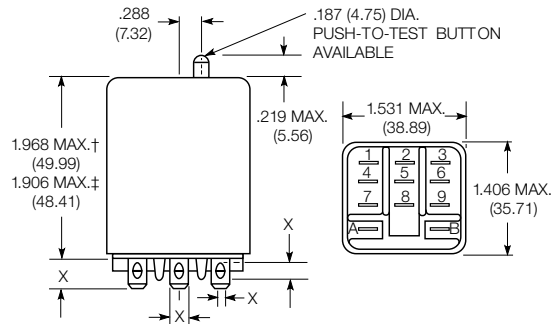

X Is For Terminal Dimensions.
See Teminal Drawings.

KUP CORE / STUD MOUNT CASE

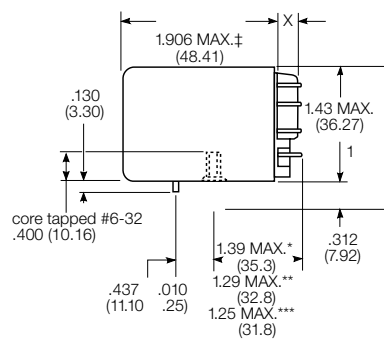


† Dimensions with .187" (4.75mm and .205" 5.21mm) terminals

***Dimensions with .187" (4.75mm) terminals.


POTTER & BRUMFIELD KUP SERIES PANEL PLUG-IN RELAY

Panel/Plug-in Relays

KUP TOP FLANGE CASE

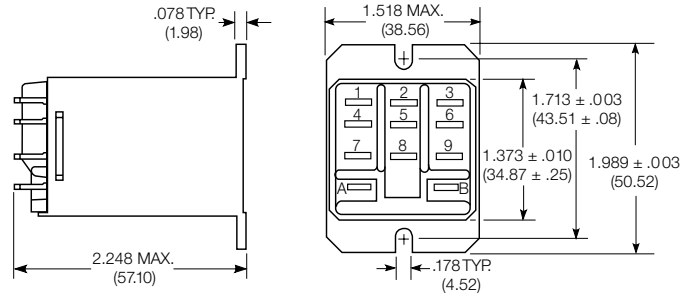


KUP BRACKET MOUNT CASE

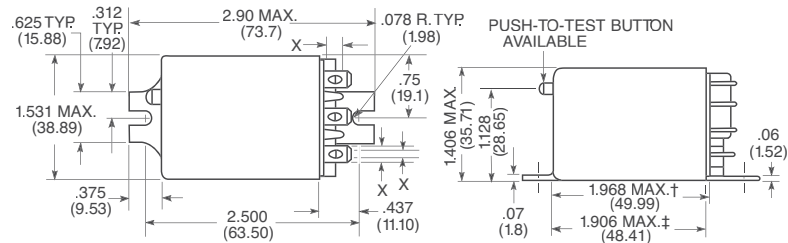


TERMINAL DIMENSIONS

4.75mm (.187) quick connect




1.19mm (.047) printed circuit

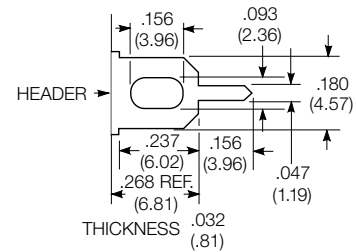


TERMINAL ASSIGNMENT


1 form C



2 form C



3 form C




PCB LAYOUT


Bottom view on solder pins

3 Pole Version

(Omit unnecessary holes for 2 pole types)



PRODUCT CODE STRUCTURE

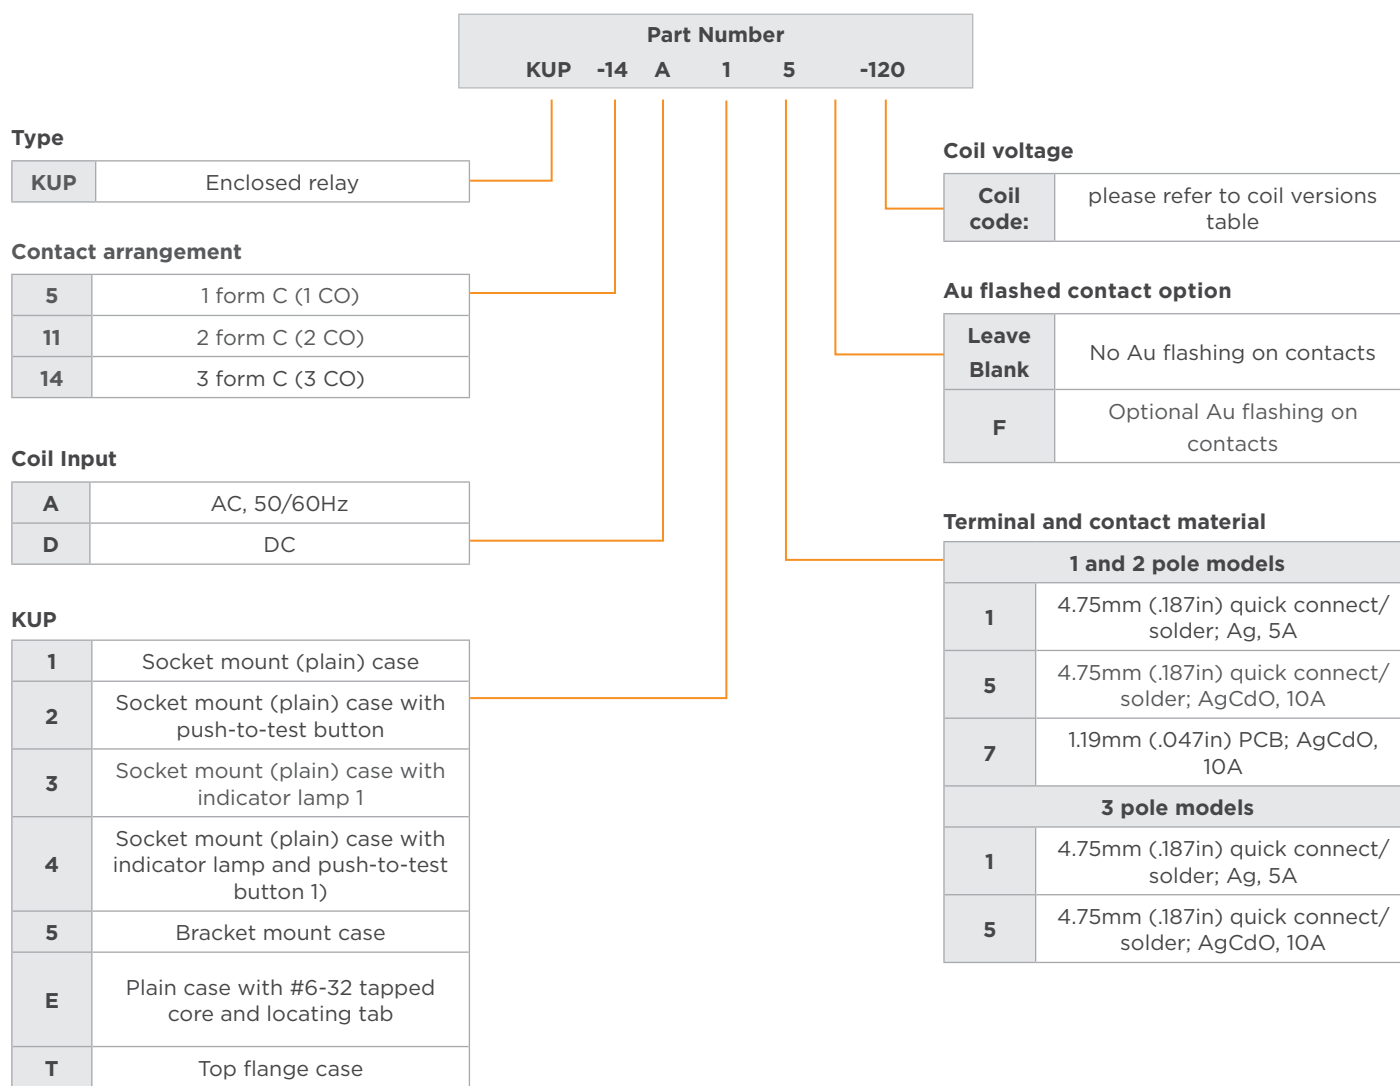

1) Indicator lamps are available on models with the following coils: 6-24VAC and VDC, 110VDC and 120-240VAC. Only models with 120-240VAC coils are UL recognized.

te.com

©2025 TE Connectivity Plc. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity Plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

03/25 ED