


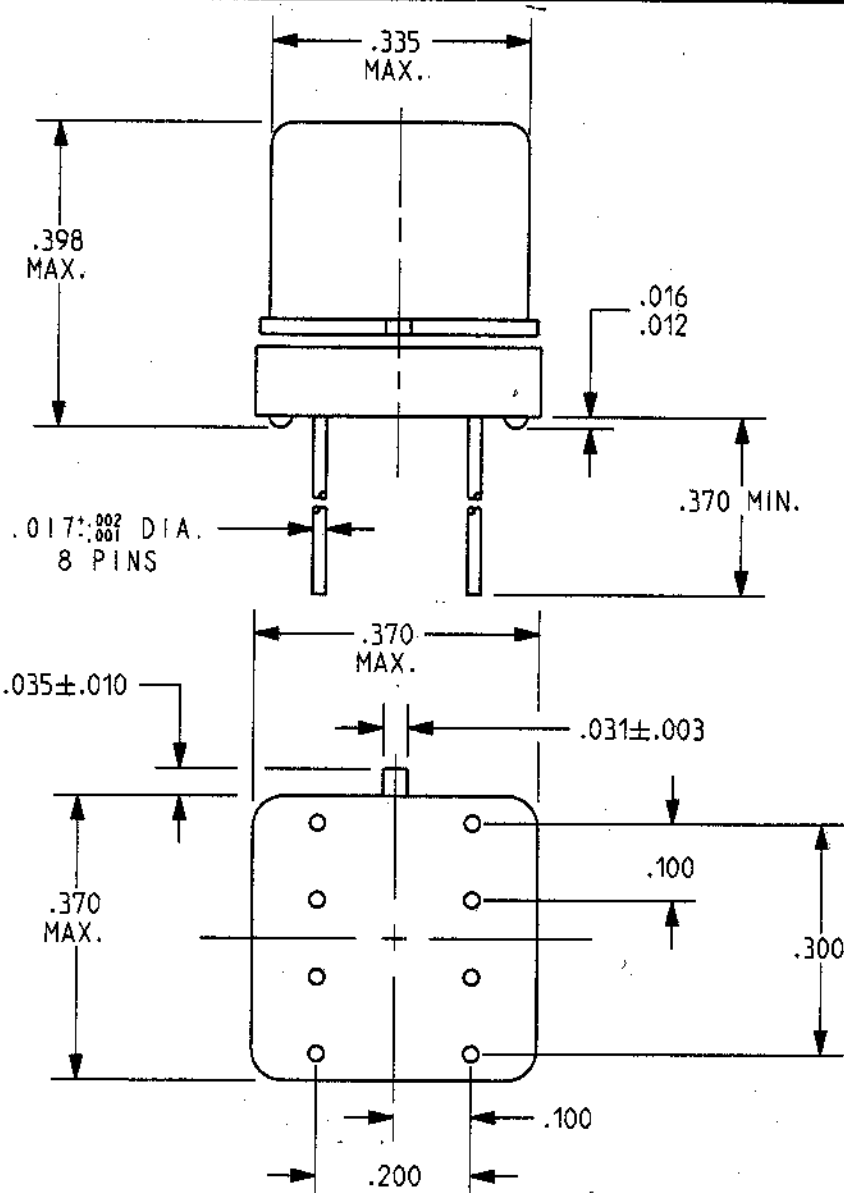


REV. 0
DCO 143643

COIL: @ 25°C
RESISTANCE 1560 OHMS $\pm$ 10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 17.0 VDC
MUST RELEASE

ENVIRONMENT:
VIBRATION 100 Hz TO 500 Hz @ 10 g's
SHOCK 30 g's 6 MS. DURATION
TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 3.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 3 SEPT 02 CK. 9/3/02

CII Technologies
advanced control electronic solutions

CUST. CII STD
CUST. NO. REV.

"HM" RELAY

HM1-26B