


Connection Products

Rail Mounted Terminal Blocks

Features and Benefits

- Conforms to all major international standards including UL, cUL, CSA, KEMA and LR
- Ex-e Certified
- Self extinguishing UL94V-0 material
- Polyamide material for use between -30°C to +110°C
- Full range of accessories available
- Current ratings up to 192 Amps (to IEC standards)
- TopHat/GRail
- Blue EXI version available on request

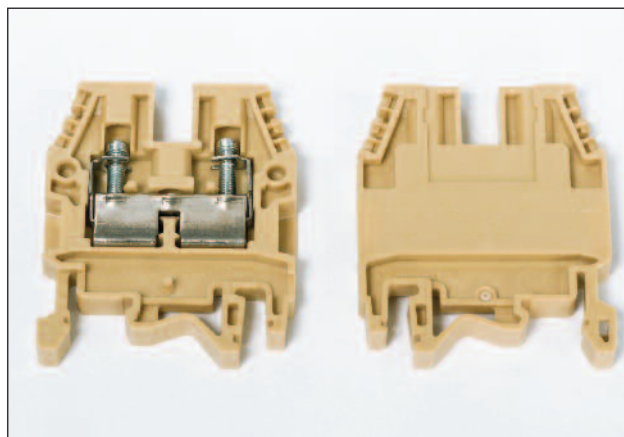

Terminal Block.

TYPE	Rated Wire(flexible)	Current Rating	Terminal Width	Pack Cont.
CBD.2	0.5-4mm ²	24A	5.5	10
CBD.4	0.5-6mm ²	32A	6.5	10
CBD.6	0.5-10mm ²	41A	8	10
CBD.10	0.5-16mm ²	57A	10	10
CBD.16	0.5-25mm ²	76A	12	5
CBD.35	0.5-35mm ²	101A	16	5
CBD.50	1.5-50mm ²	125A	18	5
CBD.70	1.5-95mm ²	192A	20.5	5

TYPE	Description	Pack Cont.
CB.2/PT	End Section For CBD.2	10
CB.4/6/PT	End Section For CBD.4&CBD.6	10
CB.10/PT	End Section For CBD.10	10
CB.16/PT	End Section For CBD.16	5
CB.35/PT	End Section For CBD.35	5
CB.50/PT	End Section For CBD.50	5
CB.70/PT	End Section For CBD.70	5