

# BI72G-Series

## 72W POWER SUPPLY

The BI family of AC/DC switch mode power supplies offers the best mix of cost efficiency and European quality standard. The standardized product is available in a variety of housings, secondary cables / plugs and options of customization.




### Features

- Ultra low standby losses
- High Efficiency
- Protection class II
- Wide selection of output plugs
- Manufacturing according to ISO 9001
- Short circuit proof

### Options

- Customized product marking
- Different secondary cables / plugs available
- Housing modifications possible
- Additional primary inlets available

Specification		
Output Power	72	W
Output Voltage	12 or 24	V
Output current	5	A
Universal input voltage	90 - 264	V
Operating temperature	0 - 40	°C
Efficiency	typ. 90	%
Standby Power	typ. 90	mW
Efficiency level	VI	
Insulation of output	SELV	
Leakage current	≤ 250	μA

Housing versions	
Desktop IEC 60320	
 C8 Inlet	
Secondary Connection	
Cable/Plug	-

Test standards	
EN 55032 EN 55035 EN 61000-3-2 EN 61000-3-3 FCC Part15 Subpart B	General EMC standards
EN 62368-1	Information technology equipment
UL1310	Class 2 Power Units


Approvals			
			



Parameter	Symbol	Min	Typ.	Max	Unit	Test Cond.
Specifications are subject to change without any notice.						
Input Voltage	$U_{IN}$	90		264	$V_{AC}$	
	Operation above the specified maximum input voltage may cause damage. Below the minimum input voltage the unit does not meet the specification.					
Input Current	$I_{IN}$			1800	mA	
Input Frequency	$f_{IN}$	47	50	63	Hz	
Efficiency	$\eta$		90		%	at full load
Stand-by power	$P_{stb}$		90	210	mW	without load
International efficiency mark		VI				
Output Power	$P_{out}$			72	W	
Output Voltage	$U_{out}$	12		24	$V_{DC}$	
Output voltage tolerance	$\Delta U_{out PCB}$			5	%	at PCB
Ripple Voltage	$U_{rms}$			200	mV <sub>rms</sub>	
Output Current	$I_{out}$			5	A	
Max. Overload current	$I_{out\ overload}$			200	% of $I_{out}$	
	Maximum 1 minute overload duration, followed by 15 minute cooldown period.					
Isolation	Galvanic isolation with safety extra low voltage (SELV) output					
Means of protection		SELV				
Dielectric Strength	Standard	3			kV <sub>AC</sub>	50Hz sinusoidal waveform
Leakage current	$I_{LK}$			250	$\mu A$	
Operating Temperature	$T_{OP}$	0		40	$^{\circ}C$	free convection
Thermal protection	A thermal shut down protects the power supply and the surroundings from hazardous temperatures. To reset the thermal protection unplug the unit and allow it to cool down.					
Storage Temperature	$T_{ST}$	-20	25	60	$^{\circ}C$	
Humidity				95	%	non condensing
Single component failure	A single component failure does not cause any damage to persons or ambient (fire, explosions, etc).					
Disconnecting device	Desktop	The appliance inlet is considered as disconnecting device. Make sure that the appliance inlet is accessible to the operator.				

Ordering information and part number example					
BI72G	-	<b>xxx</b>	<b>yyy</b>	-	<b>w</b>
		Voltage	Current		Input connection
		in Volt after dividing by 10	in Ampere after dividing by 100		IEC 60320 C8 Inlet


Reliability		
MTBF	60.000 h	at 25°C ambient
Maintainability	The power supply is not to be repaired	

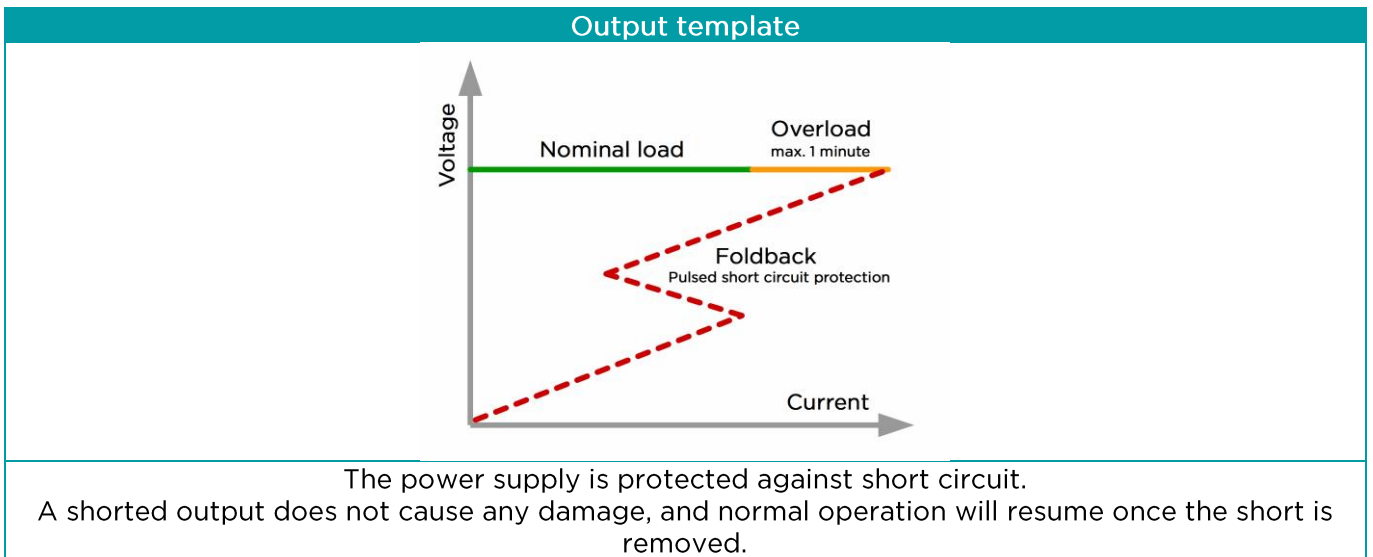

Marking	Marking plate symbol explanation	
Product name Input parameters Output parameters Safety instructions Date code of production CE marking Approval marks		Conformity with the relevant EU directives.
		NRTL Canada / USA Mark issued by Intertek
		Certification Mark, indicating that the product meets the German product safety law.
		FCC EMC mark
	RoHS conform 	The power supply has to be disposed appropriately according the local regulations for Waste Electrical and Electronic Equipment.
		For indoor use only.
		Class II
		Energy Efficiency Level VI

Certification overview	
Housing	Information Technology
Desktop C8 Inlet	

## Desktop IEC 60320 C8 Inlet

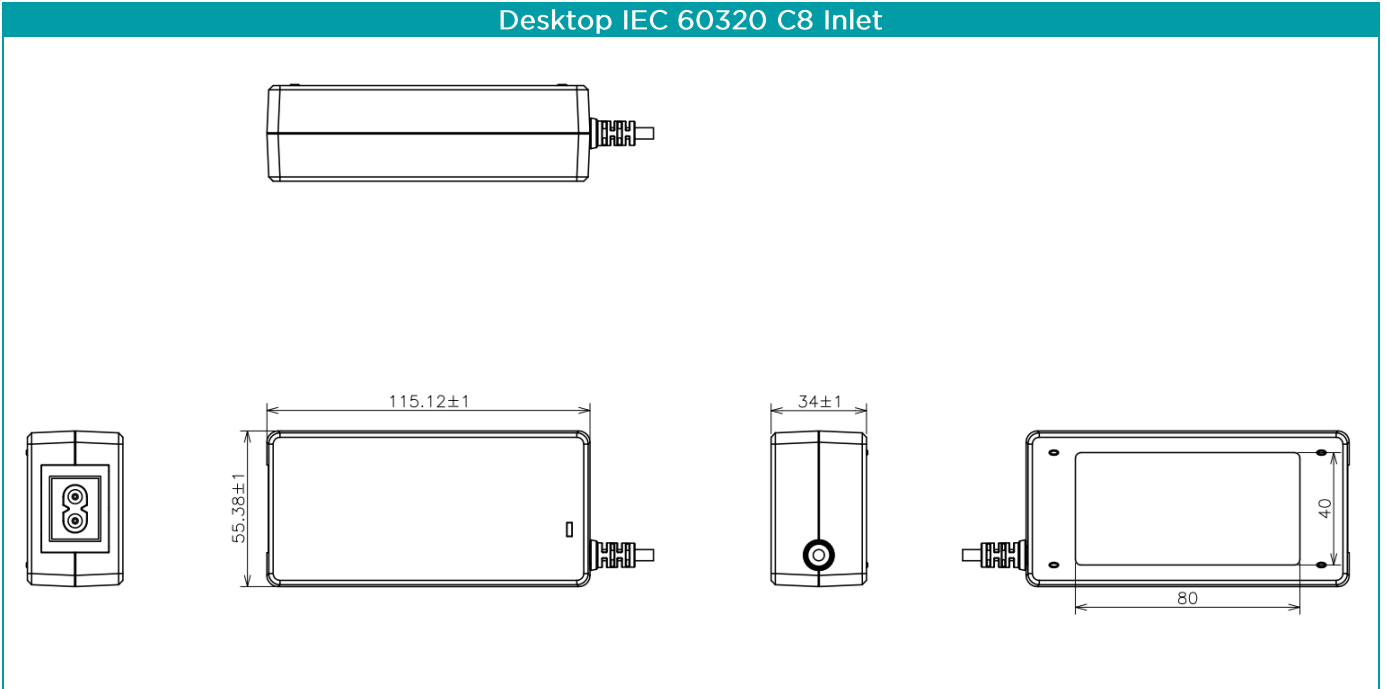

## Packaging and weight

Information on request - depending on configuration of power supply and primary adapters

## Energy Efficiency

This power supply family fulfills Directive 2009/125/EC with Commission Regulation (EU) 2019/1782. The vales “Average active efficiency”, “Efficiency at low load” and “No-load power consumption” are typical measured values, measured at one representative sample at an input voltage of 230VAC.

Input specification		
Input Voltage	100-240	VAC
Input Frequency	50-60	Hz

Output specification			
Output voltage	12	24	VDC
Output current	5	3	A
Output power	60	72	W
Average active efficiency (100%/75%/50%/25%)	88,9	91,7	%
Efficiency at low load (10 %)	91,21	89,31	%
No-load power consumption	90	100	mW

Revision	Date	Author	Change
A	22.09.2022	Mauritz	First edition

## CONFIDENTIAL

This document contains proprietary information originated and/or owned by EGSTON System Electronics Eggenburg GmbH. This information shall not be duplicated, used or disclosed in whole, or in part, to any other party or used for any other purpose without the prior consent of EGSTON System Electronics Eggenburg GmbH.

Copyright © 2022 EGSTON System Electronics Eggenburg GmbH, A-3730 Eggenburg, Grafenberger Straße 37  
All Rights Reserved.