



# TAOGLAS®



# Datasheet

**Part No:**  
GW.05.0153L

**Description:**

Dual-Band Wi-Fi 2.4~2.5GHz/5.15~5.85/7.125GHz  
Blue Terminal Mount Monopole Wi-Fi 6 Antenna

**Features:**

High Efficiency – with and without ground plane  
Full Wi-Fi Band Coverage - 2.4 / 5.8 / 7.125GHz  
Covers all Wi-Fi 6 frequencies from 5.9 – 7.125GHz  
Extremely Compact - Ø10 x 62.3mm when straight  
Full 360 degrees rotation combined with 180 degree hinge articulation  
Max Peak Gain compliant with most Wi-Fi modules  
Connector: RP-SMA(M)  
Dimensions: 62.3\*Ø10mm  
CE Certified  
RoHS & Reach Compliant



1. Introduction	3
2. Specifications	5
3. Antenna Characteristics	7
4. Radiation Patterns	22
5. Mechanical Drawing	26
6. Installation	27
7. Packaging	28
<hr/>	
Changelog	29

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA  
ISO 9001:2015  
Certified



Taiwan  
ISO 9001:2015  
Certified



# 1. Introduction



The Taoglas GW.05 Wi-Fi 6 Hinged Rotatable Antenna is a high efficiency monopole antenna with the capacity to cover all Wi-Fi frequencies including Wi-Fi 6 up to 7.125GHz. Compared to other much larger antennas on the market, it has superior wide-band high efficiency characteristics.

The GW.05, as all monopole antennas, works best connected directly to the ground-plane of the device main PCB or to the outside of a metal housing. However, it still has very good performance (>50%) even without connecting to a ground-plane, making it one of the best all round small Wi-Fi terminal antenna on the market today.

In the un-grounded installation condition, it also comes below the max peak gain requirements for most Wi-Fi modules which are usually 2dBi, so it can comply with FCC regulations. The GW.05 is perfect for all Wi-Fi, WLAN, Zigbee, Bluetooth, and 802.11a/b/g/n/ac applications.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain because of GND plane, surrounding components, and device housing. If you want to be sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

It is better not to select an embedded antenna with very low free-space peak gain (<2dBi) directly, as this antenna would have worse performance in your device, and lead to compromised performance compared to using a Taoglas antenna.

The GW.05 is available in a unique Taoglas in green (GW.05.0153), white (GW.0153W) and also black with FAKRA Connectors to suit today's high-performance routers and modems. GW.05.AE23 comes with a FAKRA Code I Beige connector and GW.05.OZZ23, a Water Blue Code Z connector to ensure all applications are covered.

For more information on the GW.05 series or for integration information, please reach out to your local Taoglas customer services team or visit [Taoglas.com](http://Taoglas.com).

## 2. Specifications


Free Space Electrical									
Band	Frequency (MHz)	Setup	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	Straight	76.7	-1.2	2.8	50Ω	10W	Linear	Omnidirectional
		90° Bent	75.9	-1.2	2.7				
5.8GHz Wi-Fi	5150~5850	Straight	87.5	-0.6	3.6				
		90° Bent	82.1	-0.9	2.8				
7.1GHz Wi-Fi 6	5925~7125	Straight	75.8	-1.2	4.1				
		90° Bent	80	-1	3.4				
15x9cm Ground Plane Centre Electrical									
Band	Frequency (MHz)	Setup	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	Straight	55.5	-2.6	4.7	50Ω	10W	Linear	Omnidirectional
		90° Bent	41.6	-3.8	3.5				
5.8GHz Wi-Fi	5150~5850	Straight	51.5	-2.9	2				
		90° Bent	47.2	-3.3	1.3				
7.1GHz Wi-Fi 6	5925~7125	Straight	46.8	-3.3	2.6				
		90° Bent	46.3	-3.4	2.2				
30x30cm Ground Plane Centre Electrical									
Band	Frequency (MHz)	Setup	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	Straight	69.5	-1.6	3.9	50Ω	10W	Linear	Omnidirectional
		90° Bent	62.9	-2	3.6				
5.8GHz Wi-Fi	5150~5850	Straight	72.9	-1.4	6.4				
		90° Bent	75.8	-1.2	5.6				
7.1GHz Wi-Fi 6	5925~7125	Straight	68.9	-1.7	6.1				
		90° Bent	66.2	-1.8	5.2				


30x30cm Ground Plane Edge Electrical									
Band	Frequency (MHz)	Setup	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	Straight	48.4	-3.2	3.3	50Ω	2W	Linear	Omnidirectional
		90° Bent	41.5	-3.8	3				
5.8GHz Wi-Fi	5150~5850	Straight	38.4	-4.2	5.1				
		90° Bent	35.5	-4.5	5.2				
7.1GHz Wi-Fi 6	5925~7125	Straight	27	-5.7	4.4				
		90° Bent	25.7	-5.9	4.6				

Mechanical	
Antenna length	62.3mm
Antenna Diameter	10mm
Casing	POM
Connector	RP-SMA(M)
Weight	6g
Recommended Torque for Mounting	0.9N·m
Max Torque for Mounting	1.176N·m
Environmental	
Operation Temperature	-40°C ~ + 85°C
Storage Temperature	-40°C ~ + 85°C
Humidity	Non-condensing 65°C 95% RH


### 3. Antenna Characteristics


#### 3.1 Return Loss – Free Space

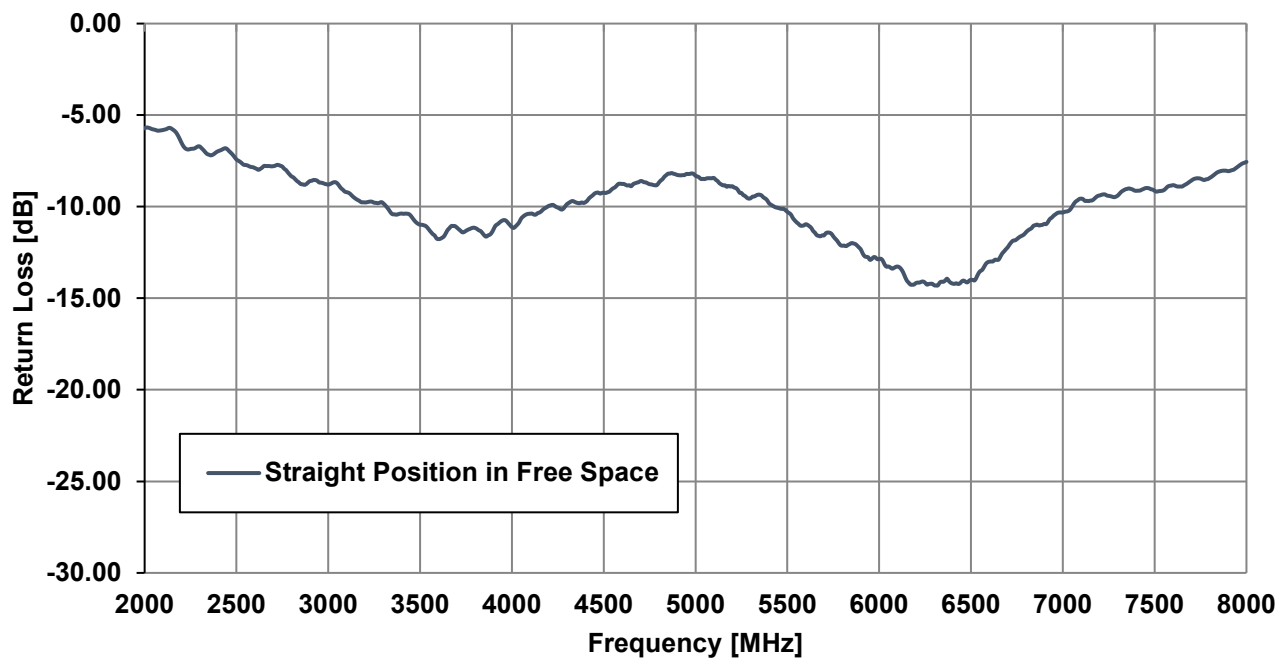

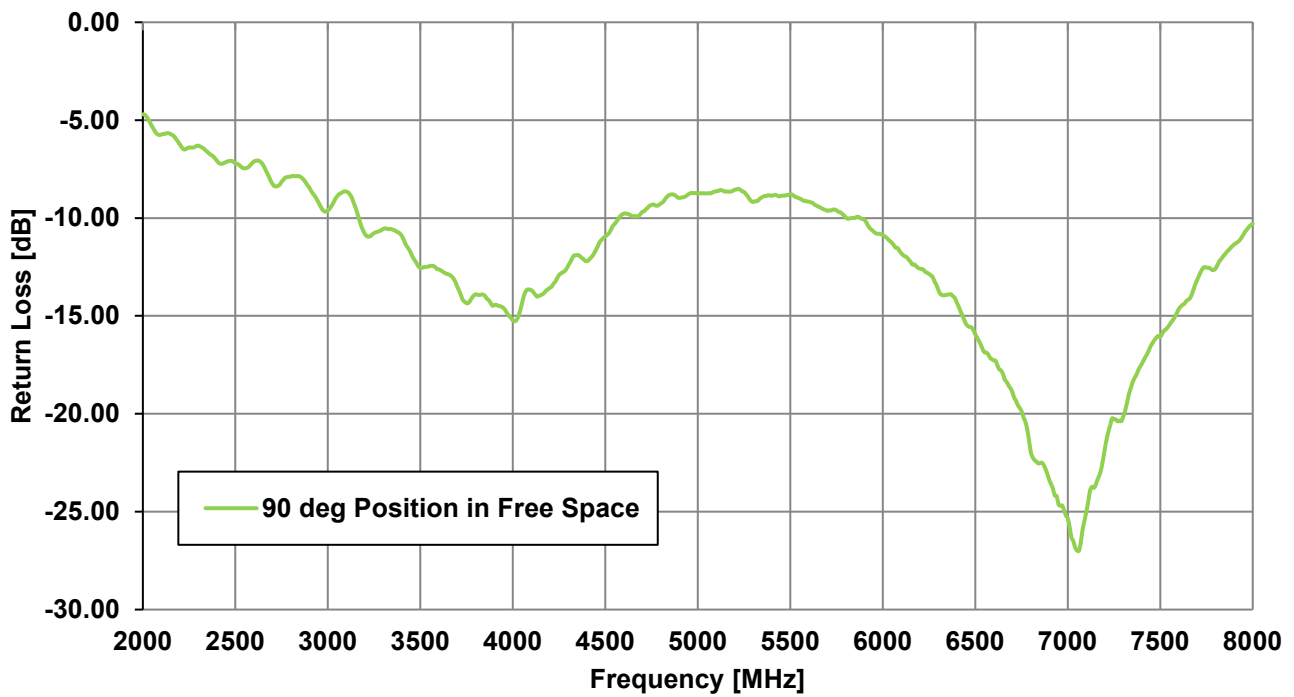



### 3.2 Efficiency – Free Space

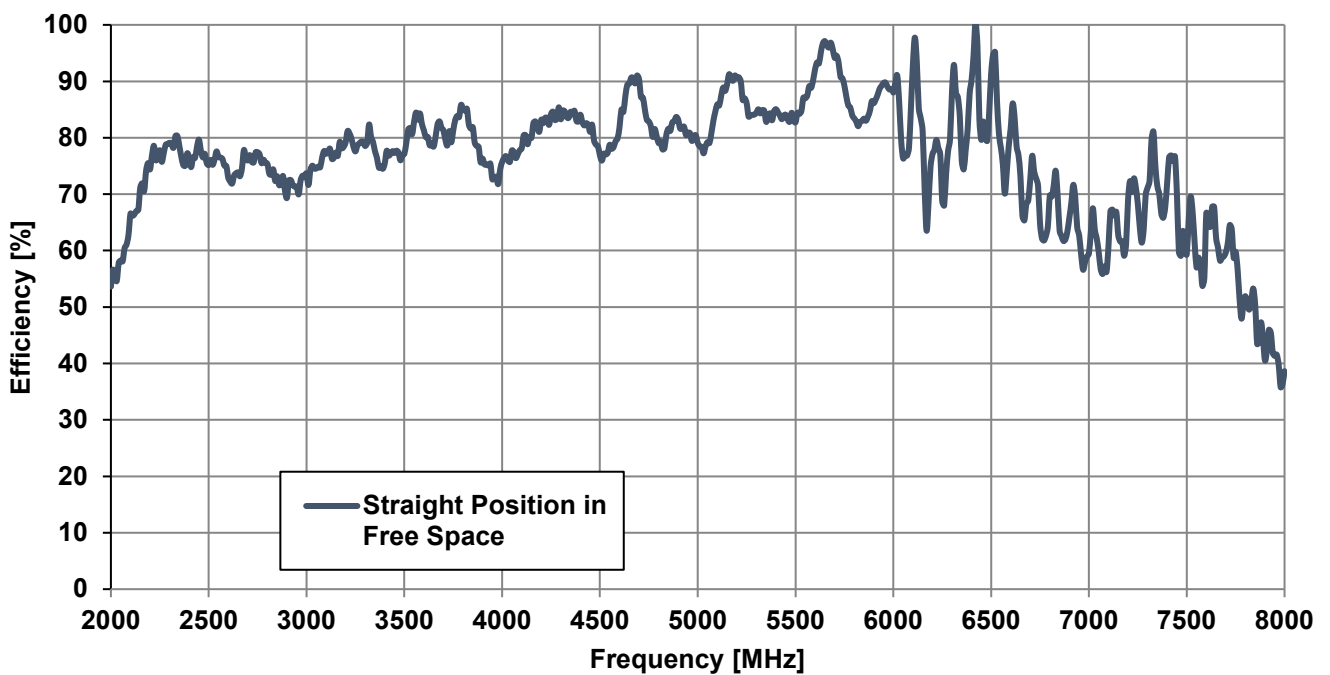

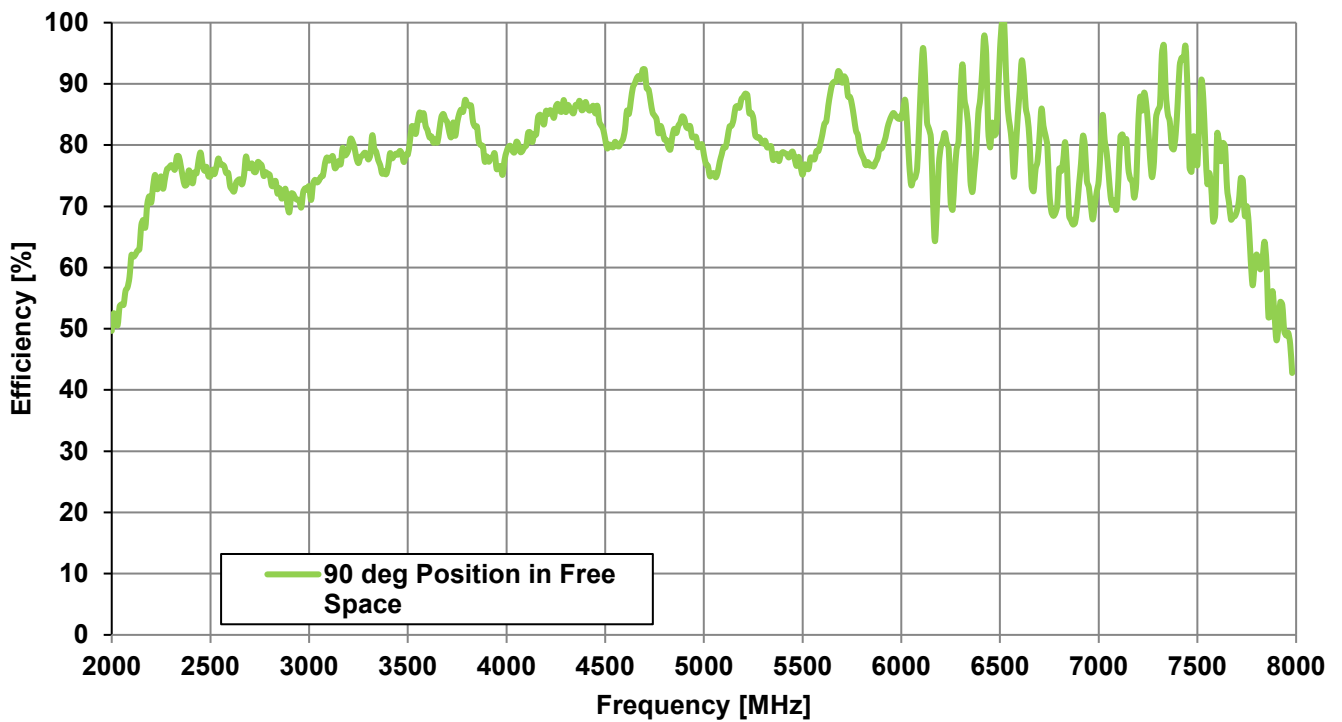



### 3.3 Peak Gain – Free Space

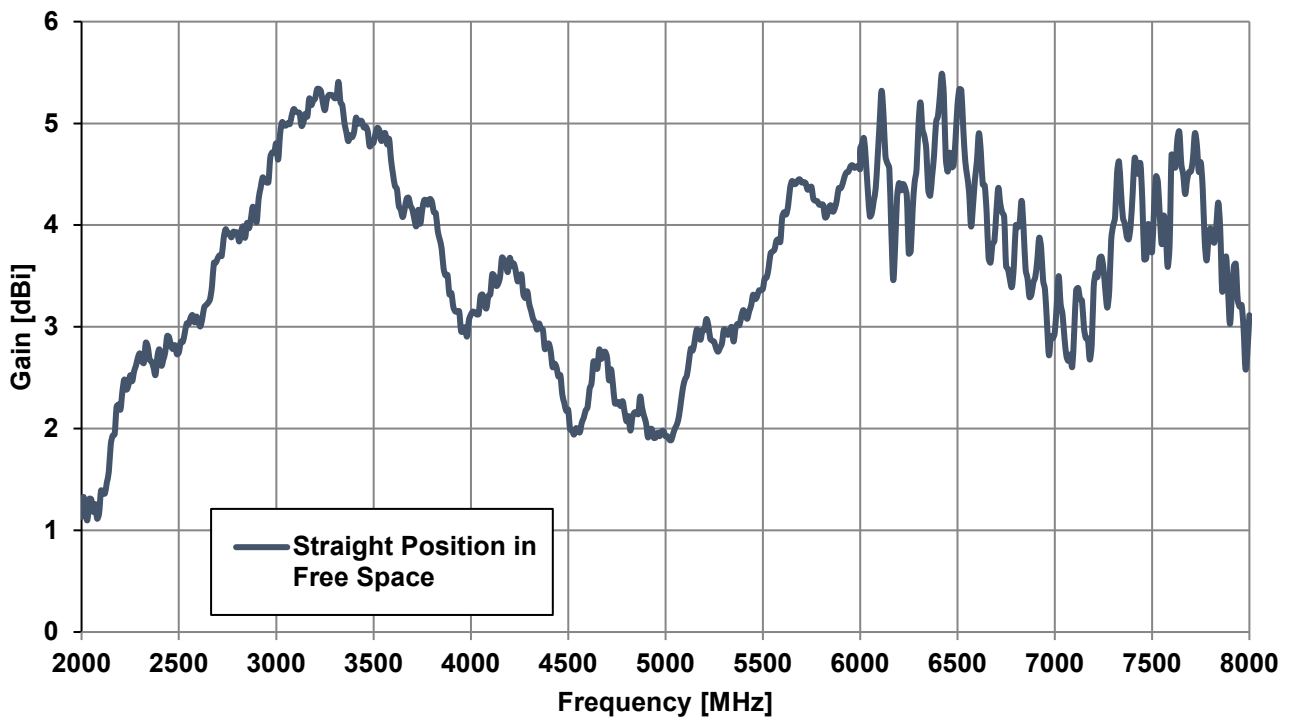

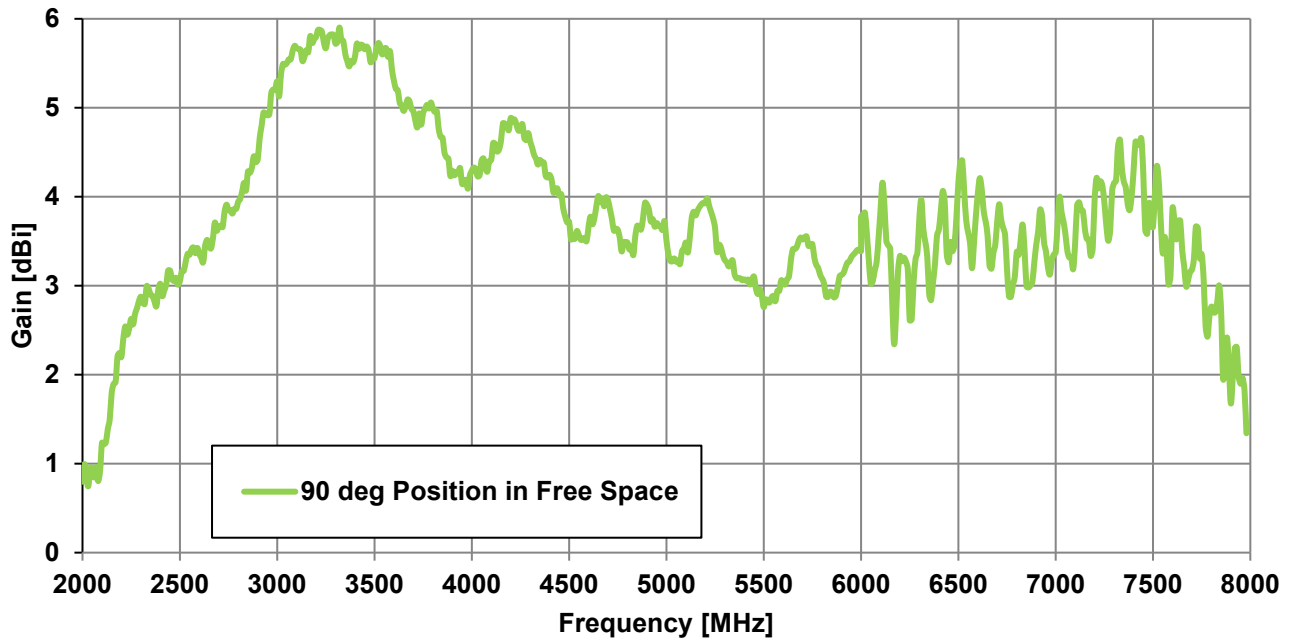



### 3.4 Average Gain – Free Space

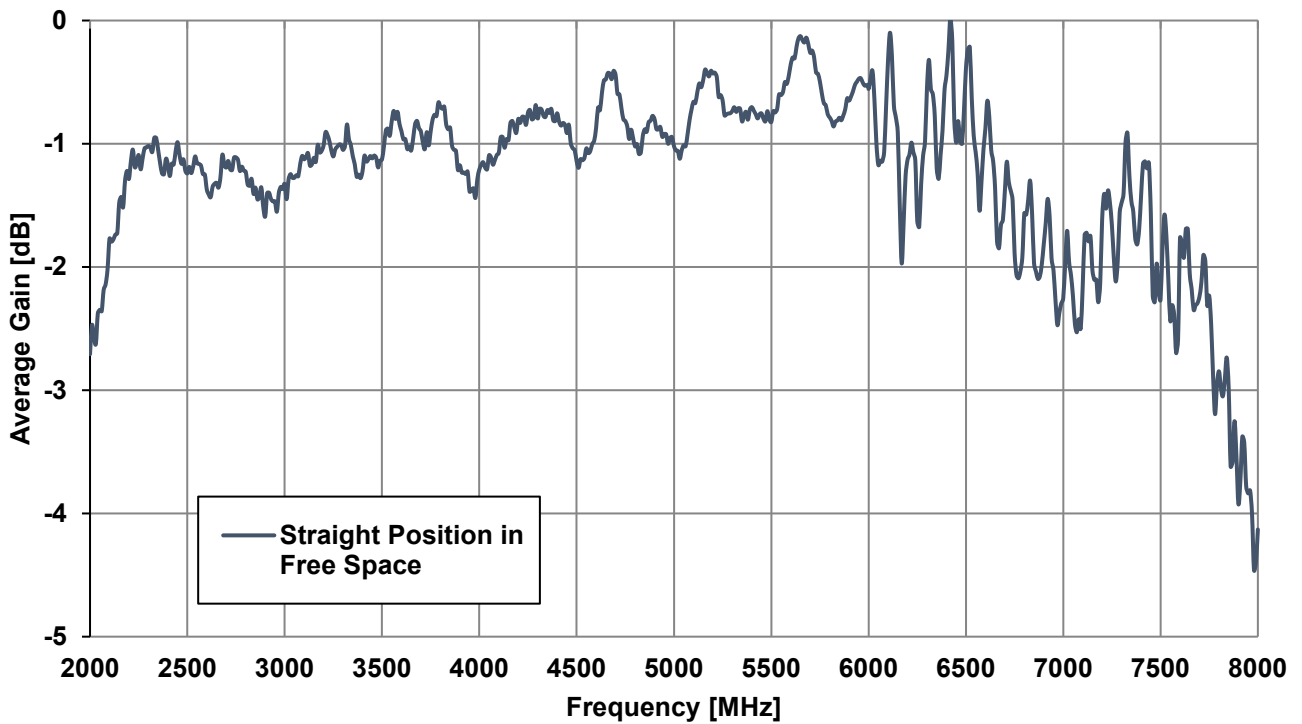

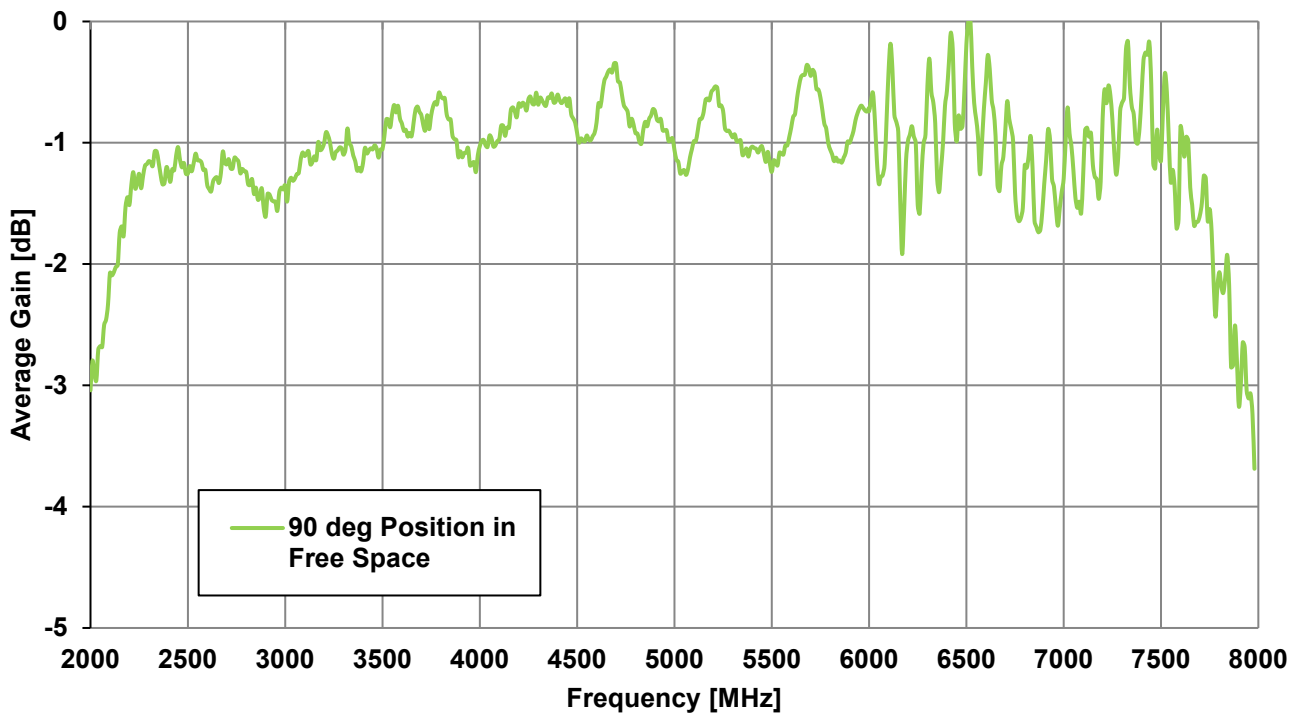



### 3.5 Efficiency – 30\*30cm Ground Plane

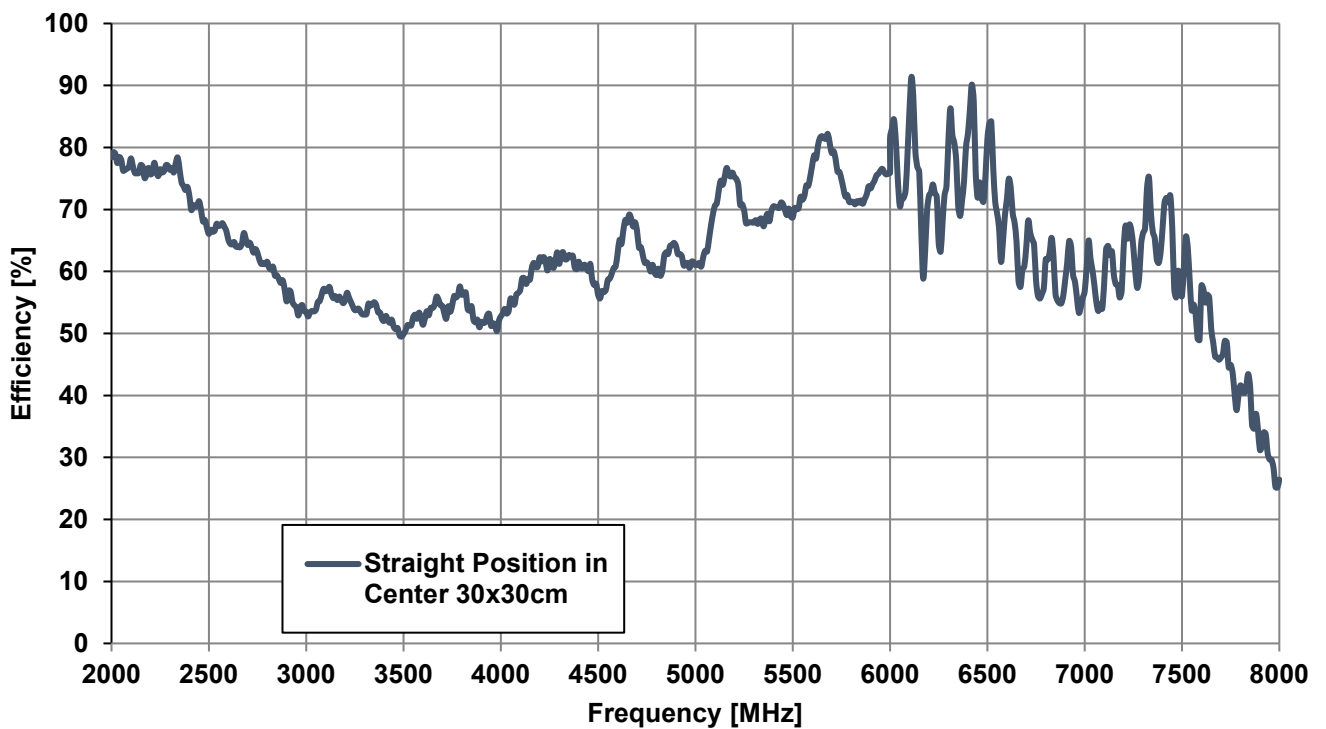

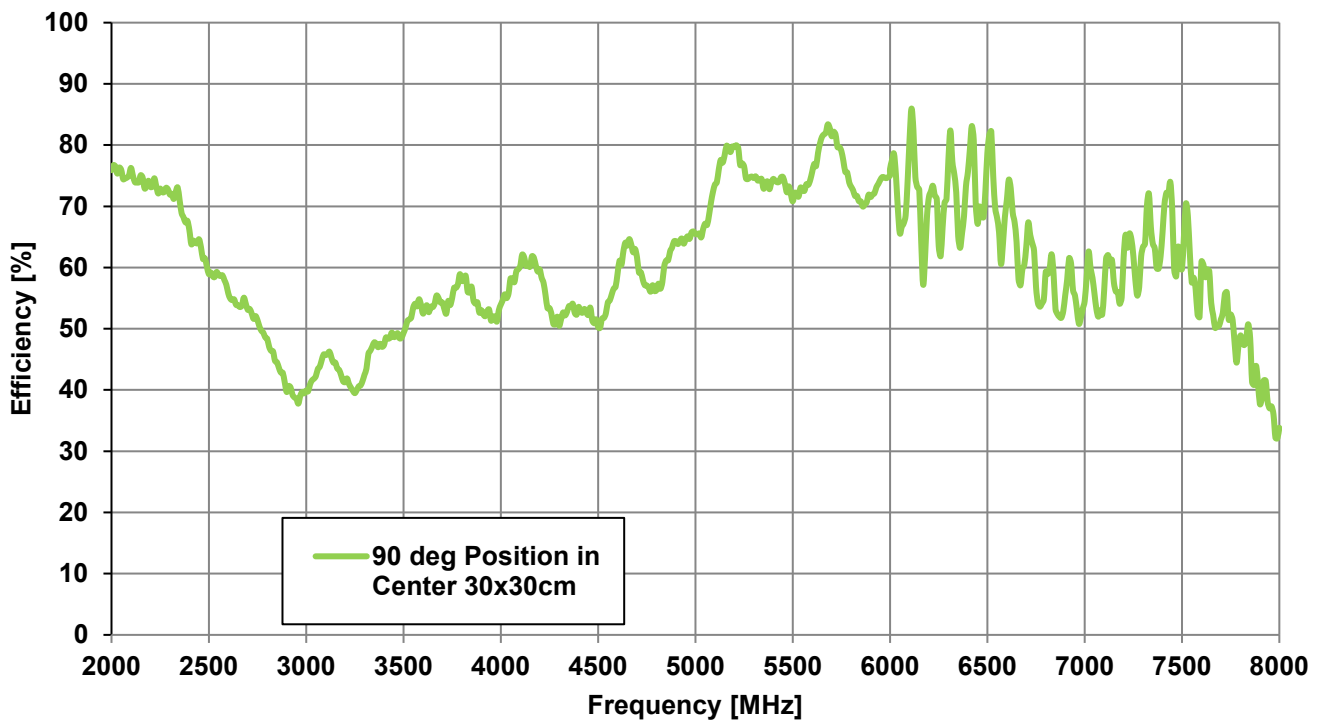



### 3.6 Peak Gain – 30\*30cm Ground Plane

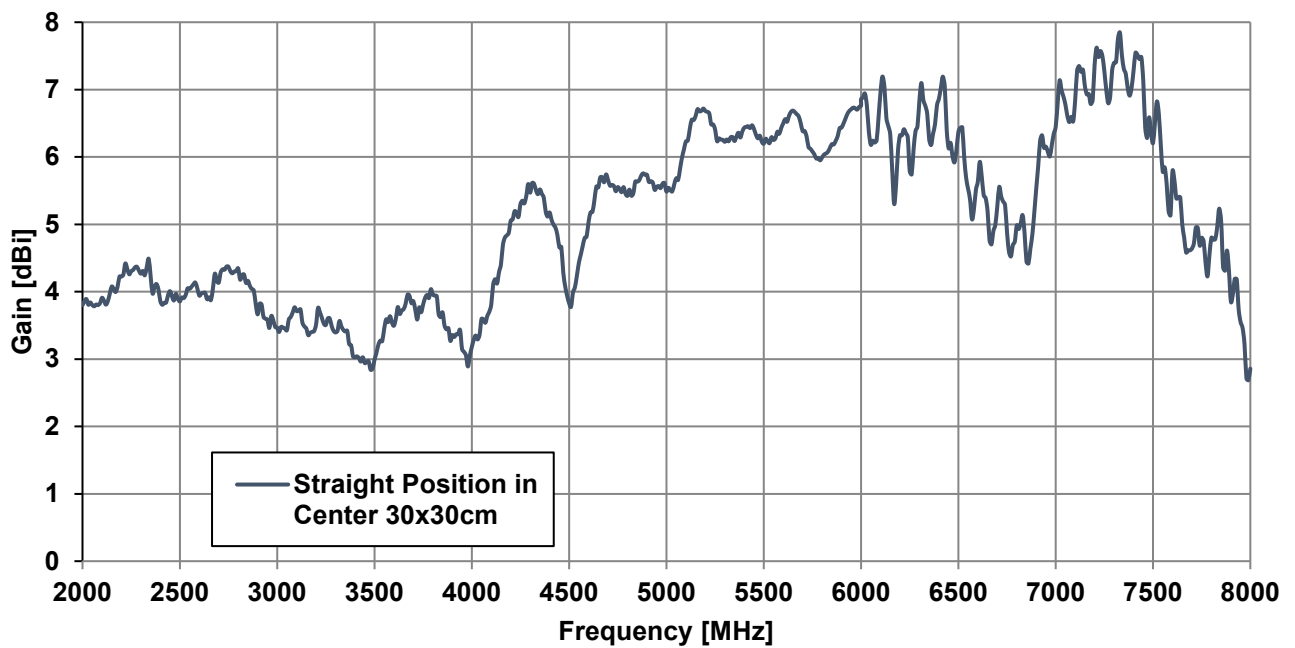

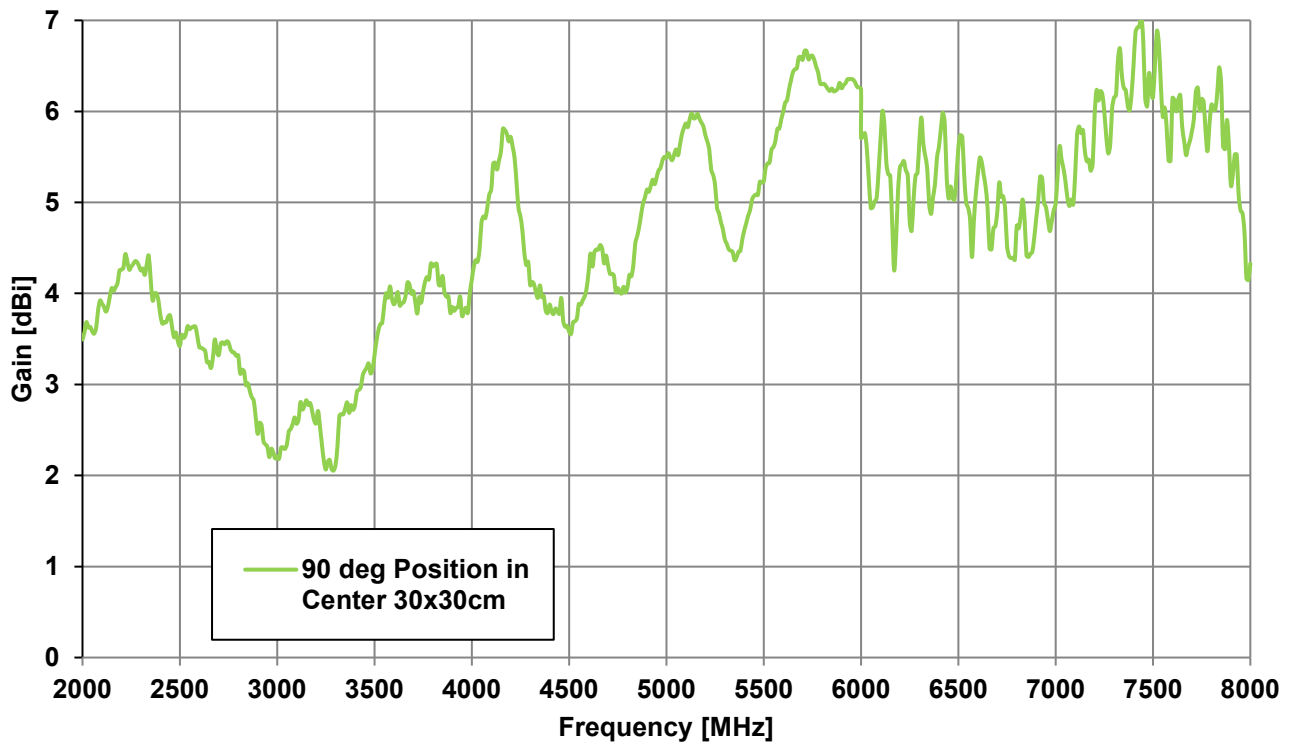



### 3.7 Average Gain – 30\*30cm Ground Plane

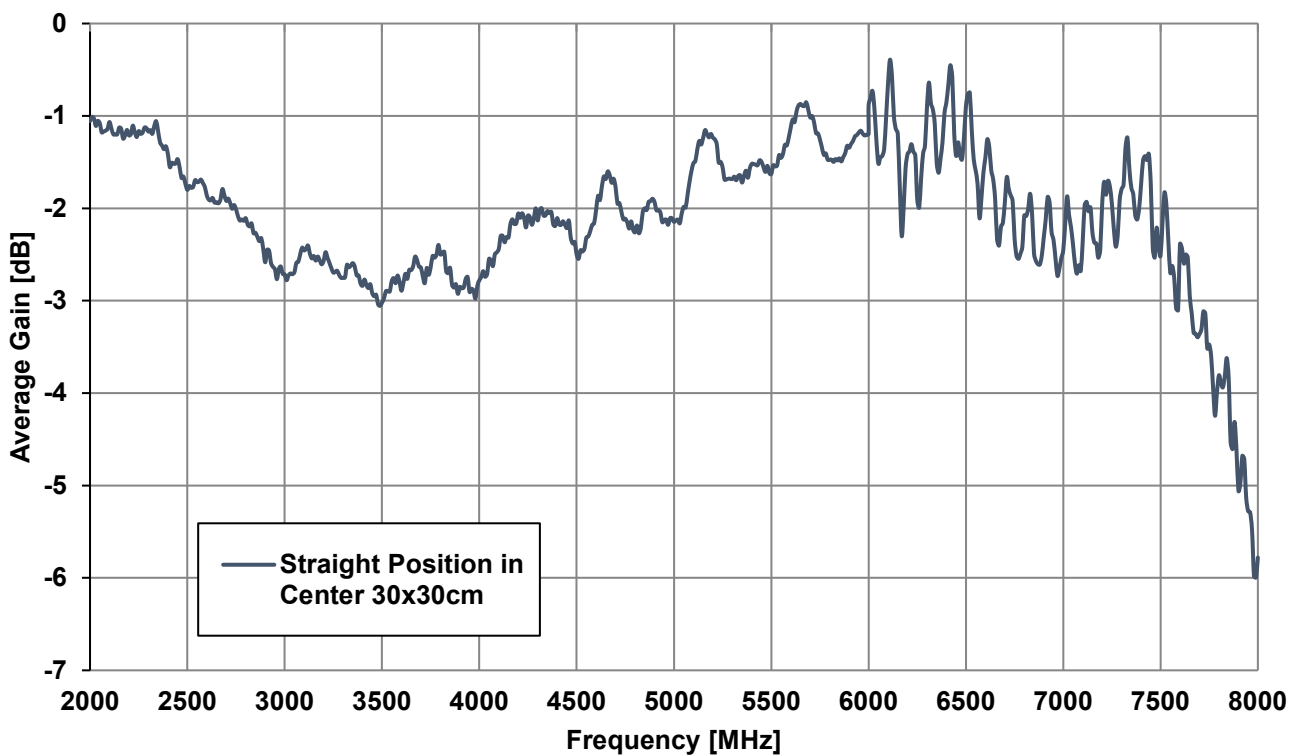

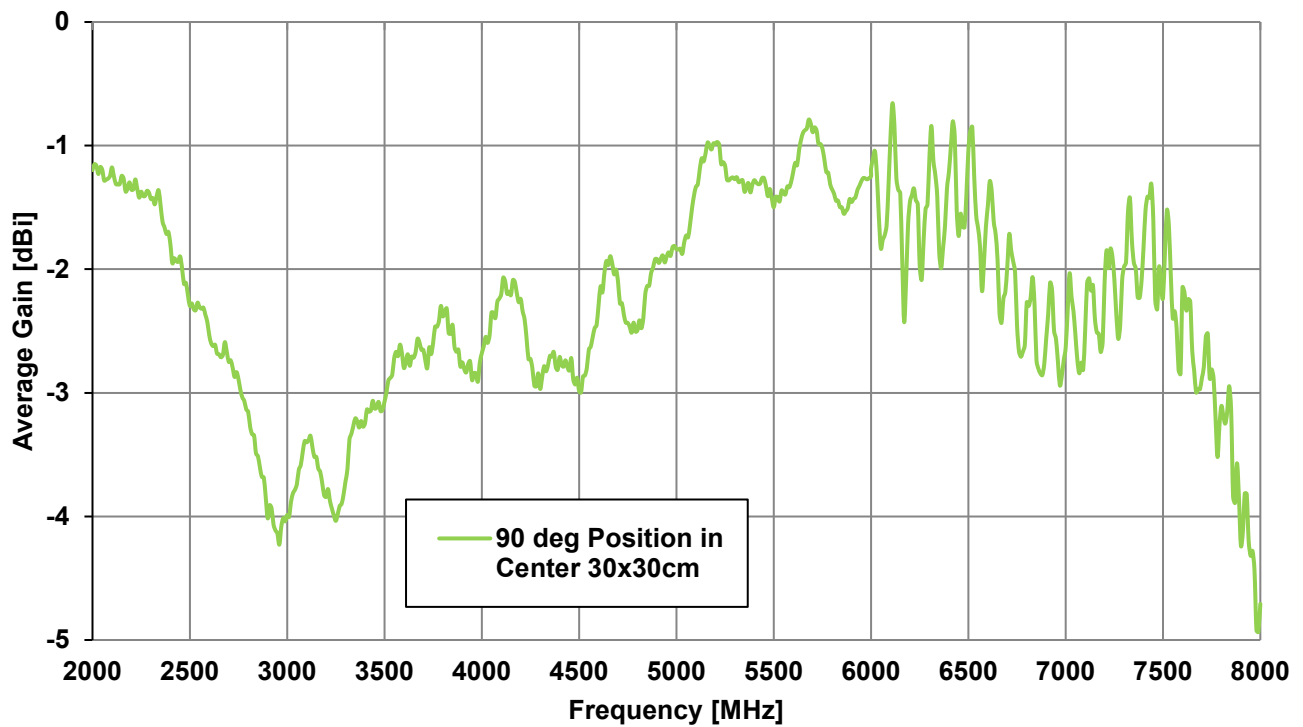



### 3.8 Return Loss – 30\*30cm Ground Plane Edge

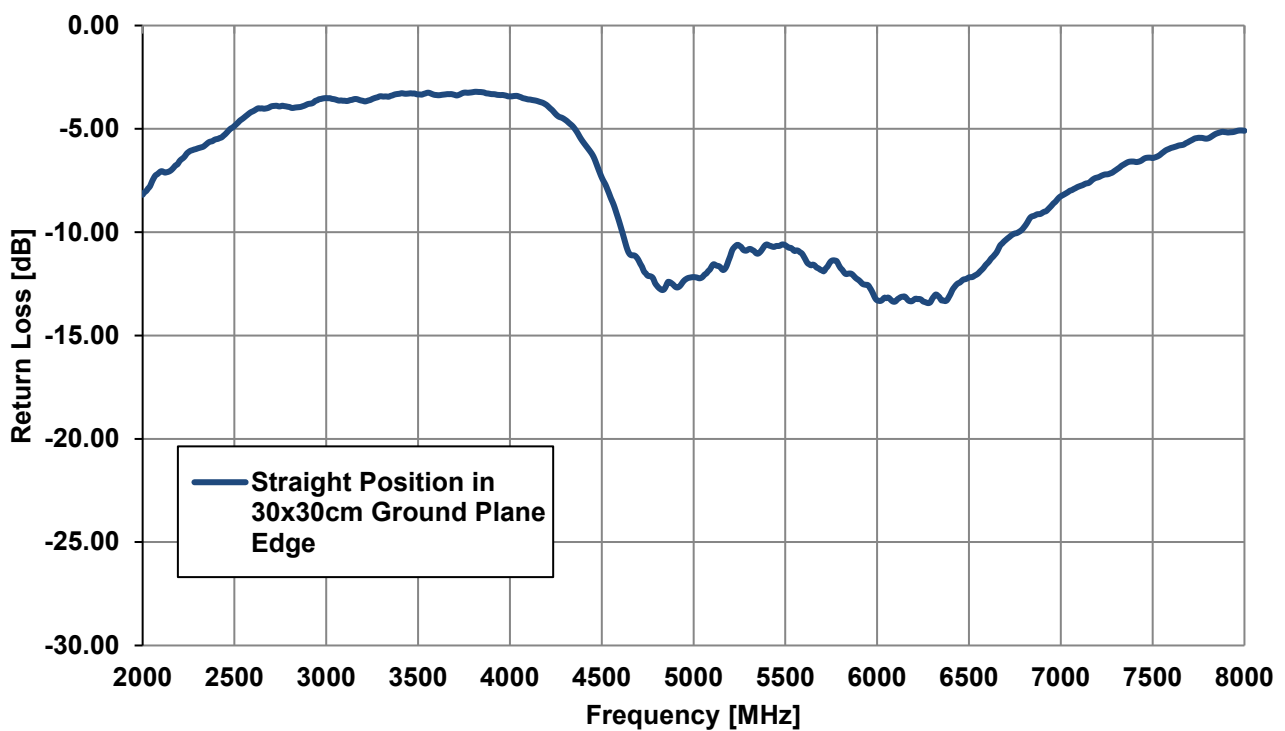

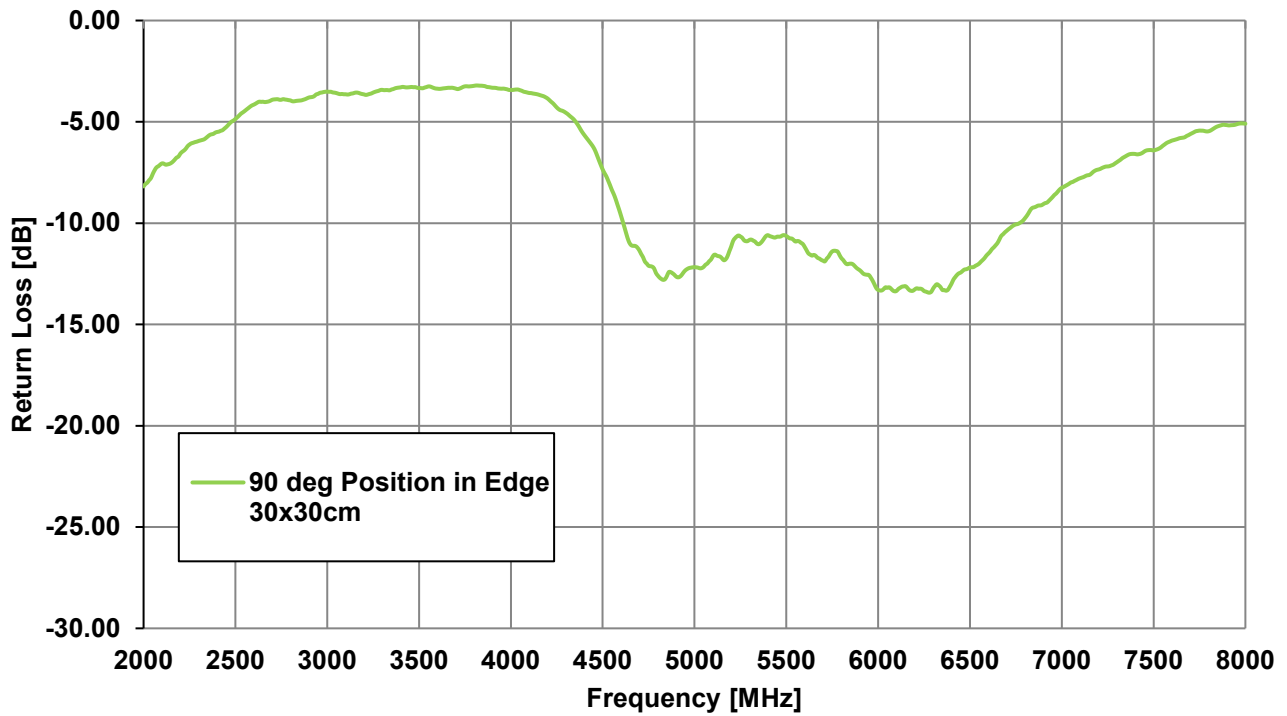



### 3.9 Efficiency – 30\*30cm Ground Plane Edge

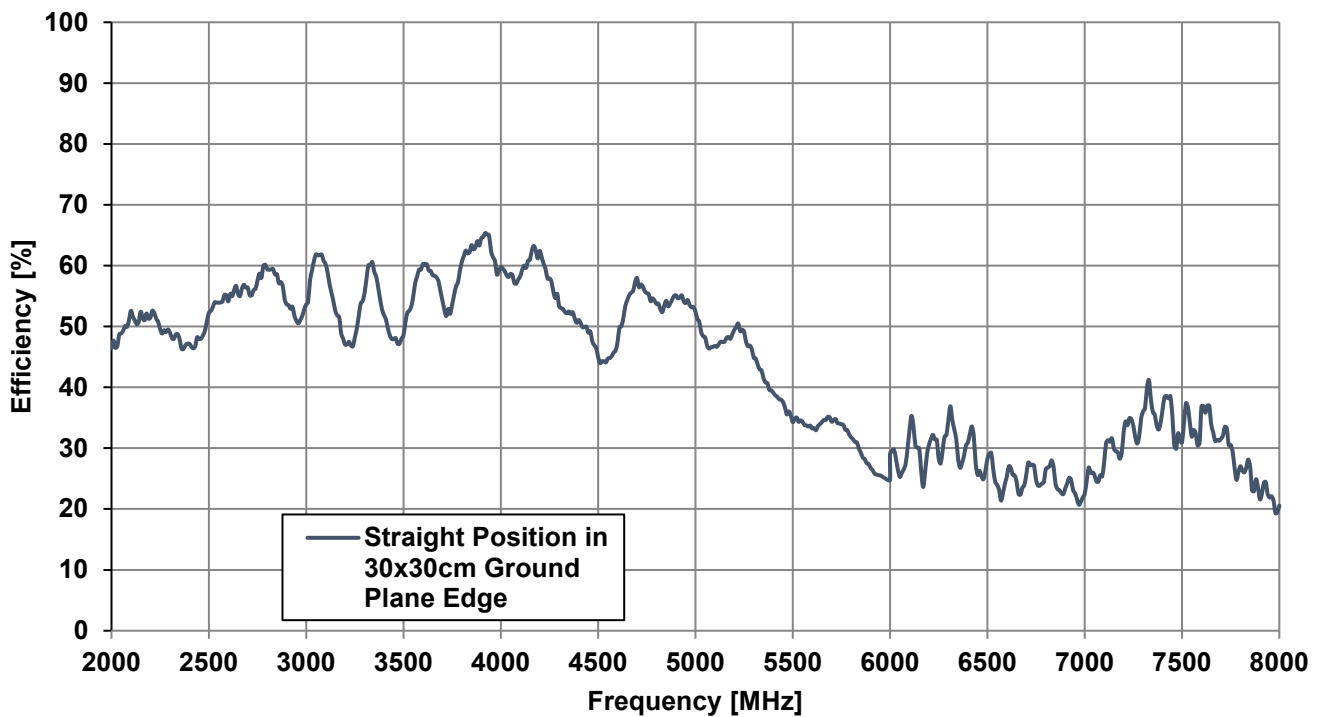

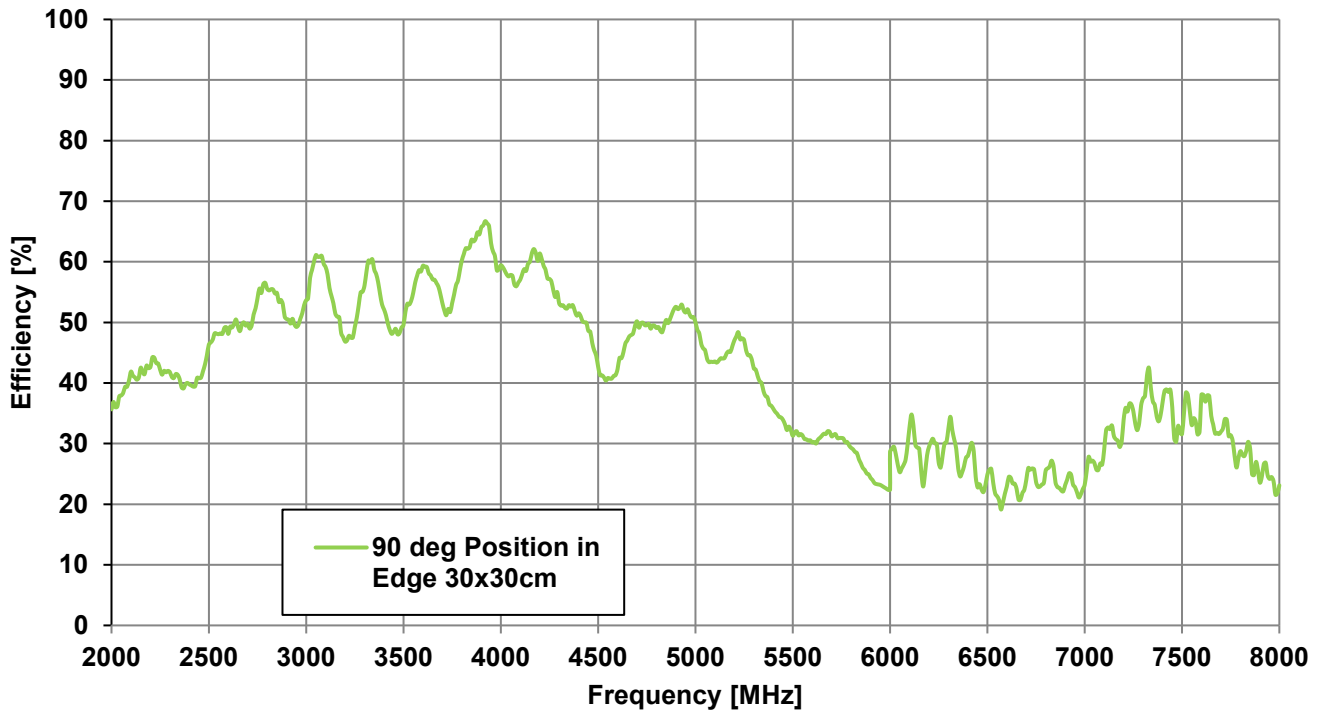



### 3.10 Peak Gain – 30\*30cm Ground Plane Edge

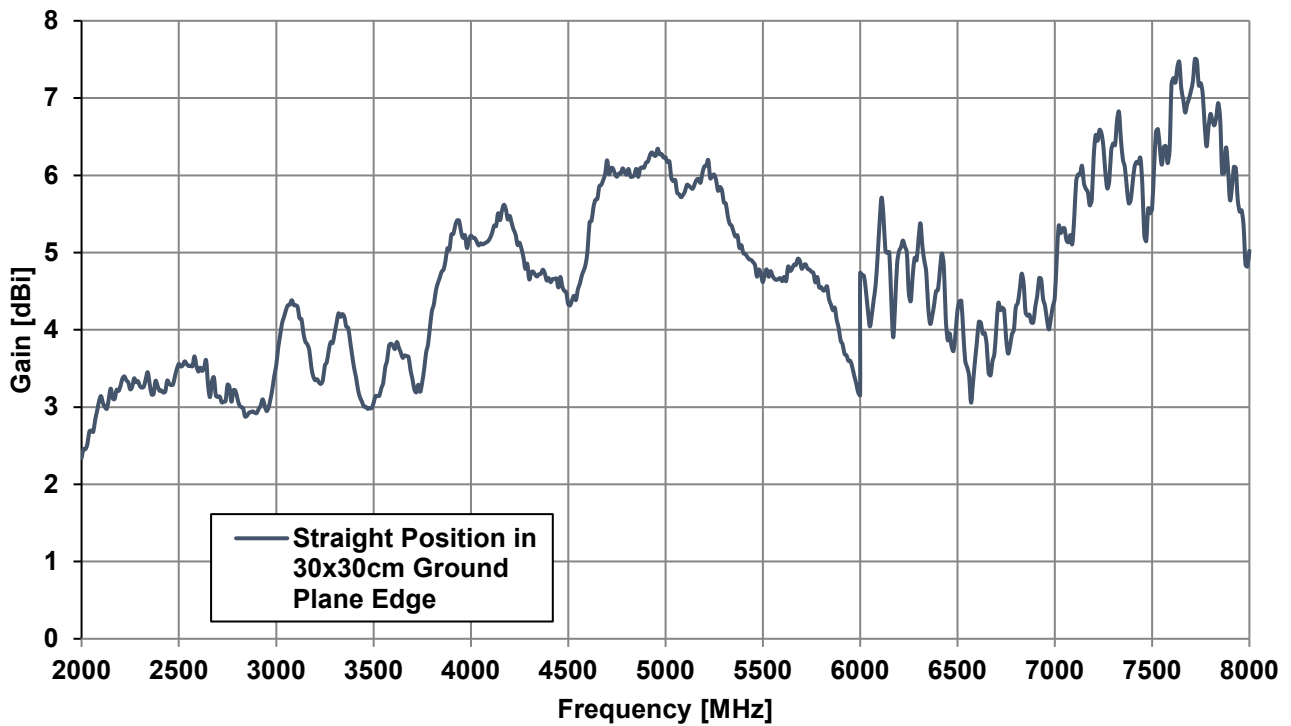

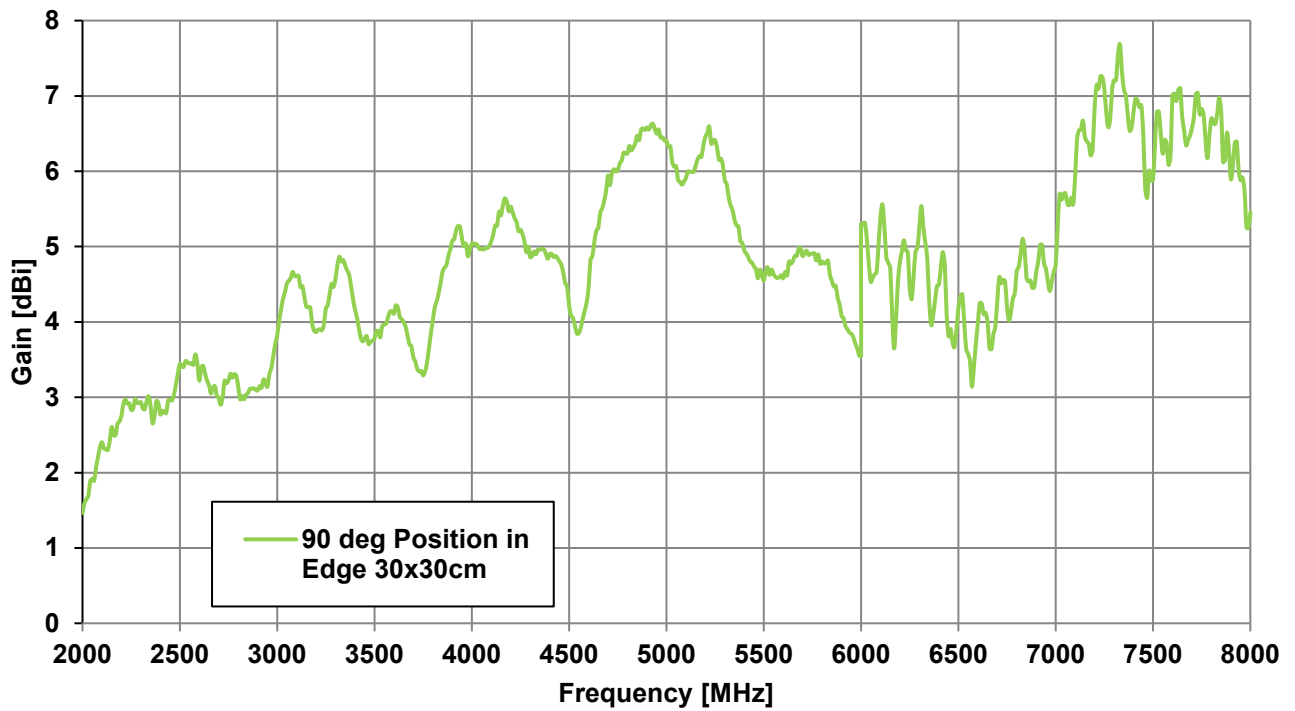



### 3.11 Average Gain – 30\*30cm Ground Plane Edge

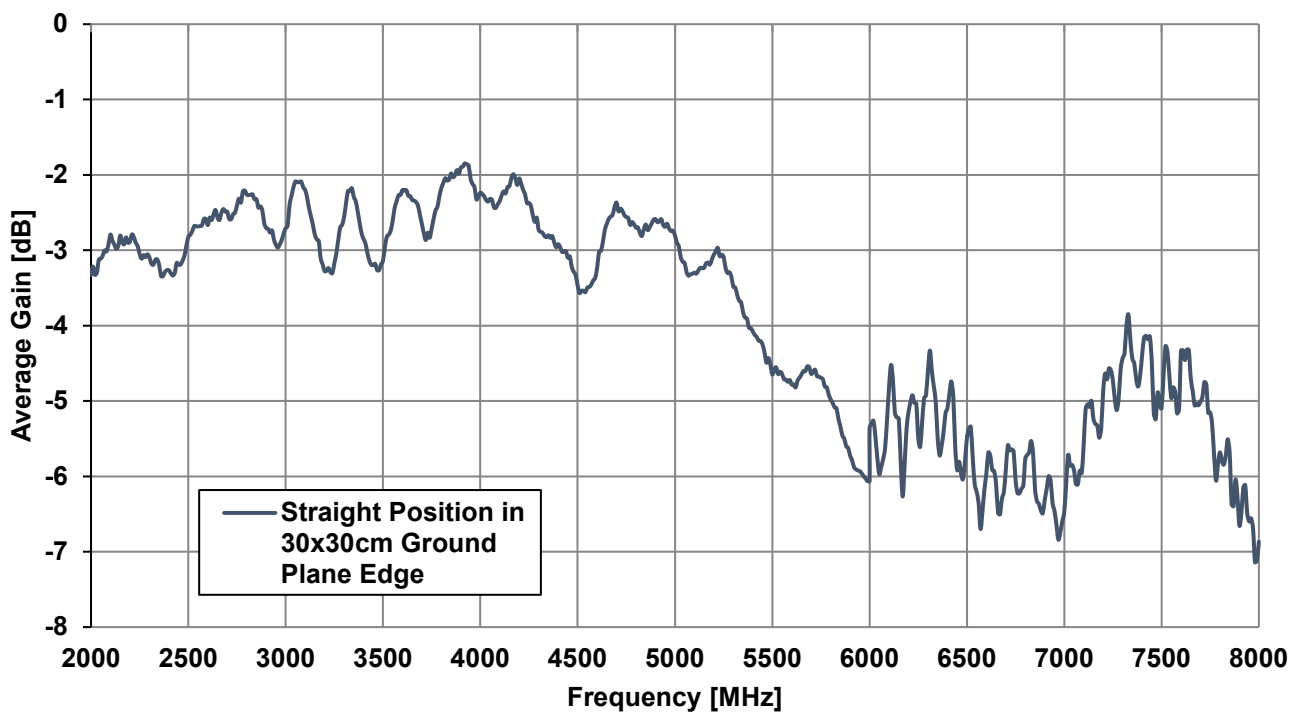

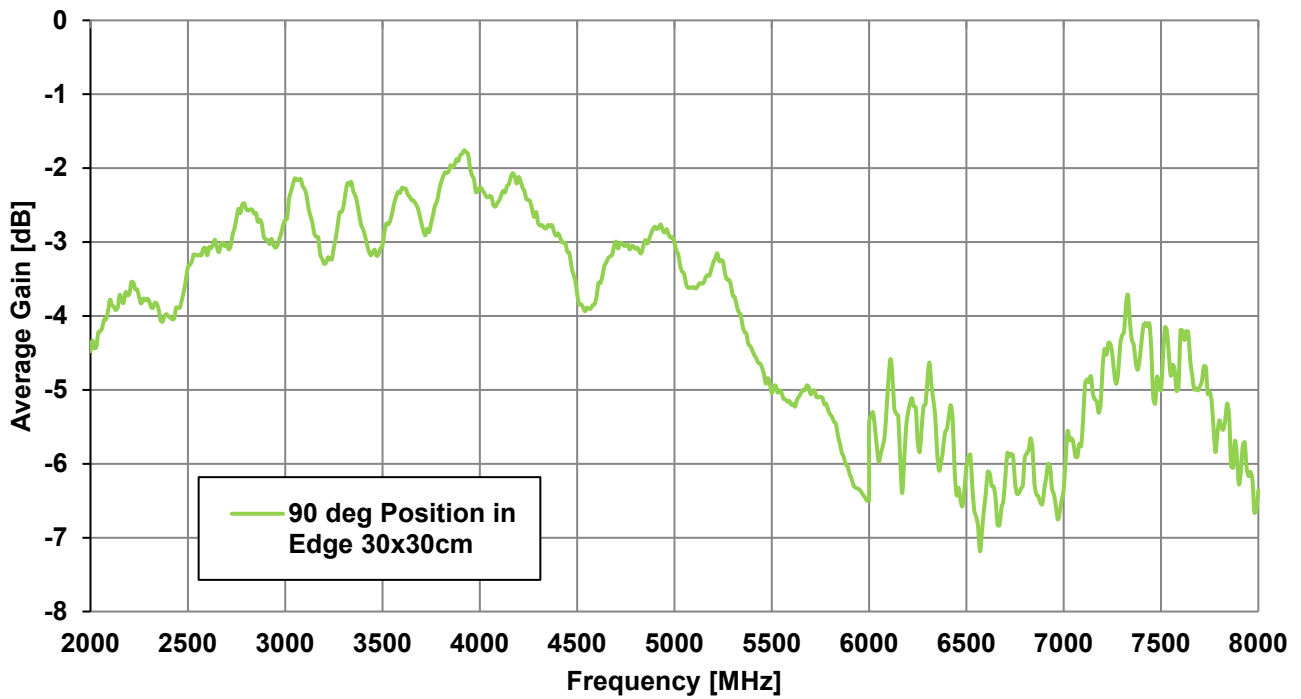



### 3.12 Return Loss – 15\*9cm Ground Plane

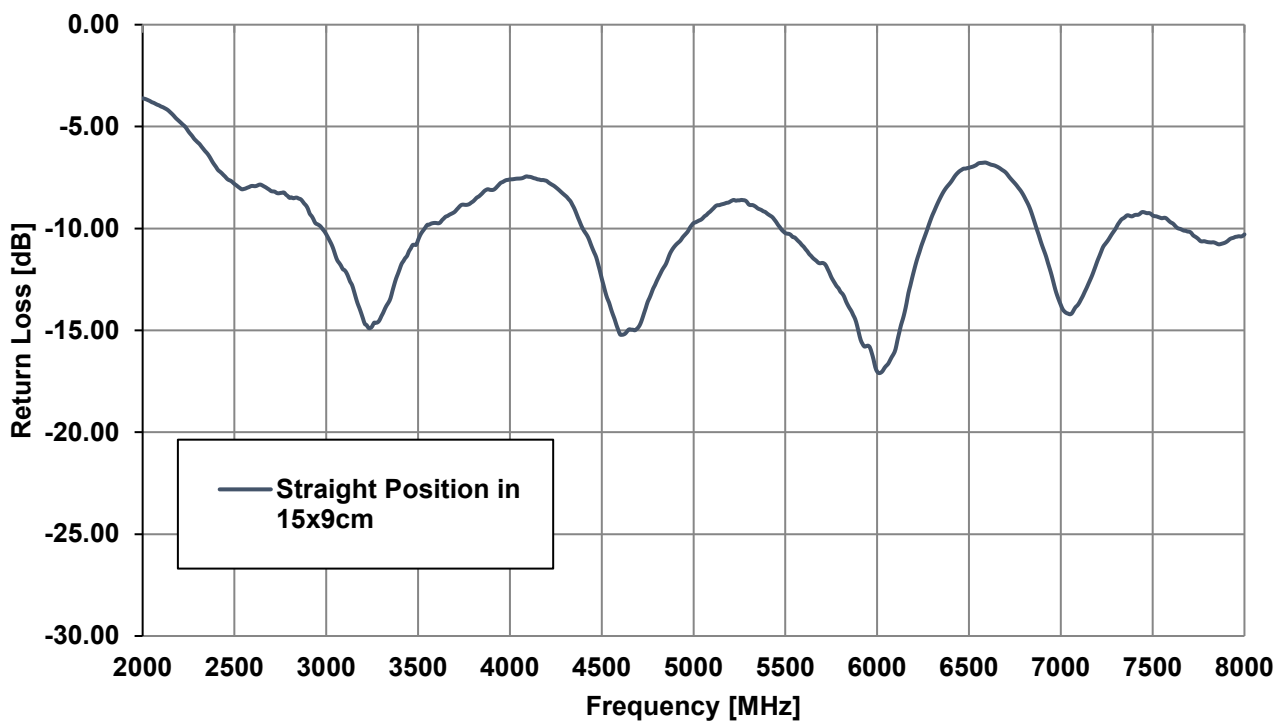

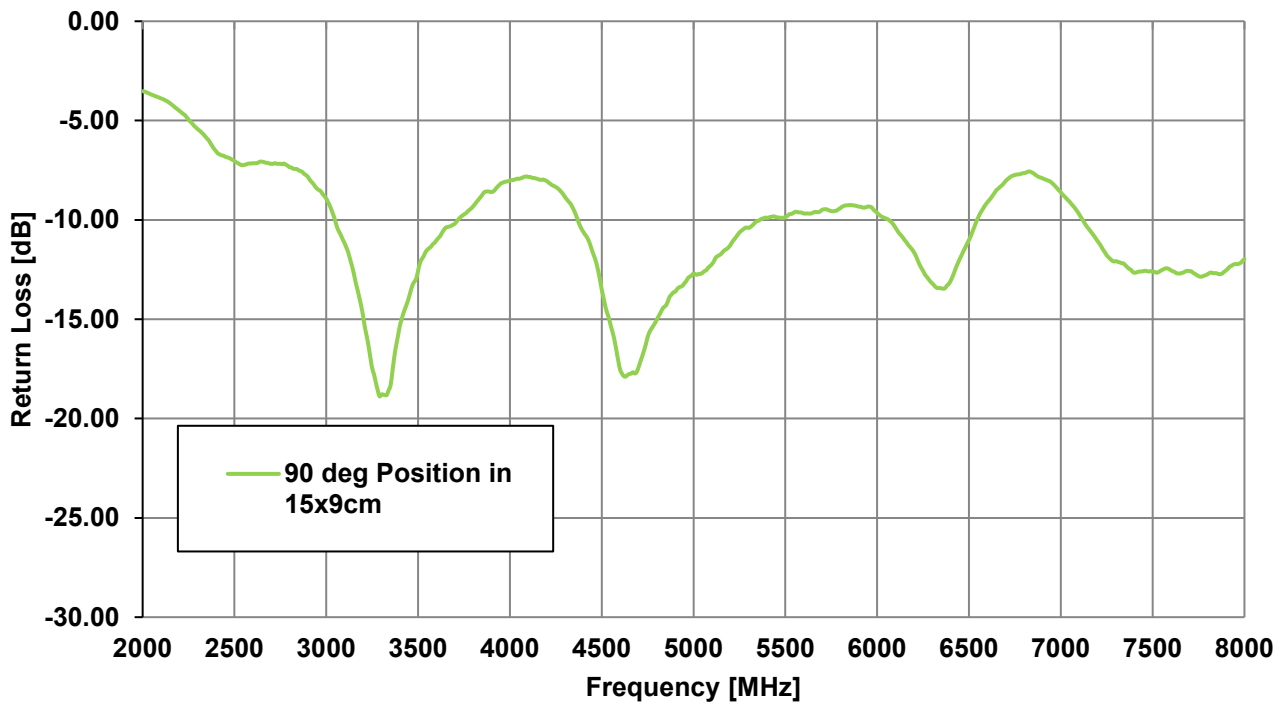



### 3.13 Efficiency – 15\*9cm Ground Plane

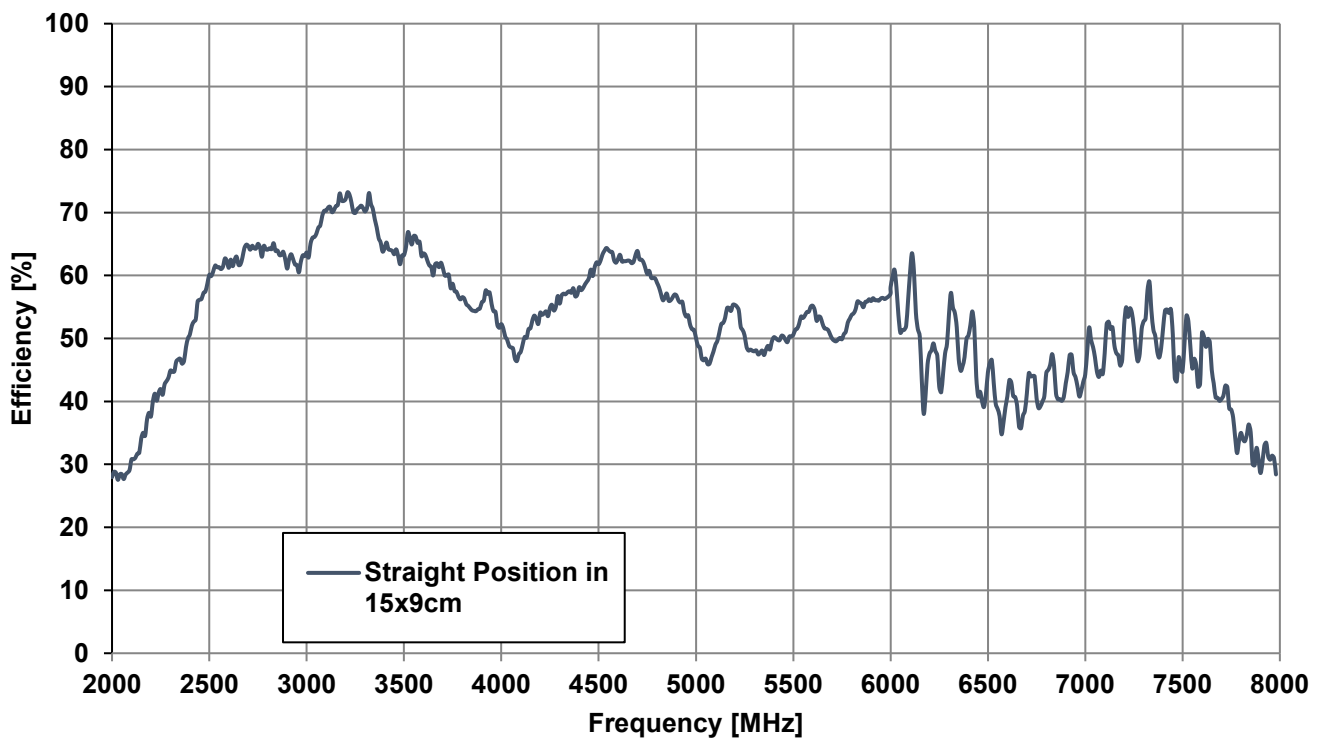

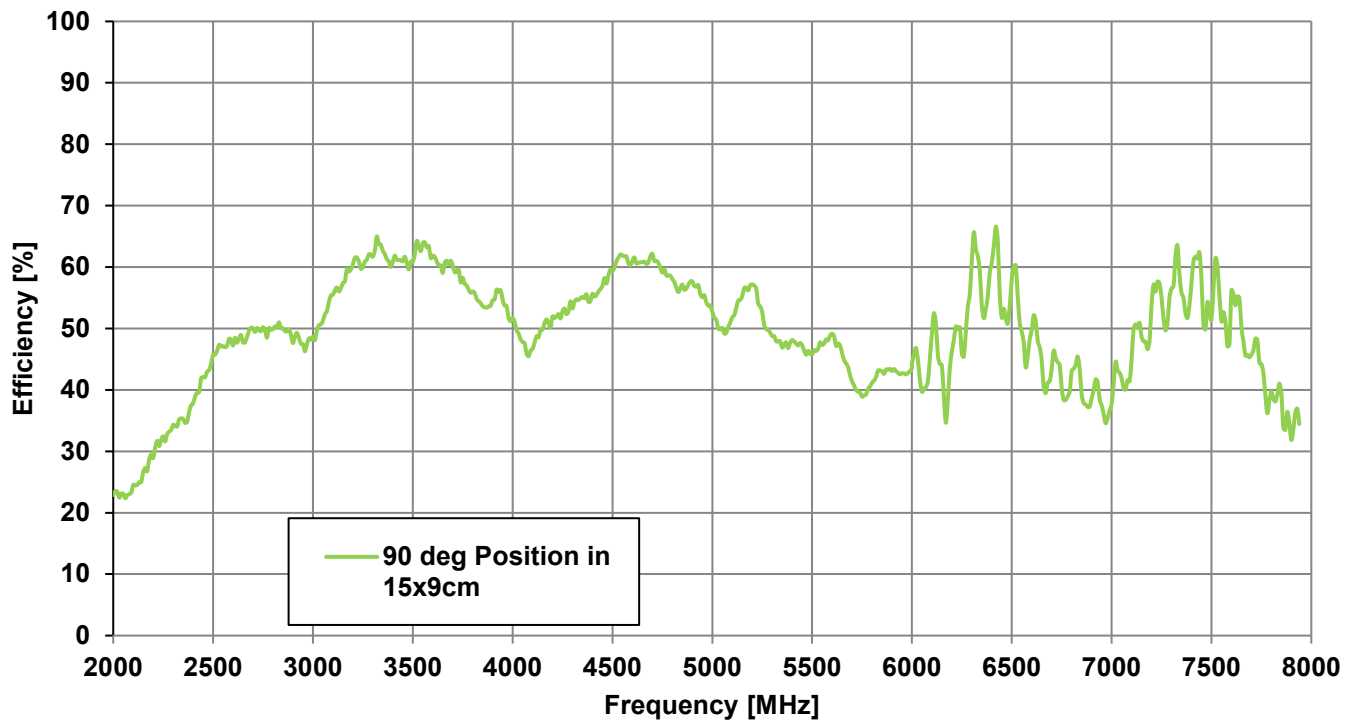



**3.14** Peak Gain – 15\*9cm Ground Plane

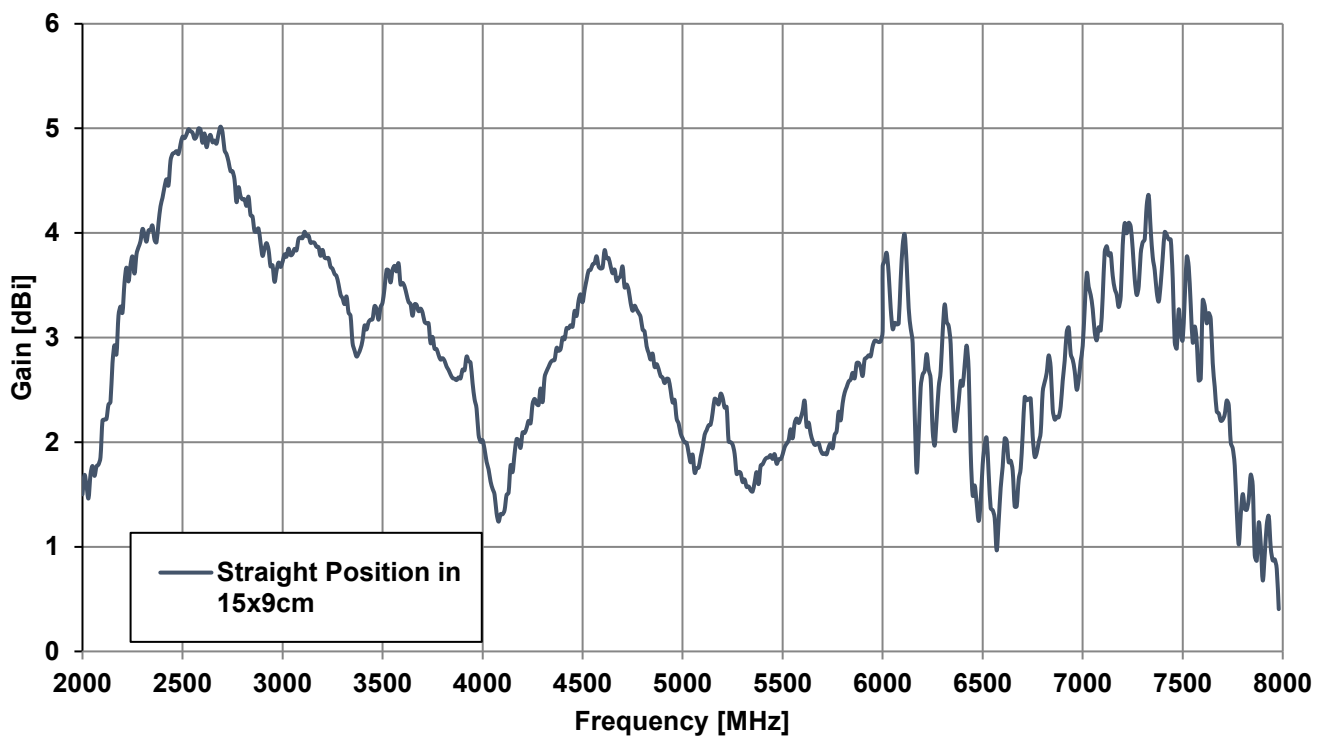

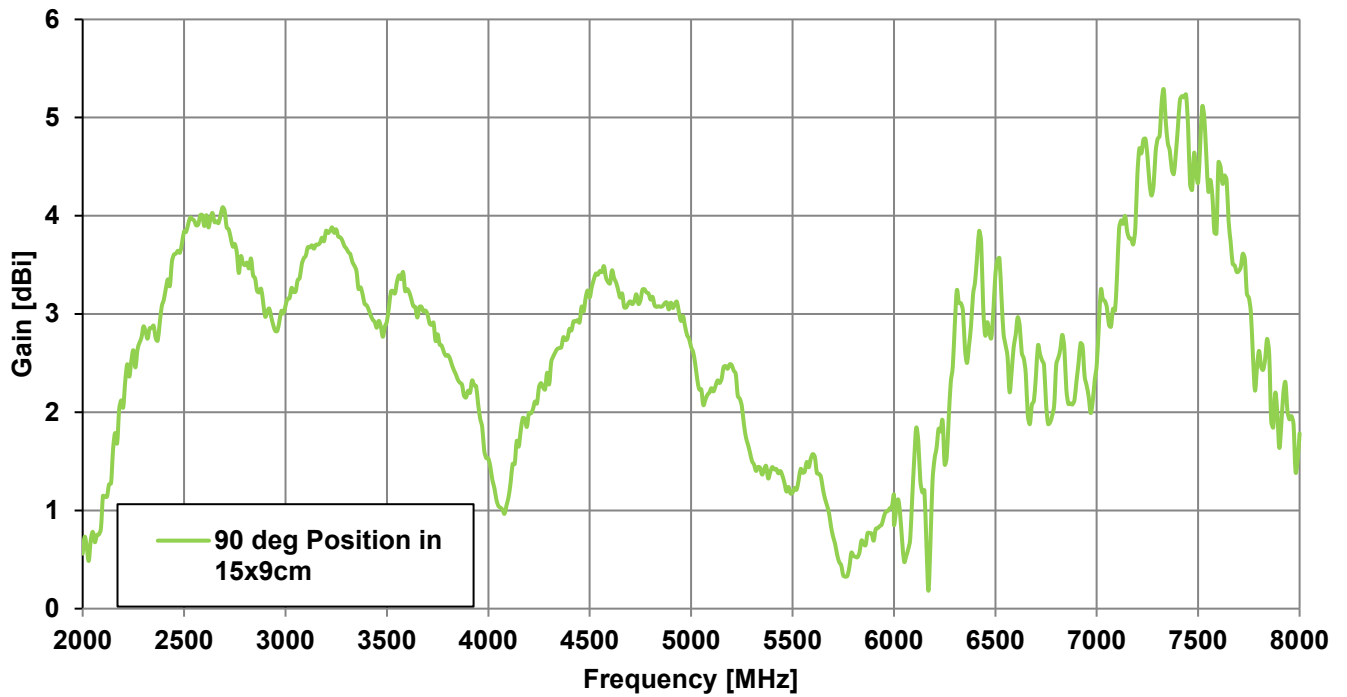


### 3.15 Average Gain – 15\*9cm Ground Plane

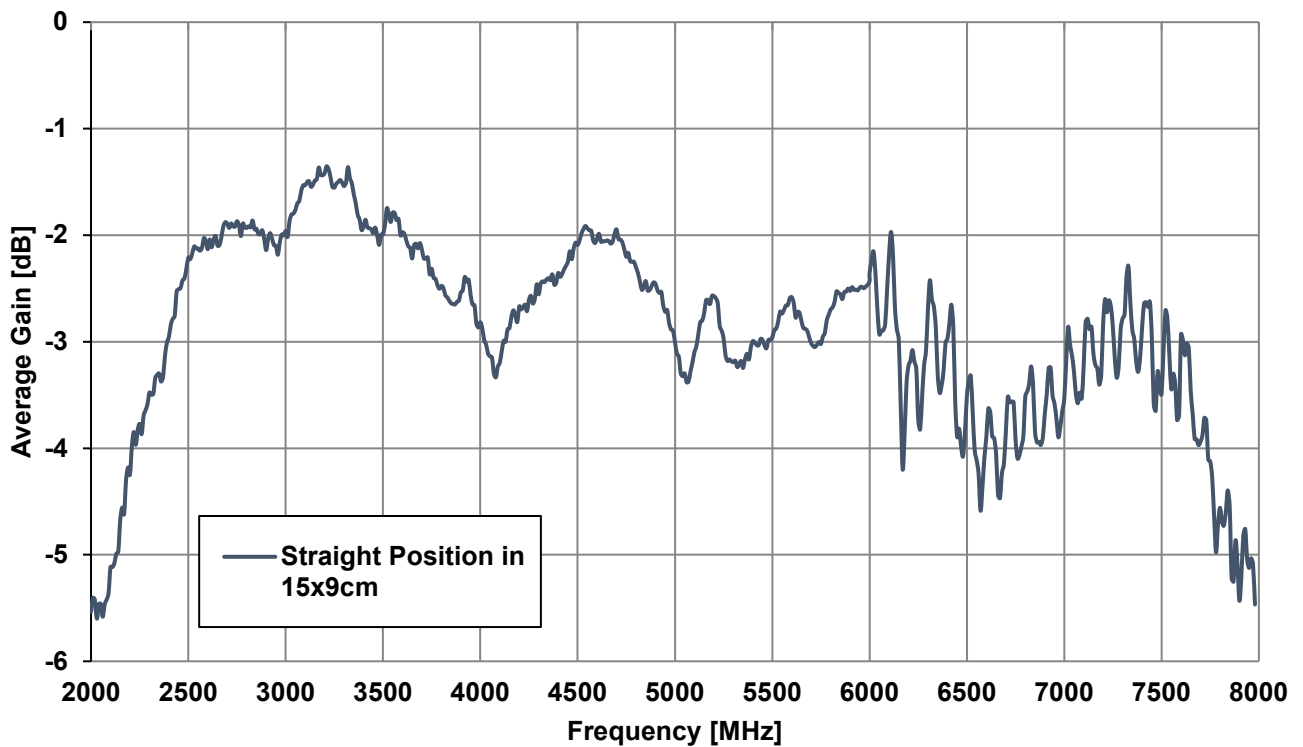

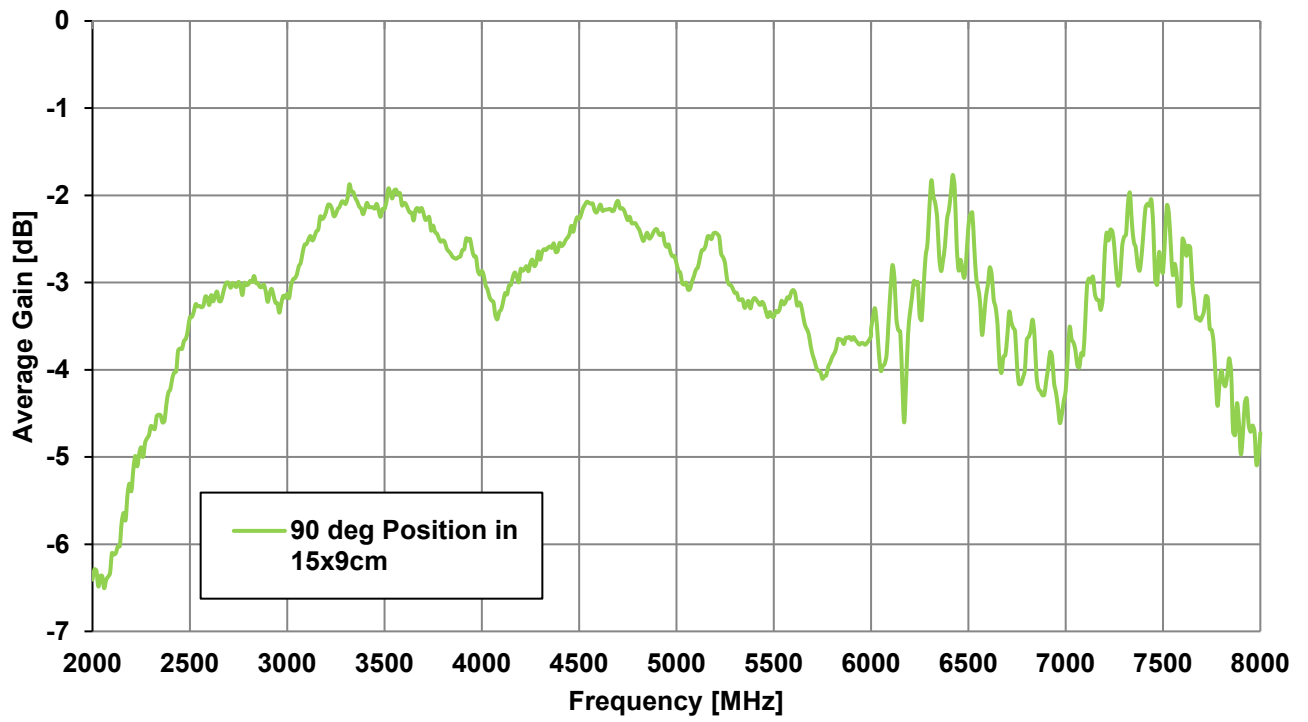


## 4. Radiation Patterns


### 4.1 Test Setup – Straight

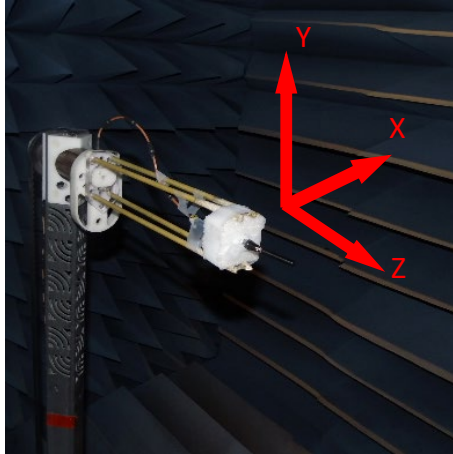


Free space

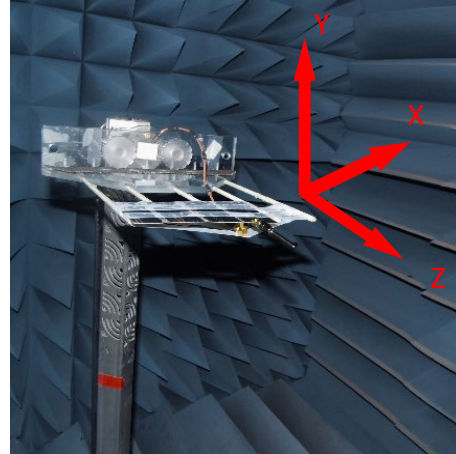

15x9cm ground plane

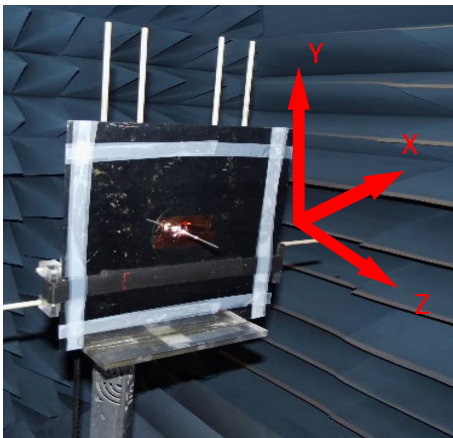


30x30cm metal ground center

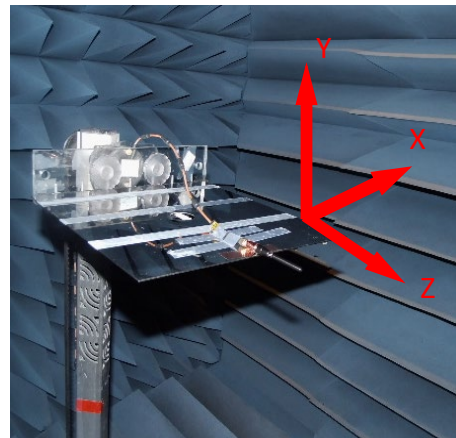


30x30cm metal ground edge


### 4.2 Test Setup – Bent (90°)

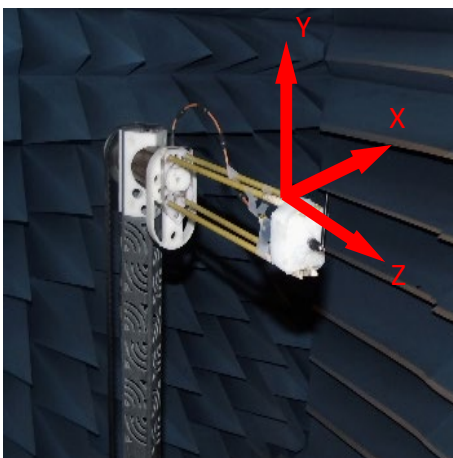


Free space

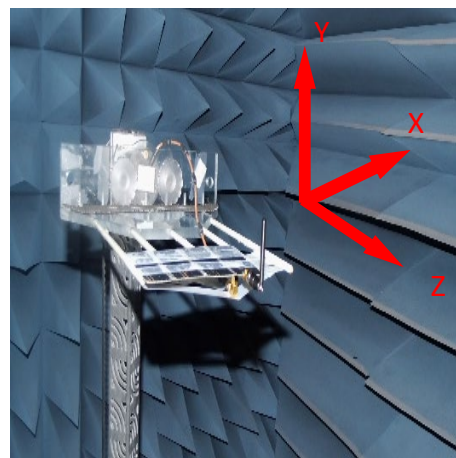

15x9cm ground plane

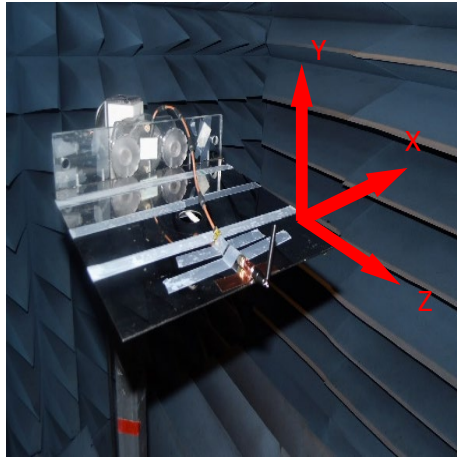


30x30cm metal ground center

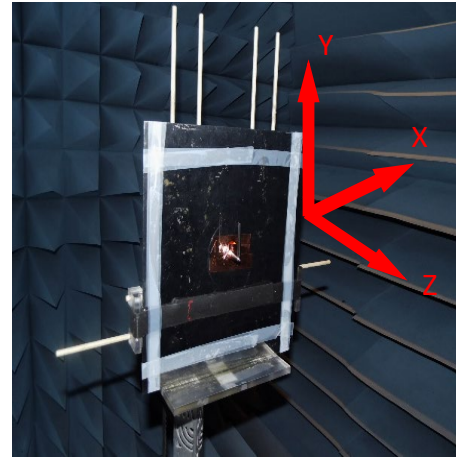


30x30cm metal ground edge

### 4.3 Straight Free Space - 2D Radiation Patterns


XY Plane

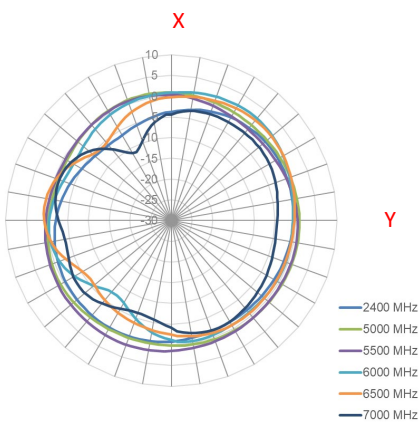

XZ Plane

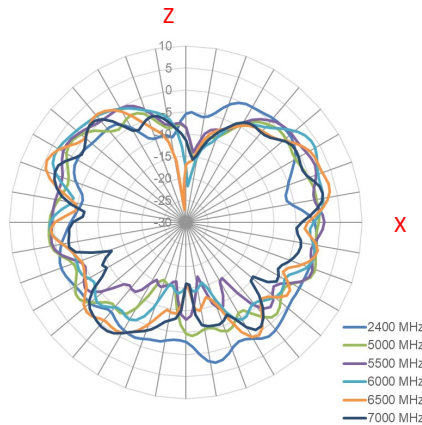


YZ Plane

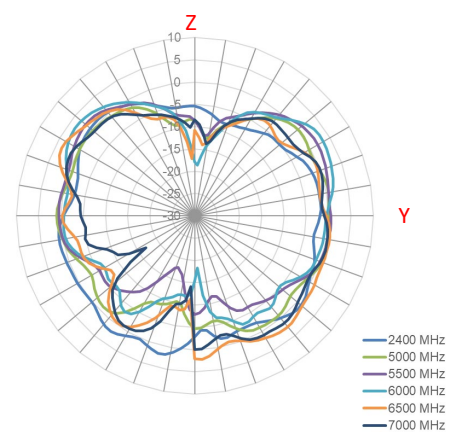


### 4.4 Bent 90° Free Space - 2D Radiation Patterns


XY Plane

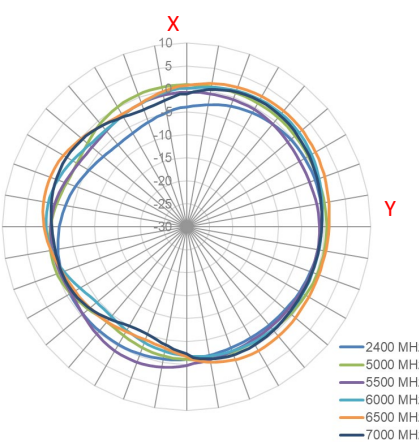

XZ Plane

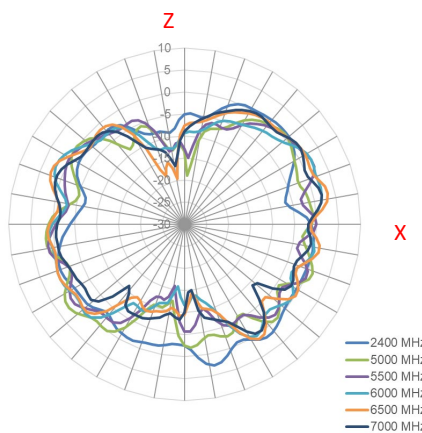


YZ Plane

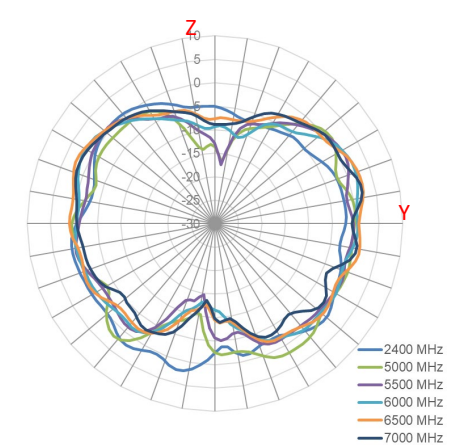


### 4.5 Straight 30\*30cm Center Ground Plane - 2D Radiation Patterns


XY Plane

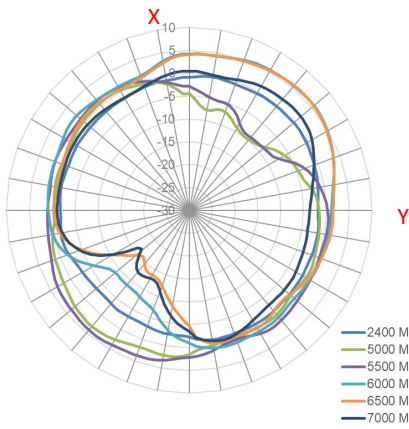

XZ Plane

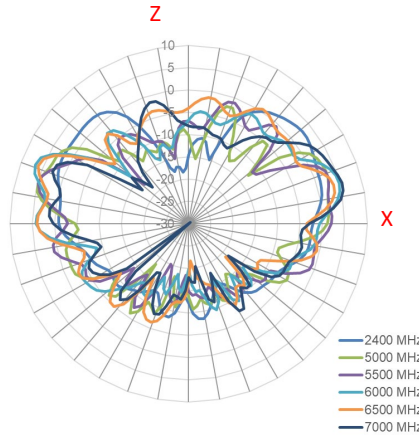


YZ Plane

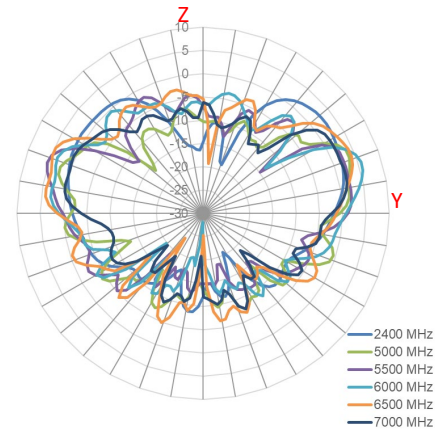


### 4.6 Bent 90° 30\*30cm Center Ground Plane - 2D Radiation Patterns


XY Plane

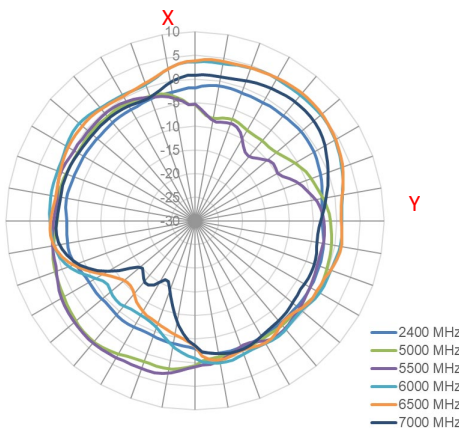

XZ Plane

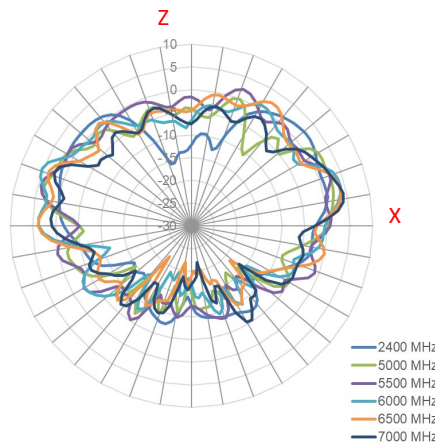


YZ Plane

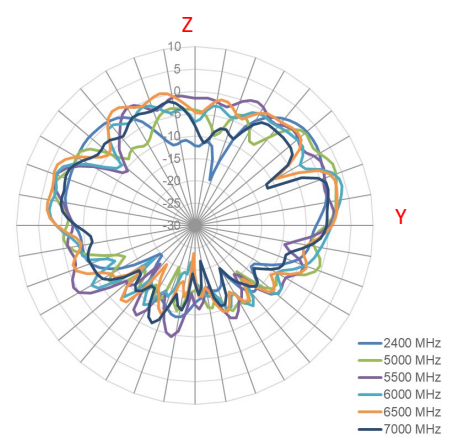


### 4.7 Straight 30\*30cm Edge Ground Plane - 2D Radiation Patterns


XY Plane

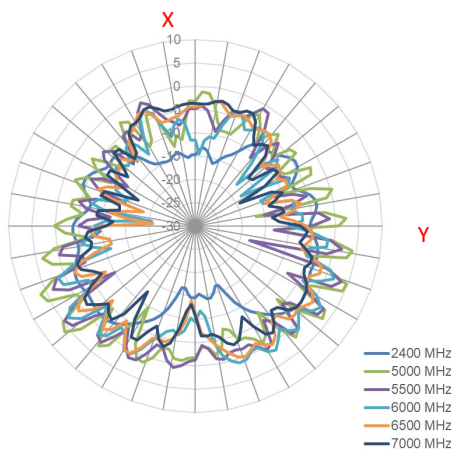

XZ Plane

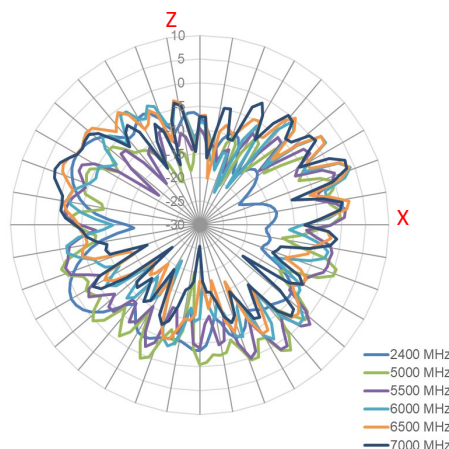


YZ Plane

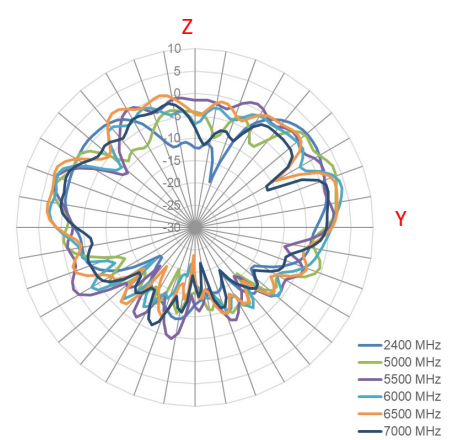


### 4.8 Bent 90° 30\*30cm Edge Ground Plane - 2D Radiation Patterns


XY Plane

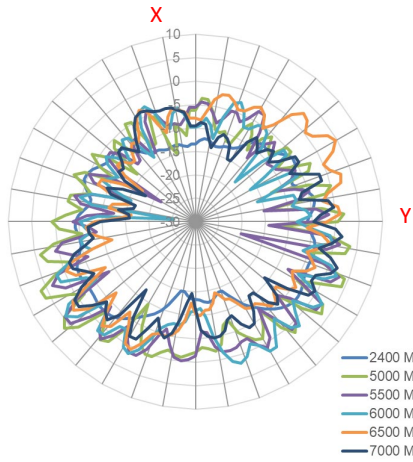

XZ Plane

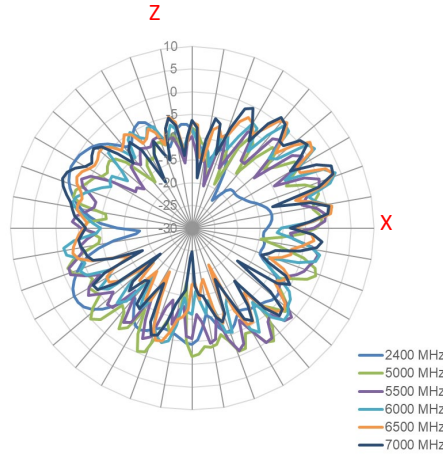


YZ Plane

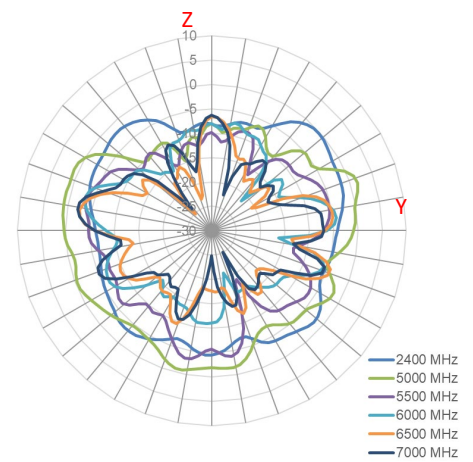


### 4.9 Straight 15\*9cm Ground Plane - 2D Radiation Patterns


XY Plane

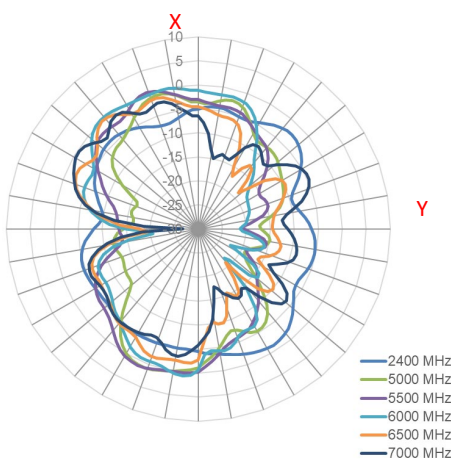

XZ Plane

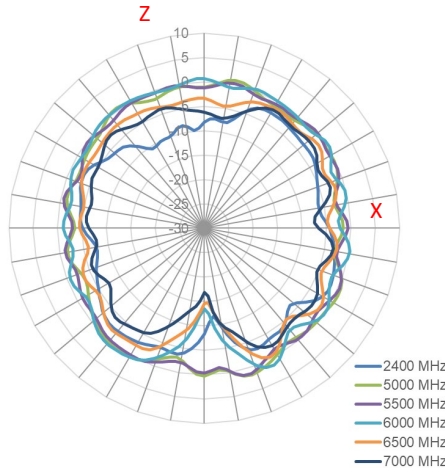


YZ Plane

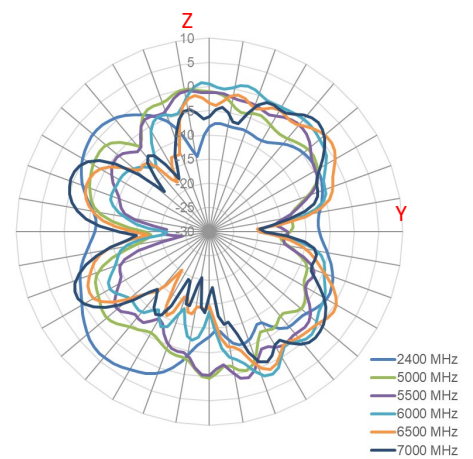


### 4.10 Bent 90° 15\*9cm Ground Plane - 2D Radiation Patterns


XY Plane

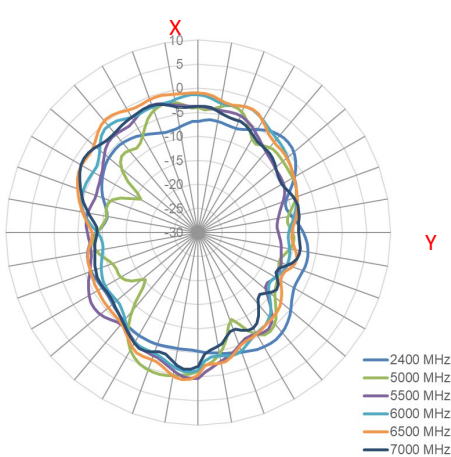



XZ Plane

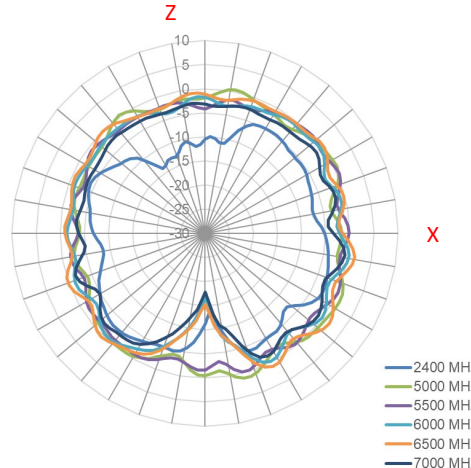

YZ Plane

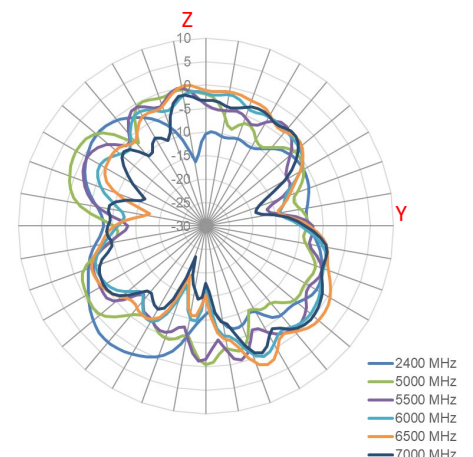


## 5. Mechanical Drawing (Units: mm)

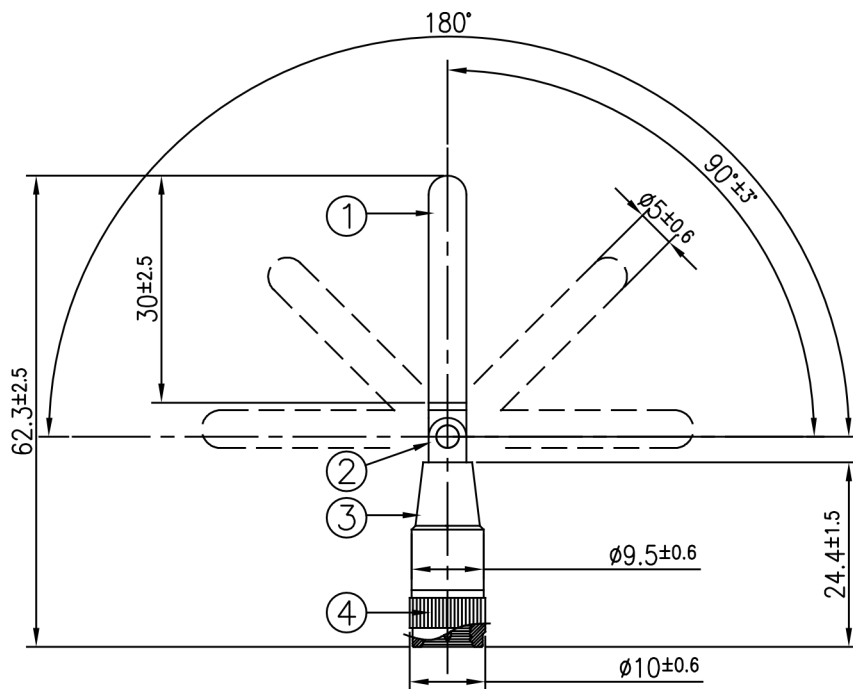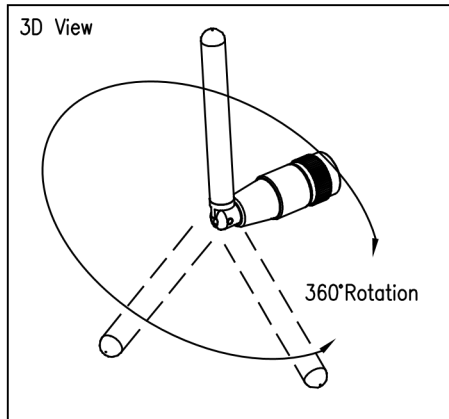

	Name	Material	Finish	QTY
1	Top housing	ABS	Blue, code: PANTONE 301 C (Alternative: RAL 270 30 45)	1
2	Lower connector	Brass 3604	Ni Plated	1
3	Bottom housing	ABS	Blue, code: PANTONE 301 C (Alternative: RAL 270 30 45)	1
4	Copper joint housing	Brass 3604	Ni Plated	1

## 6. Installation

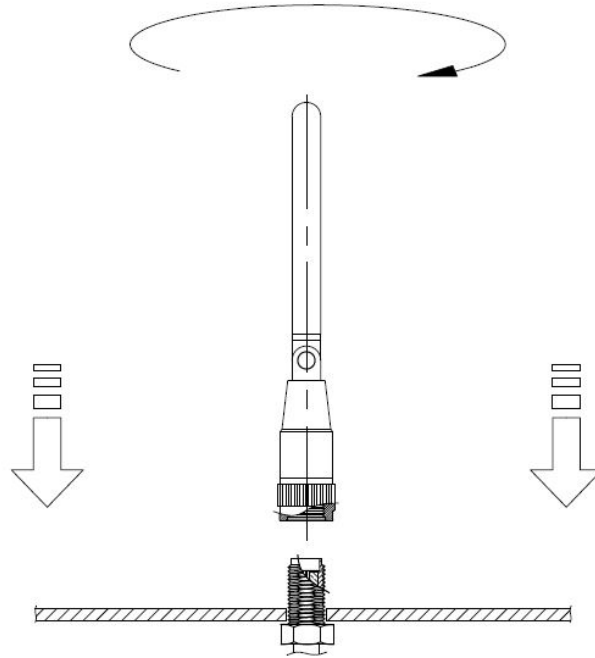


Recommended torque for mounting is 0.9 N·m  
Maximum torque for mounting is 1.176 N·m

## 7. Packaging


1pc GW.05.0153L per PE Bag  
 Bag Dimension: 74\*42mm  
 Weight: 8.5g



100pcs GW.05.0153L per Large PE Bag  
 Bag Dimensions: 180\*280mm  
 Weight: 100g

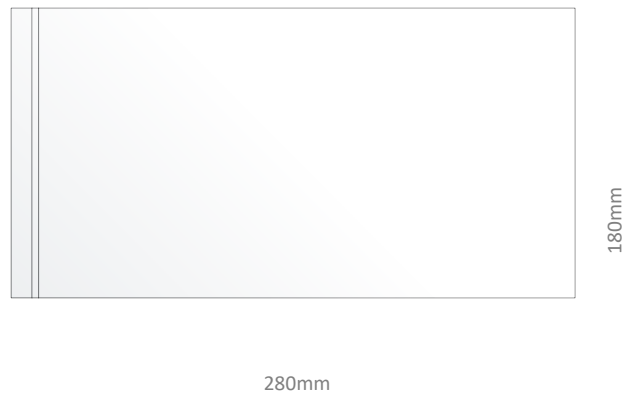

1500pcs GW.05.0153L per Carton  
 Dimensions: 360\*310\*160mm  
 Weight: 2.5Kg

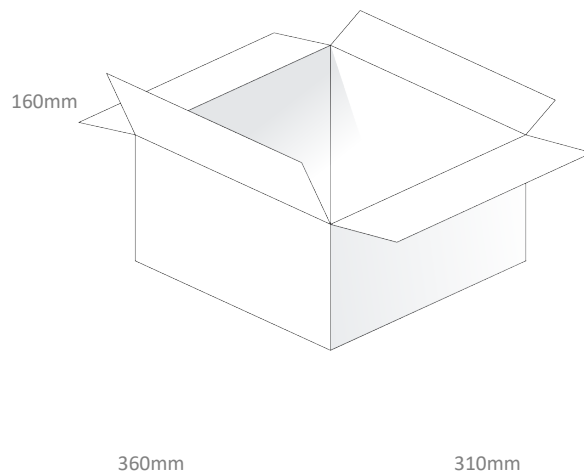

Changelog for the datasheet

**SPE-24-8-063 – GW.05.0153L**

<b>Revision: A (Original First Release)</b>	
Date:	2024-11-27
Notes:	
Author:	Cesar Sousa

**Previous Revisions**




**TAOGLAS**®

[www.taoglas.com](http://www.taoglas.com)

