



Power Relay F

TE Internal #: 1-1393304-1

General Purpose Power Relay, DC, Monostable, 1 Form A (NO), 25 A Contact Rating, 24 VDC Coil Voltage, 24 VDC Contact Voltage, Power Relay F

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A (NO)**

Contact Current Rating: **25 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Arrangement	1 Form A (NO)
---------------------	---------------

Electrical Characteristics

Contact Switching Load (Min)	1000mA @ 5VDC
Contact Limiting Short-Time Current	300 A
Contact Limiting Making Current	240 A
Coil Resistance	324 Ω
Contact Limiting Continuous Current	70 A
Contact Limiting Breaking Current	25 A
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Current Rating	25 A
Coil Voltage Rating	24 VDC
Contact Voltage Rating	24 VDC
Coil Power Rating DC	1.8 W
Insulation Initial Dielectric Between Contacts & Coil	500 Vrms

Body Features

Product Weight	38 g[1.3 oz]
----------------	--------------



Enclosure Type	Dust Protected
----------------	----------------

Contact Features

Contact Material	Silver Alloy
------------------	--------------

Termination Features

Main Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Coil Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Mechanical Attachment

Product Mounting Feature Type	Mounting Brackets
-------------------------------	-------------------

Product Mount Type	Socket Mount
--------------------	--------------

Dimensions

Product Width	25.9 mm[1.019 in]
---------------	-------------------

Product Length	25.9 mm[1.019 in]
----------------	-------------------

Product Height	24.9 mm[.98 in]
----------------	-----------------

Usage Conditions

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	125 °C[257 °F]
---	----------------

Operation/Application

Current Type	DC
--------------	----

Coil Magnetic System	Monostable
----------------------	------------

Other

Contact Current Class	>50 A
-----------------------	-------

Coil Power Rating Class	1.5 W
-------------------------	-------

Environmental Ambient Temperature Class	105 – 125 °C
---	--------------

Height Class (Mechanical)	25 – 30 mm
---------------------------	------------

Length Class (Mechanical)	25 – 30 mm
---------------------------	------------

Width Class (Mechanical)	25 – 30 mm
--------------------------	------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2025 (247)

Candidate List Declared Against: JUNE 2024 (241)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | Power Relay F

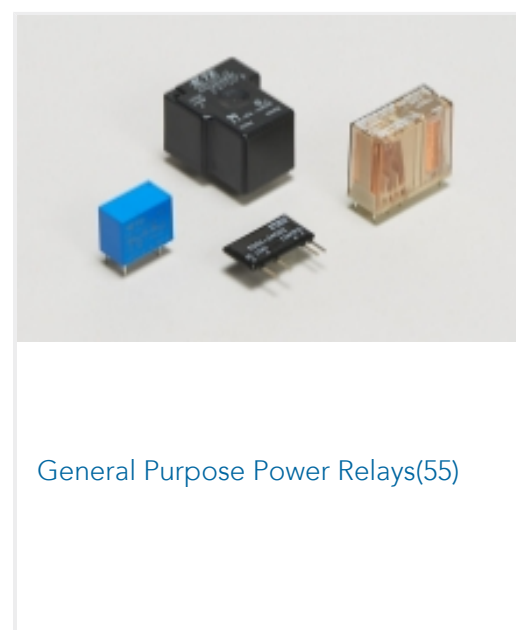



Customers Also Bought

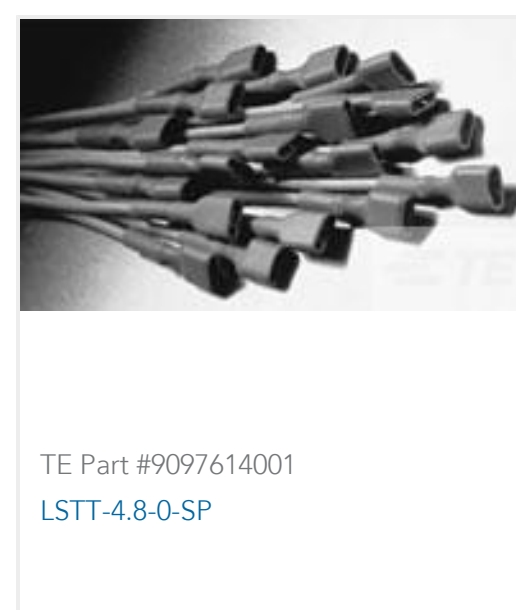

Documents

Product Drawings

[V23134J1053D642-EV-CBOX](#)

English

CAD Files

Customer View Model

[ENG_CVM_1-1393304-1_S00F.3d_igs.zip](#)

English

Customer View Model



[ENG_CVM_1-1393304-1_S00F.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1-1393304-1_S00F.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[MFINITY Modular Hard Wired Fuse and Relay Box](#)

English

[Automotive Relay Application Notes](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English