



NTC thermistors for temperature measurement

Probe assemblies

Series/Type:	Oil Circuit Temperature Sensor OCTS
Ordering code:	B58101A0851A000
Date:	2024-02-27
Version:	1.0

Applications

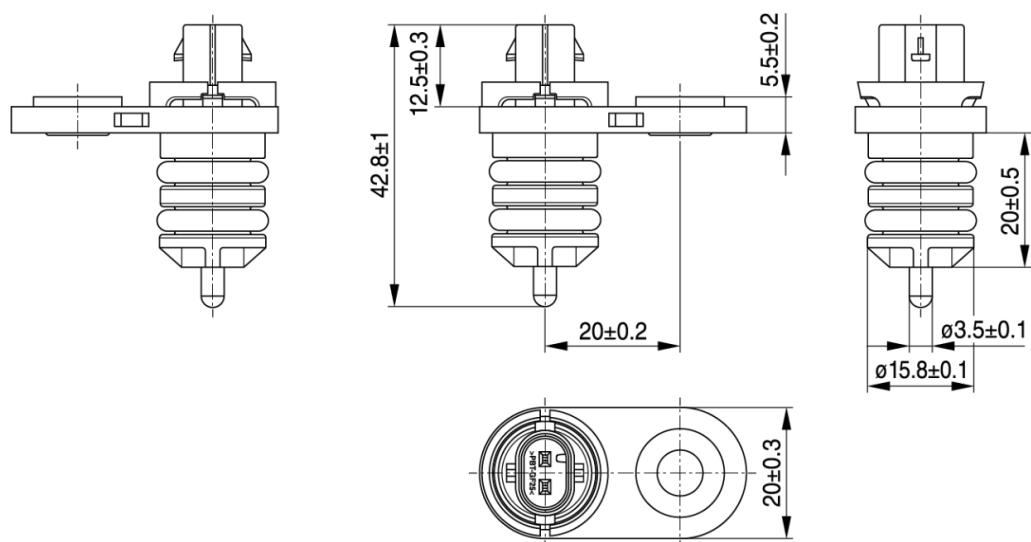
- Automotive: thermal management
- Immersion temperature measurement sensor

Features

- Very fast response time
- High temperature resistance up to 150 °C
- Fully sealed system for immersion applications
- Specific RT curve optimized for the application
- Very light weight (< 11 g)



Dimensional drawings



Delivery mode

Cardboard box, 150 pieces

Ordering code

B58101A0851A000

Technical data and specification

Climatic category (IEC 60068-1)			40/150/56
Lower category temperature		°C	-40
Upper category temperature		°C	150
Maximum system pressure		bar	10
Rated resistance R_R // Tolerance	$R_R // \Delta R_R / R_R$	$\Omega // \%$	876 // ± 1
Rated temperature	T_R	°C	70
Resistance at 25 °C	R_{25}	Ω	5000
B-value $B_{(25/100)}$ // Tolerance	B_R	K // %	3988 // ± 1
R/T curve no.			8016
Thermal time constant (in water)	τ_{63}	s	< 4
Max. power rating (at 25 °C)	P_{25}	mW	60
Insulation resistance (500 V _{DC} for 60 s)	R_{ins}	M Ω	>100
Sensor accuracy (-40 °C ≤ T ≤ 125 °C)	ΔT	K	< ± 1
Sensor accuracy	ΔT_{max}	K	± 1.4

Remark

Sensors must be stored in original package prior to assembly.

Initial NTC element resistance / temperature curve

R/T curve 8016 / A01
R at 25°C 5000 Ω
B (25/100) 3988 K $\pm 1\%$
R_N at 70 °C 876 $\Omega \pm 1\%$

Temp. °C	R _{nom} Ω	R _{min} Ω	R _{max} Ω	ΔR $\pm\%$	ΔT $\pm^\circ\text{C}$	α %/K
-40	168,250	157,258	179,242	6.50	1.00	6.70
-35	121,295	113,806	128,783	6.20	1.00	6.40
-30	88,500	83,341	93,659	5.80	0.90	6.20
-25	65,185	61,600	68,770	5.50	0.90	6.00
-20	48,535	46,020	51,050	5.20	0.90	5.80
-15	36,465	34,686	38,243	4.90	0.90	5.60
-10	27,665	26,397	28,933	4.60	0.80	5.40
-5	21,158	20,248	22,067	4.30	0.80	5.30
0	16,325	15,667	16,983	4.00	0.80	5.10
5	12,694	12,216	13,172	3.80	0.80	5.00
10	9,950.0	9,600.0	10,300	3.50	0.70	4.80
15	7,854.0	7,597.0	8,111.0	3.30	0.70	4.70
20	6,245.0	6,056.0	6,434.0	3.00	0.70	4.50
25	5,000.0	4,860.0	5,140.0	2.80	0.60	4.40
30	4,029.0	3,924.0	4,133.0	2.60	0.60	4.30
35	3,266.0	3,188.0	3,343.0	2.40	0.60	4.10
40	2,663.0	2,606.0	2,721.0	2.20	0.50	4.00
45	2,184.0	2,141.0	2,227.0	2.00	0.50	3.90
50	1,802.0	1,770.0	1,833.0	1.80	0.50	3.80
55	1,493.0	1,469.0	1,517.0	1.60	0.40	3.70
60	1,244.0	1,227.0	1,261.0	1.40	0.40	3.60
65	1,042.0	1,029.0	1,054.0	1.20	0.30	3.50
70	876.00	867.20	884.80	1.00	0.30	3.40
75	740.70	731.70	749.70	1.20	0.40	3.30
80	629.00	620.30	637.70	1.40	0.40	3.20
85	536.20	527.90	544.40	1.50	0.50	3.20
90	458.80	451.10	466.60	1.70	0.50	3.10
95	394.30	387.00	401.50	1.80	0.60	3.00

Temp. °C	R _{nom} Ω	R _{min} Ω	R _{max} Ω	ΔR ±%	ΔT ±°C	α %/K
100	340.00	333.30	346.70	2.00	0.70	2.90
105	294.30	288.00	300.60	2.10	0.70	2.90
110	255.60	249.80	261.40	2.30	0.80	2.80
115	222.70	217.40	228.00	2.40	0.90	2.70
120	194.60	189.70	199.60	2.50	1.00	2.70
125	170.80	166.30	175.40	2.70	1.00	2.60
130	150.40	146.30	154.60	2.80	1.10	2.50
135	132.70	128.90	136.60	2.90	1.20	2.50
140	117.40	113.90	120.90	3.00	1.20	2.40
145	104.20	100.90	107.40	3.10	1.30	2.40
150	92.65	89.64	95.66	3.20	1.40	2.30

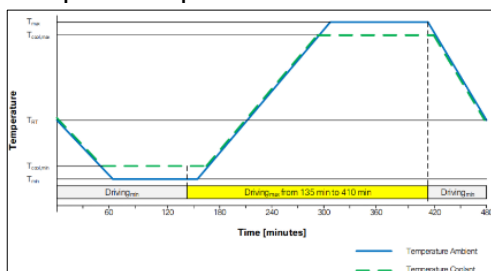
Reliability data

Tests	Description/Reference	Criteria
-------	-----------------------	----------

ELECTRICAL TESTS

Response time	Response time of the sensor in a transition from $T_i = 20\text{ °C}$ to $T_f = 80\text{ °C}$ (in water)	$t_{63\%} < 4\text{ s}$
Insulation resistance	Sensor head is immersed into a metal ball bath Test voltage: 500 V DC Rise/fall time: 1 s Duration: 60 s	5 M Ω or more Resistance before and after test within min/max values listed in RT charts

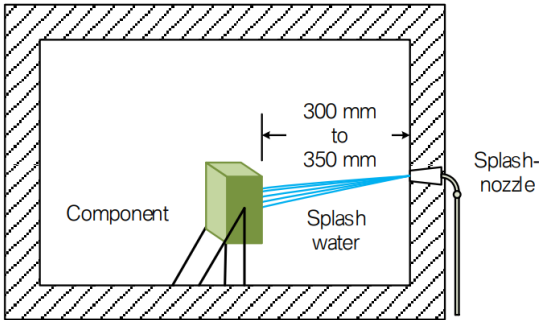
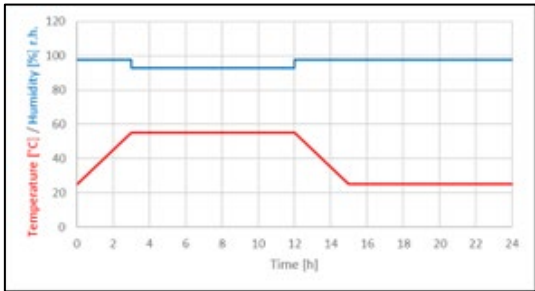
MECHANICAL TESTS

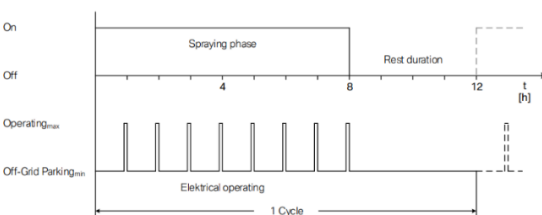
Vibration test (with temperature superposition)	Sinusoidal Vibration profile: Frequency: 5 Hz; 10 Hz; 500 Hz; 1000 Hz; 2000 Hz Amplitude: 21.57 m/s² Duration per axis: 22 h Total axis: 3 (X, Y, Z) Temperature profile:  <table><thead><tr><th>Time in min</th><th>Temperature in °C</th></tr></thead><tbody><tr><td>0</td><td>T_{RT}</td></tr><tr><td>60</td><td>T_{min}</td></tr><tr><td>150</td><td>T_{min}</td></tr><tr><td>300</td><td>T_{max}</td></tr><tr><td>410</td><td>T_{max}</td></tr><tr><td>480</td><td>T_{RT}</td></tr></tbody></table> T_{max}: +150 °C T_{min}: -40 °C n: 2.75 (until end of vibration test) V: 5 V DC over pull-up resistor Connected and intermittent powered	Time in min	Temperature in °C	0	T _{RT}	60	T _{min}	150	T _{min}	300	T _{max}	410	T _{max}	480	T _{RT}	ΔR/R ≤ 3% at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) R_{insu} > 5 MΩ Response time t63% ≤ 4 s No signs of physical deformation
Time in min	Temperature in °C															
0	T _{RT}															
60	T _{min}															
150	T _{min}															
300	T _{max}															
410	T _{max}															
480	T _{RT}															
Mechanical shock	Pulse shape: half sinusoidal Acceleration: 500 m/s² Pulse duration: 6 ms V: 5 V DC over pull-up resistor n: 10 shocks Number of directions: 3 (±X, ±Y, ±Z) Connected and powered	ΔR/R ≤ 3% at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) R_{insu} > 5 MΩ Response time t63% ≤ 4 s No signs of physical deformation														

Drop test	Surface: concrete floor Fall height: 1 m Temperature: room temperature Fall axis: $\pm X$, $\pm Y$, $\pm Z$ n: 1 time in each direction Not connected and not powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Leakage test	Pressure 500 mbar (0.5 bar) Gas: helium Leakage rate: 150 Pa/min Temperature: room temperature Not connected and not powered.	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$

ENVIRONMENTAL TESTS

Step temperature test	$T_{\text{change / step}}$: 5 °C T_{RT} : 25 °C T_{max} : +150 °C T_{min} : -40 °C t_{dwell} : 5 + 15 min t_{transfer} : 1 min n: 1 cycle V: 5 V DC over pull-up resistor Test medium: air Connected and constant powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Thermal cycling test	T_{max} : +150 °C T_{min} : -40 °C t_{dwell} : 5 + 15 min t_{transfer} : 4 °K/min n: 100 cycles V: 5 V DC over pull-up resistor Test medium: air Connected and intermittent powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Thermal shock in air	T_{max} : +150 °C T_{min} : -40 °C t_{dwell} : 31 min t_{transfer} : < 30 s n: 100 cycles Test medium: air Not connected and not powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Hot water jet inspection	IP Classification: IPX9K Water temperature: 80 °C	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$

Thermal shock with splash water/surge water	$T_{\max}$: +150 °C $T_{\min}$: 0 ... 4 °C n: 100 cycles Splash duration: 3 s Flow rate: 3 to 4 liters per water splash/ nozzle V: 5 V DC over pull-up resistor Connected and intermittent powered 	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Thermal cycling test in oil (endurance test)	$T_{\min}$: +20 °C $T_{\max}$: +150 °C t_{dwell}: 10 min t_{transfer}: < 30 s Test medium: ATF oil n: 1500 cycles Immersion range: up to sealing element Not connected and not powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Temperature humidity cycle	$T_{\max}$: +55 °C $T_{\min}$: +25 °C Profile:  Upper humidity: 97.5% RH Lower humidity: 93% RH n: 6 cycles (1 cycle: 24 h) Total duration: 360 h V: 5 V DC over pull-up resistor Connected and not powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$

Humidity heat constant	Humidity: 93% RH Temperature: +40 °C Test duration: 21 days (504 h) Test medium: air Not connected and not powered	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$
Salt spray test	Temperature pre storage test: Temperature: 150 °C Dwell time: 168 h Salt spray test: Chamber temperature: 35 °C n: 2 cycles Total duration: 24 h V: 5 V DC over pull-up resistor Connected and intermittent powered 	$\Delta R/R \leq 3\%$ at (-40 °C, 20 °C, 60 °C, 100 °C, 140 °C) $R_{\text{insu}} > 5 \text{ M}\Omega$ Response time $t_{63\%} \leq 4 \text{ s}$ No signs of physical deformation Evaluation of sealing surfaces for corrosive infiltration

Cautions and warnings

Storage

- Store sensors only in original packaging. Do not open the package prior to storage.
- Storage conditions in original packaging: storage temperature $-25\text{ }^{\circ}\text{C}$ to $+45\text{ }^{\circ}\text{C}$. relative humidity $\leq 75\%$ annual mean. $< 95\%$ maximum 30 days per annum. dew precipitation is inadmissible.
- Do not store sensors where they are exposed to heat or direct sunlight.
- Avoid contamination of sensor surface during storage handling and processing.
- Avoid storage of sensors in harmful environments like corrosive gases (SOx, Cl etc).
- Use the components as soon as possible after opening the factory seals i.e. the polyvinyl-sealed packages.

Handling

- NTC sensors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Do not touch components with bare hands. Gloves are recommended.
- Avoid contamination of sensor surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts. which might lead to reduced reliability or lifetime.

Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes. The maximum temperature of the thermistor must not be exceeded.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the sensor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the sensor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the sensor surface during processing.
- The connections of sensors (e.g. cable end. wire end. plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Tensile forces on cables or leads must be avoided during mounting and operation.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC sensor (e.g. through plug terminals). In particular water-based substances (e.g. soap suds) must not be used as mounting aids for sensors.

Operation

- Use sensors only within the specified operating temperature range.
- Use sensors only within the specified power range.
- Environmental conditions must not harm the sensors. Only use the sensors under normal atmospheric conditions or within the specified conditions.
- Ensure that no significant thermo-mechanical stress occurs during operation due to the mounting situation. Fixtures must not overstress the sensor by an excessive mechanical preload.
- It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals).
- Avoid dewing and condensation unless sensor is specified for these conditions.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete but merely reflects the experience of TDK Electronics AG.

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet at www.tdk-electronics.tdk.com/orderingcodes.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

Important notes

8. The trade names EPCOS, CarXield, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, FilterCap, FormFit, InsuGate, LeaXield, MediPlas, MiniBlue, MiniCell, MKD, MKK, ModCap, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PiezoBrush, PlasmaBrush, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SurfIND, ThermoFuse, WindCap, XieldCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2024-02