

Features

- Product Temperature withstand 150°C.
- “19.5 & 22.5 MM SLIM Height” SSR Design.
- “31 MM Height” Inbuilt “C-56” Heat sink SSR Design.
- With easy open & lock IP 20 protection Flaps on I/P & O/P Terminals.
- Random Turn-On SSR.
- Rating from 16 Amp to 200 Amp @25°C 24-600 VAC.
- Short Circuit Protected SSR up to 115 Amp per phase current by help of suitable “B cule MCB.
- No need to use semiconductor Fuse due to short circuit protected SSR.
- Fire Retardant Plastic as per UL94 V0 GRADE.
- New improved SEMS Screw -Washers input & Output terminals.
- Improved Direct Bonded Copper (DBC) for higher Amp Relays.
- High resistance to aggressive chemicals and dust due to special Potting.
- Logic compatibility, Fast switching, Low coupling capacitance
- Inbuilt transient voltage suppressor.

Advantages Of SSR Over Contractor / Mechanical

- Random turn-on SSR
- High resistance to shock, vibration and abrasion
- High resistance to aggressive chemicals and dust
- No electromechanical or acoustical noise
- Logic compatibility
- Low coupling capacitance
- Long life cycle . Up to 10¹¹ cycles
- Increased system temperature accuracy
- Improved system reliability because SSRs have no moving parts or contacts to degrade
- No contact arcing, low electromagnetic interference, high surge capability
- Solid state Relays offer a very fast response time with absolutely NO contact bounce
- SSRs are typically smaller than EMRs, conserving valuable real estate in printed-circuit board applications
- SSRs can be provided as surface-mount technology (SMT)parts, which means lower cost and easier SMT printed-circuit board manufacture
- Do not generate electrical noise

General Specification

Max Barrier Layer Temperature (T _{max})	: < 125°C
Ambient Temperature Range (T _{amb})	: 0-85 °C
SSR Storage Temperature Range (T _{st})	: -40°C to 80°C
Input Terminal Screw Torque Range	: T = 1.6 N.m (Max.)
Output Terminal Screw Torque Range	: T = 2.5 N.m (Max.)
Power Factor COSφ @ Max. Load @ 480V AC	: >0.55
Housing Material	: UL-94 V0 Grade
Base Plate	: 5mm Aluminium, 2mm Copper, C-56 Heat Sink
SSR Weight	: ≤ 120 grams
Control Input Electrical Wire Size (Max.)	: Up to 2.1 sq mm (14 AWG)
Power Output Electrical Wire Size (Max.)	: Up to 33.6 sq mm (2 AWG)

Newark.com/multicomp-pro


Farnell.com/multicomp-pro

sg.element14.com/b/multicomp-pro

Input Technical Specifications

Parameters	Unit	RDA
Control Voltage Range	V	4-32V DC
Reverse Polarity Protection	-	Yes
Control Supply Current Consumption	mA	4-16 mA
Input Impedance (Current Regulator Circuit Impedance)	Ω	1k Ω -2k Ω
Minimum Turn ON Voltage	V DC	3.5V DC
Turn OFF Voltage	VDC	< 2.5 V DC
Control Input Status Indication	-	Green LED Indication
Maximum Turn ON Time	ms	<50 μ s
Maximum Turn ON Time	ms	< 1/2 Cycle (10 ms)

Block Diagram RDA- Random On DC TO AC

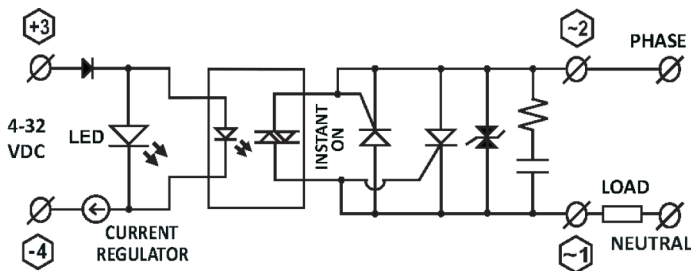

Output Technical Specifications @ 25°C Unless Specified

Parameters	Symbol	Unit	40Amp
Operating Voltage Range	V_{AC}	V_{RMS}	24-480V AC - 30, TRIAC
Operating Frequency Range	f	Hz	47-63 Hz
Peak Inverse Voltage	PIV	V_{PK}	800
Max. Surge Voltage With Stand Capacity (<1 Second)	V_{Surge}	V_{RMS}	2700 V_{RMS} (3800 V_{PK})
Rated Operational Current AC51a @ 20°C (Resistive Load)	I_T	Amp	40
Maximum Load Short Circuit Protection Current @ 55°C	I_{sc}	Amp	--
"B" Curve D.P. MCB Rating for Short Circuit Protection	--	Amp	--
NON Repetitive Surge Peak ON-State Current @ Rated V_{RMS} applied for 1/2 Cycle $t=10$ mS / $t=8.33$ mS (50 Hz/60 Hz)	I_{TSM} @50 Hz	AP	420
	I_{TSM} @60 Hz	AP	441

Solid State Relay

multicomp PRO

Max. I ² t for Fusing @ t=10 mS (50Hz)	I ² t	A ² S	880
Max. I ² t for Fusing @ t=8.33 mS (60Hz)	I ² t	A ² S	795
Max. Peak ON-state voltage Drop at Full Control	V _{TM}	V _{RMS}	≤1.2
Minimum Isolation Resistance between Input Terminals (+3,-4) to Output Terminals (~1,~2) @ 500V DC	Ω	GΩ	50
Isolation Voltage Input Terminals (+3,-4) to Output Terminals (-1,-2) for 1 Minute (RDA type)	V _{ISO}	kV	6
Isolation Voltage Input & Output Terminals (+3,-4,-1,-2) to Body Isolation for 1 Minute	V _{ISO}	kV	6
Max. Rate of Rise OFF-State Voltage	dV/dt	V/μS	500
Max. Rate of Rise OFF-State Current	di/dt	A/μS	50
Max. Peak Repetitive Forward OFF-State Voltage	I _{DRM}	V	800
Max. Peak Repetitive Forward OFF-State current	I _{DRM}	mA	0.05
Max. Peak repetitive reverse off-state Voltage	V _{RRM}	V	800
Max. Peak repetitive reverse off-state current	I _{RRM}	mA	0.05
Max. DC Gate Trigger Voltage	V _{GT}	V	1.5
Max. DC Gate Trigger Current	I _{GT}	mA	50
Turn OFF Time	t _q	μS	35
Maximum Latching Current	I _L	mA	100
Maximum Holding Current	I _H	mA	60
Thermal Resistance Re (Junction to case)	R ^θ (j-c)	°C/W	0.52
OFF State SSR Leakage Current @ Rated Voltage & Frequency (Snubber Leakage)	I _{leak}	mA	For 230V AC <1mA
			For 440V AC <2 mA
SCCR Current Rating (less than 100 1S)	I _{SCCR}	kA	--
Weight	W	gm	≤110

Part Number Table

Description	Part Number
Solid State Relay With Snubber, 4-32V DC, 24-480V AC, 40A	MP-RDA 48 40 01 AL5

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO