

Part No. 9000440F0

GPS/GLONASS/Beidou/Galileo FPC Antenna

1.560 GHz, 1.575 GHz, 1.598 GHz, 1.606 GHz

Supports: Tracking, Smart Home, Agriculture, Healthcare, Digital Signage, Wearables, Industrial Devices



KYOCERA AVX's embedded GNSS Antenna delivers high RF performance and functionality in M2M designs where a more standard GPS patch approach is not possible. This innovative antenna provides compelling advantages for GNSS enabled M2M / IoT applications such as vehicle tracking or asset tracking. Based on a flexible substrate, this GNSS antenna can maintain high efficiency in various device configurations. In addition, the 9000440F0 antenna can be integrated easily into the end product.

GPS / GLONASS / Beidou / Galileo FPC Antenna

1.560 GHz, 1.575 GHz,
1.598 GHz, 1.606 GHz

KEY BENEFITS

Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Reliability

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- POS, Gateway, Handheld
- Telematics
- Tracking
- Healthcare
- M2M, Industrial devices
- Smart Grid
- OBD-II

Electrical Specifications

Typical characteristics with 150 mm cable, antenna is mounted directly on plastic material.

Frequency (GHz)	1.559 – 1.563	1.575	1.559 – 1.591	1.593 – 1.610
GNSS Bands	Beidou	GPS	Galileo	Glomass
Peak Gain (dBi)	2.4	2.4	2.5	2.5
Efficiency (%)	49	47	50	46
VSWR	< 2.3:1			
Polarization	Linear			
Radiation Pattern	Omni-directional			
Feed Point Impedance	50 Ω unbalanced			

Mechanical Specifications & Ordering Part Number

Ordering Part Number	9000440F0-AA12L0150
Dimensions (mm)	41.0 $\pm$ 0.2 length 15.5 $\pm$ 0.2 width
Connector Type	U.FL compatible
Weight (grams)	0.85
Cable (mm)	150
Operating Temperature Range (°C)	[-40°C ~+ 85°C]


GNSS KYOCERA AVX FPC Embedded Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs..

VSWR Efficiency, and Peak Gain Plots


Typical characteristics with 150 mm cable,
antenna is mounted directly on plastic material.




VSWR

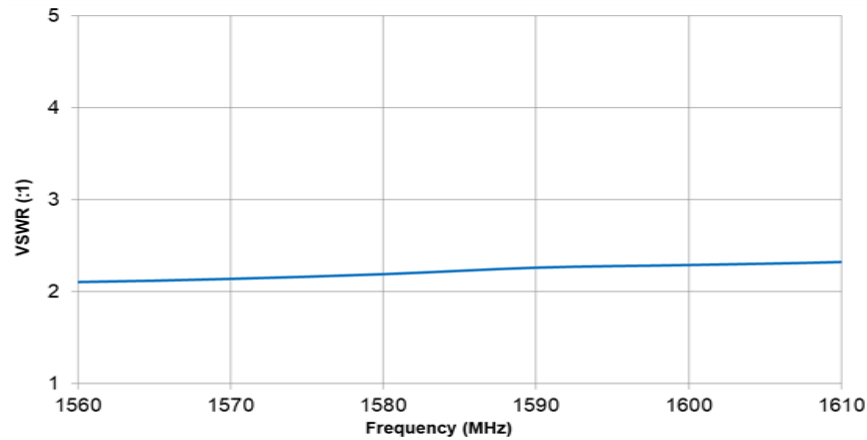

Efficiency

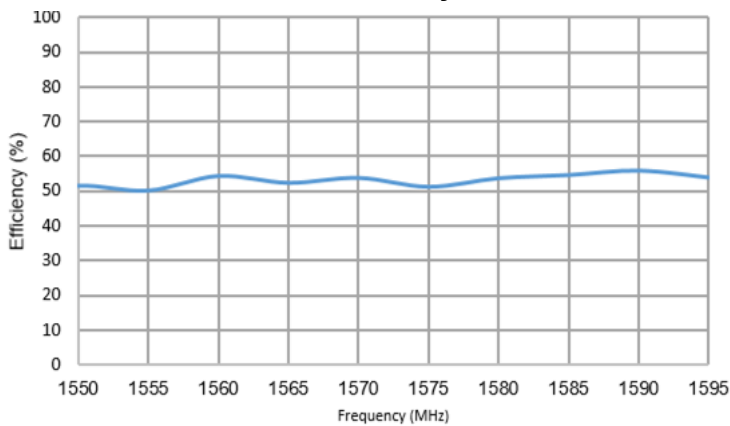



Peak Gain

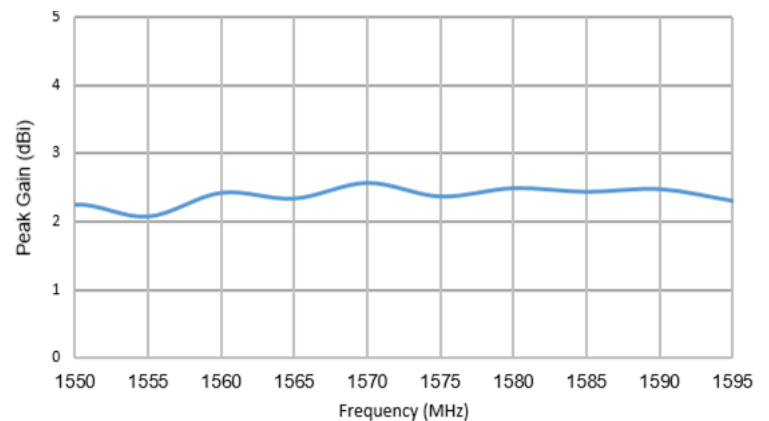

GNSS KYOCERA AVX FPC Embedded Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs..

VSWR and Peak Gain Plots

Typical characteristics with 150 mm cable,
antenna is mounted directly on plastic material.

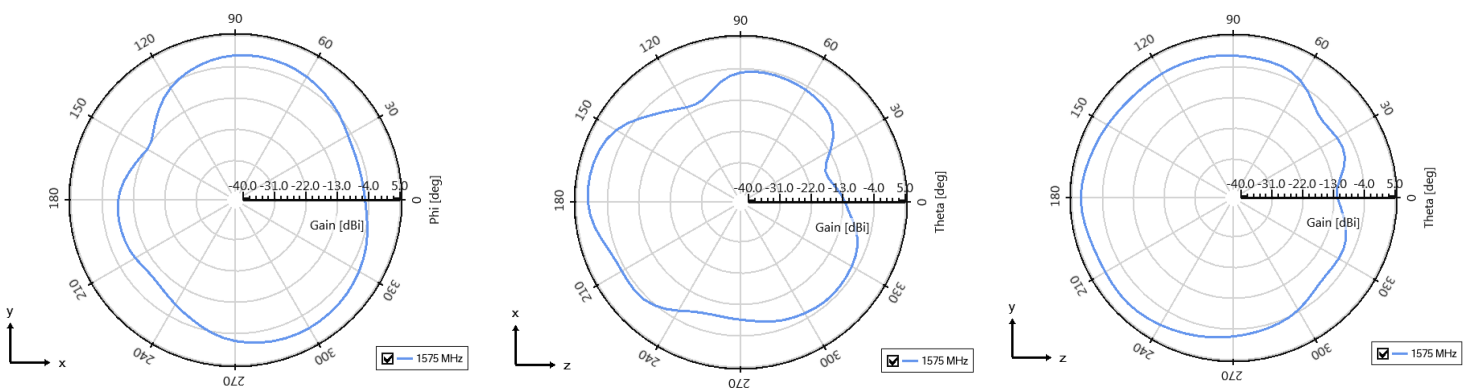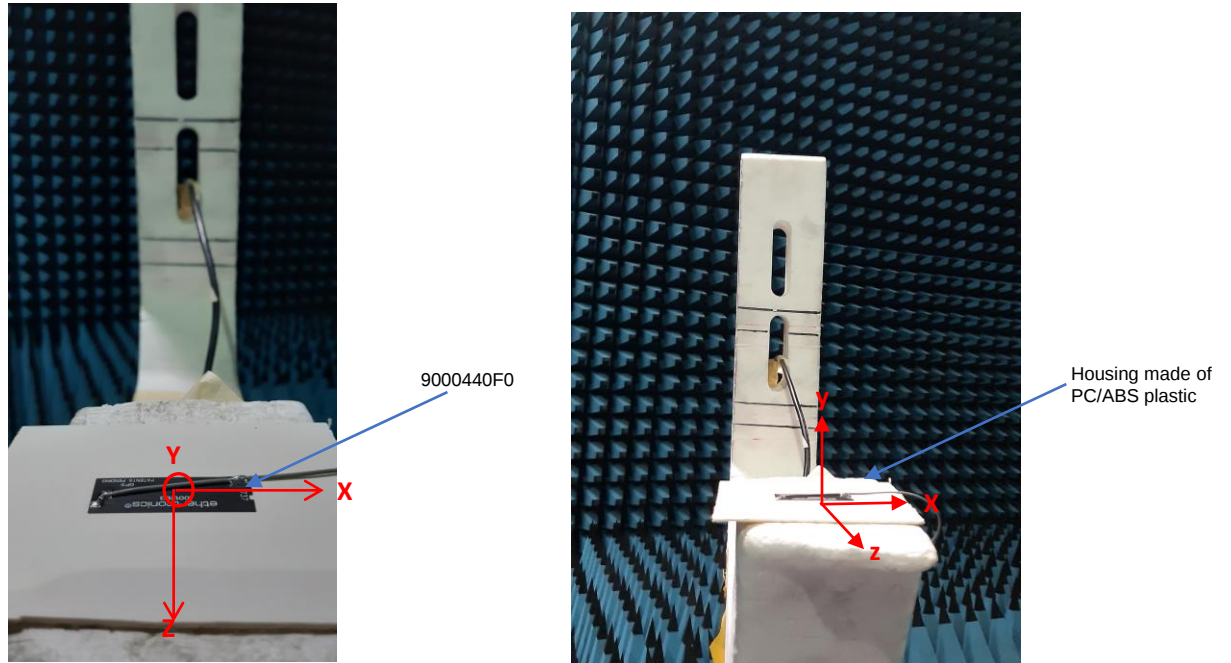


GNSS KYOCERA AVX FPC Embedded Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs..

Mechanical Dimensions

Typical antenna dimensions (mm)

PN	A (mm)	B (mm)	Thickness C (mm)	Lenth Cable L (mm)
9000440F0-AA12L0050	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	50
9000440F0-AA12L0100	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	100
9000440F0-AA12L0150	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	150
9000440F0-AA12L0200	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	200
9000440F0-AA12L0250	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	250
9000440F0-AA12L0300	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	300
9000440F0-AA12LXXXX	41.0 ± 0.2	15.5 ± 0.2	0.14 ± 0.2	XXXX

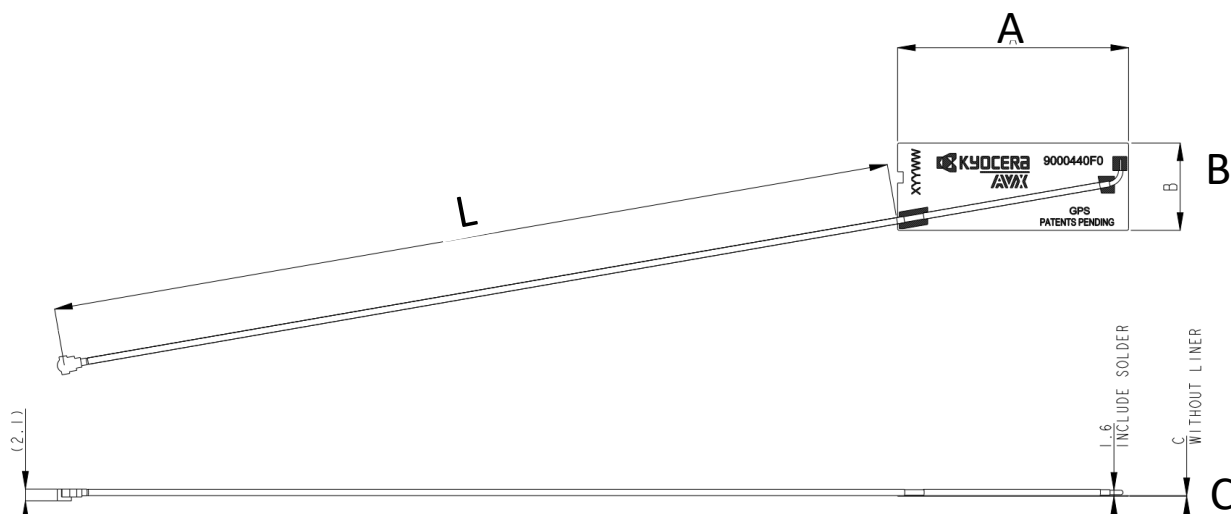

XXXX (mm)	CONDITION	TOLERANCE Z
0050	XXXX < 150	± 3.0
0100		
OTHER XXXX		
0150	150 ≤ XXXX < 300	± 4.0
0200		
0250		
OTHER XXXX	300 ≤ XXXX < 500	± 5.0
0300		
0400		
OTHER XXXX	500 ≤ XXXX < 1000	± 7.0
0500		
0600		
OTHER XXXX	1000 ≤ XXXX	± 1%
1000		
OTHER XXXX		

XXXX = CABLE LENGTH MENTIONED IN PART NUMBER (CUSTOMER REQUEST)
Z = TOLERANCE FOR XXXX DIMENSION