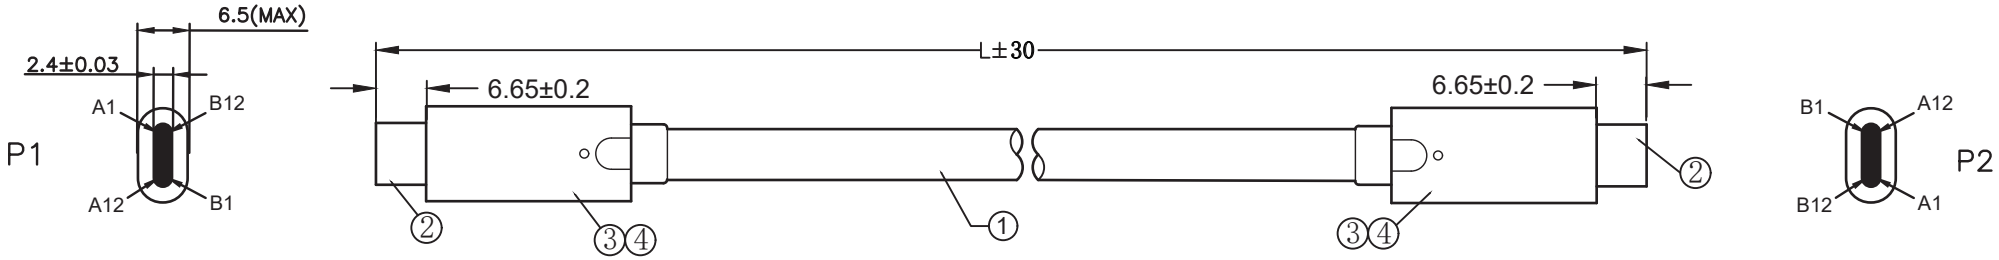

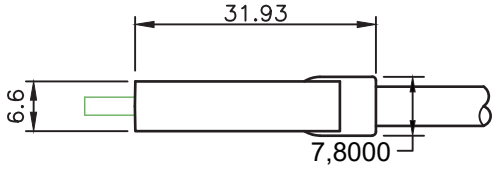

Electric Test:

1. No open,short circuit, wrong connection,poor insulation.
2. Contact Resistance: 3Ω MAX
3. Insulation Resistance: 5MΩ MIN
4. Electric Voltage: DC 300V
5. Data Transfer: 10Gbps MAX
6. PD: 100W MAX

Specification :

1.	Cable	[1P(32AWG)+AL+HM]*4 + 1P(32AWG) + 4C(32AWG) + 2C(24AWG)+ DAM, Jacket: Black PVC, OD: 5.0mm
2.	Conn.	USB Type C Plug, with E-mark IC, Conductor: Gold Plated, Shell: Nickel Plated
3.	Inner Molding	LDPE
4.	Outer Molding	Black PVC: 35P

WIRE TABLE

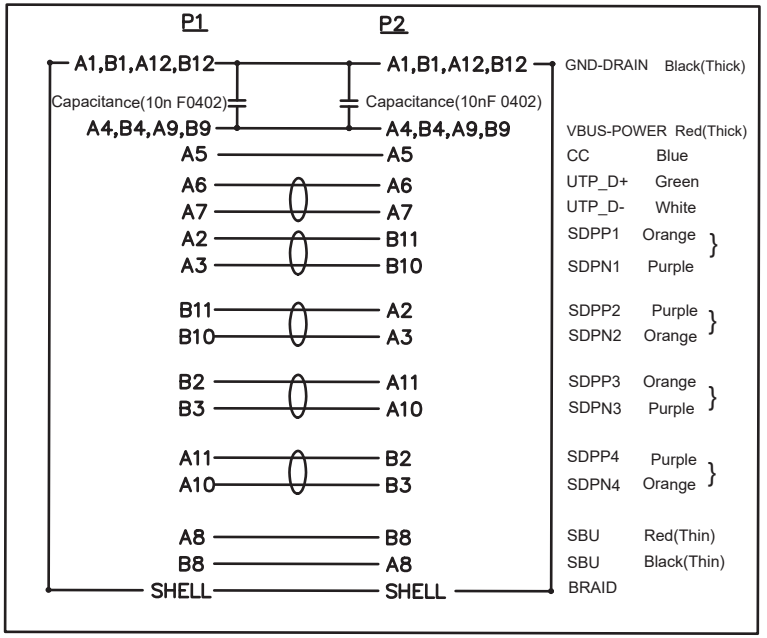

SECOMP	Product Name	ROLINE USB3.2 Gen2 Cable, C-C, M/M, 3m, black	Approve	Check	Draw	Design	Rev.	Date	Contents of Change	Design
			Allen	Allen	Oswald	Oswald	1			
Issue Date : 2024/8/7	Product No.	11.02.9065		Scale 1:1	Unit : mm		2			
							3			